

CATALOGUE 2024 / 2025



**INDOOR
AUTOMATION**



**INDOOR
LIGHTING**



**OUTDOOR
AUTOMATION**



**OUTDOOR
LIGHTING**

**INNOVATIONS FOR
INTELLIGENT
AUTOMATION AND
LIGHTING SOLUTIONS**

PERFORMANCE FOR SIMPLICITY

ESYLUX GmbH | sales@esylux.com | www.esylux.com

CONTENT

INDOOR AUTOMATION

PRESENCE AND MOTION DETECTORS 04 - 53

	ATMO	04 - 07
	COMPACT	08 - 17
	COMPACT MINI	18 - 23
	COMPACT EXPRESS	24 - 27
	FLAT	28 - 33
	FLAT MINI	34 - 37
	STANDARD	38 - 43
	BASIC	44 - 49
	BASIC EXPRESS	50 - 53

BRIGHTNESS CONTROLLER 54 - 57

	FLAT MINI	54 - 57
---	-----------	---------

CONTROLS 58 - 61


	SMARTDRIVER	58 - 61
--	-------------	---------

SMOKE DETECTORS 62 - 65



	PROTECTOR	62 - 65
--	-----------	---------

INDOOR LIGHTING




LIGHTING SYSTEMS 66 - 75

	QUADRO-SETS	66 - 69
	ELC FREELY CONFIGURABLE	70 - 75

RECESSED LIGHTS 76 - 83

	CELINE-2	76 - 79
	STELLA	80 - 83

WALL AND CEILING LIGHTS 84 - 95

	ALMA	84 - 87
	ELLEN	88 - 91
	SVENJA	92 - 95

DOWNLIGHTS 96 - 101

	ELSA-2	96 - 101
---	--------	----------

MOISTURE-PROOF LIGHTS 102 - 105

	OLIVIA-2	102 - 105
---	----------	-----------

ECODESIGN DIRECTIVE

With the Ecodesign Directive coming into force on 1 September 2021, we not only label products classified as light sources with the required energy efficiency indices as required by law (see label example 1). To create maximum transparency for you, we also indicate the energy efficiency of the light source contained in surrounding products (LED, see example 2). Both details can be found in the Energy efficiency class column.

Example light source

ELSA-2 (LED module not removable)

ELSA-2 DL Z25 OP 110° 1800 830 DALI WH (white, similar to RAL 9003)	E010298943	830	1700 lm	19 W	89 lm/W	≤25	OP	IP44	DALI		X240, Z25	BS	•
--	------------	-----	---------	------	---------	-----	----	------	------	---	-----------	----	---









Example surrounding product

ELSA-2 with detector (LED module removable)


ELSA-2 DL Z25 OP 110° 1800 830 MD IR WH (white, similar to RAL 9003)	E010299025	830	1650 lm	17,5 W	94 lm/W	≤25	OP	IP20	ON/OFF	•		X240, Z60	BY	•
---	------------	-----	---------	--------	---------	-----	----	------	--------	---	---	-----------	----	---

INDOOR LIGHTING

EMERGENCY LIGHTS 106 – 139






	ELH	106 – 109
	ELX	110 – 113
	SLG	114 – 117
	SLA	118 – 121
	SLB	122 – 125
	SLC/SLD	126 – 129
	SLE/SLF	130 – 133
	SLX	134 – 139

PORTABLE SPOTLIGHT 140 – 143



	SLP-2	140 – 143
--	-------	-----------

OUTDOOR AUTOMATION

MOTION DETECTORS 144 – 163


	RC	144 – 147
	DEFENSOR	148 – 151
	MD-W	152 – 155
	MD	156 – 159
	BASIC	160 – 163

TWILIGHT SWITCHES 164 – 171


	DEFENSOR	164 – 167
	CDS	168 – 171

OUTDOOR LIGHTING



WALL LIGHTS 172 – 179

	AL	172 – 175
	OL/AOL	176 – 179

BOLLARD LIGHTS 180 – 187

	ALVA	180 – 187
---	------	-----------

FLOODLIGHTS 188 – 197

	BASIC OFL/AFL	188 – 191
	SUN OFL/AFL	192 – 197

INFORMATION

DALI-2 takes you to the future One standard for all options	198 – 211
---	-----------

ESYLUX Light Control ELC Modernise lighting in an energy-efficient manner with plug and play	212 – 219
--	-----------

Always ready with the right tool: Thanks to the ESY-Pen and ESY-App!	220 – 221
--	-----------

The difference Presence and motion detectors	222
--	-----

Diffusers and colour temperature An overview	223
--	-----

Covers for wall detectors Compatible with brand switches	224 – 225
--	-----------

Product naming Simply decoded	226 – 233
---	-----------

NEW: ESYLUX CORE PORTFOLIO WITH SHORT DELIVERY TIMES

For all products of our core portfolio, particularly short delivery times apply. In order to provide our customers with targeted access to these, associated products are marked accordingly in the catalogue. You can find out the exact delivery times by clicking on an icon on each item in the product section of the ESYLUX website.

This catalogue contains the international product portfolio of ESYLUX. For country-specific availability, please refer to the product section of our website.

- Extensive multi-sensor elements for intelligent light and HVAC control
- Visual or acoustic warning for demand-driven ventilation

5 YEARS
MANUFACTURER
WARRANTY



Thanks to its unique multi-sensor elements, the ATMO KNX presence detector ensures not only an optimal level of brightness, but also a healthy and productive ambient climate in the room. With a total of six sensors in just one device, there is no need for several individual solutions. This shows just how easy it is to accommodate complex requirements using intelligent technology.

ATMO

MULTI-SENSORICALLY OPTIMISING THE ROOM CLIMATE

Comprehensive multi-sensor system for intelligent light and HVAC control

Demand-driven light switching or automatic light control at a constant brightness level depending on presence and daylight (constant light control)

Measurement of the ambient temperature as heat reflection of surfaces in the room (furniture, floors, walls); facilitates a constant temperature level regardless of short-term changes (e.g. temporary ventilation, open door etc.)

Variant (ATMO O) with additional measurement of VOCs (volatile organic compounds) for optimal control of the air quality; alternatively to automatic control, a visual or acoustic warning can be issued if a limit value is exceeded (for manual ventilation in line with demand)

Simple adjustment of the range and field of detection due to the lens cover, which can be cut to size

Variants (ATMO A/O) with additional measurement of relative humidity for dew point calculation (e.g. to prevent mould growth in rarely used rooms)

Built-in acoustic sensor system to support PIR sensor systems in complex and angular rooms

**Air quality (VOC)****Humidity****Temperature****Light****Passive infrared (presence)****Acoustic (presence)****PD-ATMO 360i/8 O AUX 30V KNX****PD-ATMO 360i/8 A KNX****PD-ATMO 360i/8 T KNX**

PRODUCT TYPES		FIELD OF DETECTION	DETECTION RANGE	
				Ceiling 8 m
			■ Diagonally (A)	Ø 8 m
			■ Frontal (B)	Ø 6 m
			■ Presence area (C)	Ø 4 m

Note: Technical data for specific products can be found at www.esylux.com.




- Comprehensive multi-sensor system for intelligent light and HVAC control
- Demand-driven light switching or automatic light control at a constant brightness level depending on presence and daylight (constant light control)
- Measurement of the ambient temperature as heat reflection of surfaces in the room (furniture, floors, walls); facilitates a constant temperature level regardless of short-term changes (e.g. temporary ventilation, open door etc.)
- Variants (ATMO A/O) with additional measurement of relative humidity for dew point calculation (e.g. to prevent mould growth in rarely used rooms)
- Variant (ATMO O) with additional measurement of VOCs (volatile organic compounds) for optimal control of the air quality; alternatively to automatic control, a visual or acoustic warning can be issued if a limit value is exceeded (for manual ventilation in line with demand)
- Built-in acoustic sensor system to support PIR sensor systems in complex and angular rooms
- Simple adjustment of the range and field of detection due to the lens cover, which can be cut to size

Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Function	Constant lighting control	Push button input lighting	In-rush current	Adjustable switch-off delay time	Number of HVAC-channels	Push button input HVAC	Slave input	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Presence detectors / Ceiling mounting / KNX																		
KNX																		
PD-ATMO 360i/8 T KNX (white, similar to RAL 9010)	EP10427213	360°	Ø 8 m	FM	2	Switching/Regulate	•	2		•	1	•	•	IP20	X 108, Z 38	0	•	
PD-ATMO 360i/8 A KNX (white, similar to RAL 9010)	EP10427206	360°	Ø 8 m	FM	2	Switching/Regulate	•	2		•	1	•	•	IP20	X 108, Z 38	0	•	
PD-ATMO 360i/8 O AUX 30V KNX (white, similar to RAL 9010)	EP10427664	360°	Ø 8 m	FM	2	Switching/Regulate	•	2		•	1	•	•	IP20	X 108, Z 74	AU	•	★


Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Mounting					
COMPACT MOUNTING BOX IP20 SM WH	EP10425370	Surface-mounted box for COMPACT series, IP20, white	X 104, Z 30	•	
COMPACT MOUNTING BOX IP54 SM WH	EP10425905	Surface-mounted box for COMPACT series, IP54, white	X 104, Z 30	•	
MOUNTING SET IP20 FM 62 WH	EP10425929	Recessed ceiling mounting set includes installation bracket and dust-protected box, 62 mm	X 63, Z 62	•	
Protection					
BASKET GUARD ROUND LARGE	EM10425608	Basket guard for presence and motion detectors and smoke detectors, Ø 180 mm, height 90 mm	X 180, Z 90	•	
BASKET GUARD ROUND SMALL	EM10425615	Basket guard for presence and motion detectors and smoke detectors, Ø 165 mm, height 70 mm	X 165, Z 70	•	
Remote control					
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•	
REMOTE CONTROL PDI/USER	EM10425547	IR remote control for end users of presence detectors	X 100, Y 50, Z 9	•	
TELESCOPE MAGNET	EC10430022	Telescope magnet		•	

AU



Standard operation.

0



Standard operation.

- Offers numerous variants for multi-channel light and HVAC control
- One design for all applications within a building
- Two-piece housing for simple installation

5 YEARS
MANUFACTURER
WARRANTY



The COMPACT presence and motion detectors have successfully built themselves a reputation among our range of sensors as traditional favourites and true all-rounders. Their robust design and high level of performance are just as impressive as their huge versatility in terms of applications: Whether ceiling or wall detector, whether 230 V, KNX, DALI or DALI-2, whether switching, dimming or HVAC, they ensure a perfect combination of convenience and energy efficiency at all times — and offer an innovative solution with touch-sensitive lens surfaces due to the touch detectors.



Parameterisable with ESY-Pen and ESY-App. More on pages 220 – 221 and at: esylux.com/esy-pen.

COMPACT

INNOVATION VARIETY FOR INDIVIDUAL CONTROL

On-demand lighting switching (230 V, 12 – 36 V) or presence- and daylight-dependent constant light control (1 – 10 V, DALI, DALI-2 or KNX)

Variants for wall and ceiling flush mounting, ceiling surface mounting and recessed mounting

Covers and frame for wall detector available as an accessory

Compatible with conventional brand switch systems for a uniform design

Two-piece housing (sensor head and power box) for quick, simple installation

Numerous adjustment options via DIP, remote control or adjustment control

Integrated toggle: setting with remote control or adjustment control (to prevent operating errors and to provide sabotage protection)




Control of LED lights via high-performance relay with tungsten pre-contact (230 V)

Switching delay prevents switching errors due to short-term change in brightness



Manual override with stairwell light function on detectors with push button input



PRODUCT TYPES



FIELD OF DETECTION



DETECTION RANGE

	Ceiling 8 m	Ceiling 24 m	Ceiling 32 m	Ceiling 32 m	Wall 16 m
■ Diagonally (A)	Ø 8 m	Ø 24 m	Ø 32 m	32 m (elliptical)	Ø 16 m
■ Frontal (B)	Ø 6 m	Ø 11 m	Ø 11 m	Ø 20 m	Ø 12 m
■ Presence area (C)	Ø 4 m	Ø 8 m	Ø 8 m	-	Ø 8 m

Note: Technical data for specific products can be found at www.esylux.com.

COMPACT

INDOOR AUTOMATION / PRESENCE AND MOTION DETECTORS



- On-demand lighting switching (230 V, 12 – 36 V) or presence- and daylight-dependent constant light control (1 – 10 V, DALI, DALI-2 or KNX)
- Variants for wall and ceiling flush mounting, ceiling surface mounting and recessed mounting
- Covers and frame for wall detector available as an accessory
- Compatible with conventional brand switch systems for a uniform design
- Two-piece housing (sensor head and power box) for quick, simple installation
- Numerous adjustment options via DIP, remote control or adjustment control
- Integrated toggle: setting with remote control or adjustment control (to prevent operating errors and to provide sabotage protection)
- Control of LED lights via high-performance relay with tungsten pre-contact (230 V)
- Switching delay prevents switching errors due to short-term change in brightness
- Manual override with stairwell light function on detectors with push button input
- Orientation light function on detectors with 1 – 10 V, DALI, DALI-2 or KNX
- Simple parameterisation, remote control and documentation of remotely controlled variants via ESY-Pen and ESY-App

* With additional DALI actuator ACTUATOR C3/C4 DALI as accessory.

Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Function	Constant lighting control	Push button input lighting	In-rush current	Adjustable switch-off delay time	Number of HVAC-channels	Push button input HVAC	Slave input	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Motion detectors / Ceiling mounting / ON/OFF																		
ON/OFF																		
MD-C 360i/8 (white, similar to RAL 9010)	EP10055393	360°	Ø 8 m	FM	1	Switching		1	800 A / 200 µs	•				IP20	X 108, Z 62	A	•	
MD-C 360i/8 BK (black, similar to RAL 9005)	EP10055416	360°	Ø 8 m	FM	1	Switching		1	800 A / 200 µs	•				IP20	X 108, Z 62	A	•	★
MD-C 360i/8 FM (white, similar to RAL 9010)	EP10055539	360°	Ø 8 m	RM	1	Switching		1	800 A / 200 µs	•				IP20	X 108, Z 98	A	•	★
MD-C 360i/8 MIC (white, similar to RAL 9010)	EP10425875	360°	Ø 8 m	FM	1	Switching		1	800 A / 200 µs	•				IP20	X 108, Z 62	A	•	
MD-C 360i/8 WAGO WINSTA CodeA (white, similar to RAL 9010)	EP10424809	360°	Ø 8 m	RM	1	Switching		1	800 A / 200 µs	•				IP20	X 108, Z 99	A	•	
MD-C 360i/24 (white, similar to RAL 9010)	EP10055317	360°	Ø 24 m	FM	1	Switching		1	800 A / 200 µs	•				IP20	X 108, Z 70	A	•	
MD-C 360i/24 BK (black, similar to RAL 9005)	EP10055546	360°	Ø 24 m	FM	1	Switching		1	800 A / 200 µs	•				IP20	X 108, Z 70	A	•	★
MD-C 360i/24 FM (white, similar to RAL 9010)	EP10055560	360°	Ø 24 m	RM	1	Switching		1	800 A / 200 µs	•				IP20	X 108, Z 106	A	•	★
MD-C 360i/24 WAGO WINSTA CodeA (white, similar to RAL 9010)	EP10424816	360°	Ø 24 m	RM	1	Switching		1	800 A / 200 µs	•				IP20	X 108, Z 107	A	•	
MD-C 360i/32 Corridor (white, similar to RAL 9010)	EP10428128	360°	32 m elliptical	FM	1	Switching		1	800 A / 200 µs	•				IP20	X 108, Z 70	A	•	
MD-C 360i/32 (white, similar to RAL 9010)	EP10427749	360°	Ø 32 m	FM	1	Switching		1	800 A / 200 µs	•				IP20	X 108, Z 70	A	•	
Presence detectors / Ceiling mounting / 1 – 10 V																		
1 – 10 V																		
PD-C 360i/32 Warehouse DIM plus (white, similar to RAL 9010)	EP10425783	360°	32 m elliptical	FM	1	Switching/Regulate	•	1	800 A / 200 µs	•	1	•	•	IP20	X 108, Z 70	H	•	
Presence detectors / Ceiling mounting / 12 – 36 V UC																		
12 – 36 V UC																		
PD-C 360i/8 UC (white, similar to RAL 9010)	EP10427312	360°	Ø 8 m	FM	1	Switching/Send values	•	1		•				IP20	X 108, Z 62	M	•	
PD-C 360i/24 UC (white, similar to RAL 9010)	EP10427329	360°	Ø 24 m	FM	1	Switching/Send values	•			•				IP20	X 108, Z 70	M	•	
Presence detectors / Ceiling mounting / ELC																		
ELC																		
PD-C 360i/8 ELC (white, similar to RAL 9010)	EP10427602	360°	Ø 8 m	FM	4	Send values	•			•	2			IP20	X 108, Z 62	P	•	
PD-C 360i/24 ELC (white, similar to RAL 9010)	EP10427619	360°	Ø 24 m	FM	4	Send values	•			•	2			IP20	X 108, Z 70	P	•	

Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Function	Constant lighting control	Push button input lighting	In-rush current	Adjustable switch-off delay time	Number of HVAC-channels	Push button input HVAC	Slave input	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Presence detectors / Ceiling mounting / KNX																		
KNX																		
PD-C 360i/8 KNX UP (white, similar to RAL 9010)	EP10427404	360°	Ø 8 m	FM	2	Switching/Regulate	•	2		•	1	•	•	IP20	X 108, Z 62	O	•	
PD-C 360i/8 KNX UP BK (black, similar to RAL 9005)	EP10427534	360°	Ø 8 m	FM	2	Switching/Regulate	•	2		•	1	•	•	IP20	X 108, Z 62	O	•	★
PD-C 360i/8 FM KNX UP (white, similar to RAL 9010)	EP10428821	360°	Ø 8 m	RM	2	Switching/Regulate	•	2		•	1	•	•	IP20	X 108, Z 98	O	•	★
PD-C 360i/24 KNX ECO UP (white, similar to RAL 9010)	EP10427435	360°	Ø 24 m	FM	2	Switching		1		•		•		IP20	X 108, Z 70	O	•	
PD-C 360i/24 KNX UP (white, similar to RAL 9010)	EP10427428	360°	Ø 24 m	FM	2	Switching/Regulate	•	2		•	1	•	•	IP20	X 108, Z 70	O	•	
PD-C 360i/24 KNX UP BK (black, similar to RAL 9005)	EP10427671	360°	Ø 24 m	FM	2	Switching/Regulate	•	2		•	1	•	•	IP20	X 108, Z 70	O	•	★
PD-C 360i/24 FM KNX UP (white, similar to RAL 9010)	EP10428838	360°	Ø 24 m	RM	2	Switching/Regulate	•	2		•	1	•	•	IP20	X 108, Z 106	O	•	★
PD-C 360i/32 KNX (white, similar to RAL 9010)	EP10427794	360°	Ø 32 m	FM	2	Switching/Regulate	•	2		•	1	•	•	IP20	X 108, Z 70	O	•	
Presence detectors / Ceiling mounting / ON/OFF																		
ON/OFF																		
PD-C 360/8 Slave (white, similar to RAL 9010)	EP10055379	360°	Ø 8 m	FM		Send values							•	IP20	X 108, Z 62	C	•	
PD-C 360/8 Slave BK (black, similar to RAL 9005)	EP10055553	360°	Ø 8 m	FM		Send values							•	IP20	X 108, Z 62	C	•	★
PD-C 360/8 Slave FM (white, similar to RAL 9010)	EP10426971	360°	Ø 8 m	RM		Send values							•	IP20	X 108, Z 98	C	•	★
PD-C 360i/8 (white, similar to RAL 9010)	EP10425059	360°	Ø 8 m	FM	1	Switching		1	800 A / 200 µs	•			•	IP20	X 108, Z 62	B	•	
PD-C 360i/8 BK (black, similar to RAL 9005)	EP10425233	360°	Ø 8 m	FM	1	Switching		1	800 A / 200 µs	•			•	IP20	X 108, Z 62	B	•	★
PD-C 360i/8 FM (white, similar to RAL 9010)	EP10426858	360°	Ø 8 m	RM	1	Switching		1	800 A / 200 µs	•			•	IP20	X 108, Z 98	B	•	★
PD-C 360i/8 plus (white, similar to RAL 9010)	EP10425042	360°	Ø 8 m	FM	1	Switching		1	800 A / 200 µs	•	1		•	IP20	X 108, Z 62	D	•	
PD-C 360i/8 MIC (white, similar to RAL 9010)	EP10425882	360°	Ø 8 m	FM	1	Switching		1	800 A / 200 µs	•			•	IP20	X 108, Z 62	B	•	
PD-C 360i/8 WAGO WINSTA CodeA (white, similar to RAL 9010)	EP10424823	360°	Ø 8 m	RM	1	Switching		1	800 A / 200 µs	•			•	IP20	X 108, Z 99	B	•	
PD-C 360/24 Slave (white, similar to RAL 9010)	EP10055386	360°	Ø 24 m	FM		Send values							•	IP20	X 108, Z 70	C	•	
PD-C 360/24 Slave FM (white, similar to RAL 9010)	EP10428777	360°	Ø 24 m	RM		Send values							•	IP20	X 108, Z 106	C	•	★
PD-C 360i/24 DUOplus (white, similar to RAL 9010)	EP10425295	360°	Ø 24 m	FM	2	Switching		2	30 A / 20 ms	•	1	•	•	IP20	X 108, Z 70	DB	•	
PD-C 360i/24 (white, similar to RAL 9010)	EP10428067	360°	Ø 24 m	FM	1	Switching		1	800 A / 200 µs	•			•	IP20	X 108, Z 70	B	•	
PD-C 360i/24 BK (black, similar to RAL 9005)	EP10425257	360°	Ø 24 m	FM	1	Switching		1	800 A / 200 µs	•			•	IP20	X 108, Z 70	B	•	★
PD-C 360i/24 FM (white, similar to RAL 9010)	EP10426865	360°	Ø 24 m	RM	1	Switching		1	800 A / 200 µs	•			•	IP20	X 108, Z 106	B	•	★
PD-C 360i/24 DRY (white, similar to RAL 9010)	EP10425707	360°	Ø 24 m	FM	1	Switching		1	5 A	•			•	IP20	X 108, Z 70	E	•	
PD-C 360i/24 plus (white, similar to RAL 9010)	EP10425288	360°	Ø 24 m	FM	1	Switching		1	800 A / 200 µs	•	1		•	IP20	X 108, Z 70	D	•	
PD-C 360i/24 DUOplus-FM (white, similar to RAL 9010)	EP10426803	360°	Ø 24 m	FM	2	Switching		2	800 A / 200 µs	•	1	•	•	IP20	X 108, Z 70	F	•	
PD-C 360i/24 DUOplus-SM (white, similar to RAL 9010)	EP10426810	360°	Ø 24 m	SM	2	Switching		2	800 A / 200 µs	•	1	•	•	IP20	X 108, Z 74	G	•	
PD-C 360i/24 WAGO WINSTA CodeA (white, similar to RAL 9010)	EP10424830	360°	Ø 24 m	RM	1	Switching		1	800 A / 200 µs	•			•	IP20	X 108, Z 107	B	•	
PD-C 360/32 Warehouse Slave (white, similar to RAL 9010)	EP10425790	360°	Ø 32 m	FM		Send values							•	IP20	X 108, Z 70	C	•	
PD-C 360i/32 Corridor (white, similar to RAL 9010)	EP10428180	360°	32 m elliptical	FM	1	Switching		1	800 A / 200 µs	•			•	IP20	X 108, Z 70	B	•	
PD-C 360/32 Slave (white, similar to RAL 9010)	EP10427770	360°	Ø 32 m	FM		Send values							•	IP20	X 108, Z 70	C	•	
PD-C 360i/32 (white, similar to RAL 9010)	EP10427756	360°	Ø 32 m	FM	1	Switching		1	800 A / 200 µs	•			•	IP20	X 108, Z 70	B	•	
PD-C 360i/32 plus (white, similar to RAL 9010)	EP10427763	360°	Ø 32 m	FM	1	Switching		1	800 A / 200 µs	•	1		•	IP20	X 108, Z 70	D	•	
Presence detectors / Wall mounting / 12 - 36 V UC																		
12 - 36 V UC																		
PD-C 180i/16 UC (opal matt)	EP10427305	180°	Ø 16 m	FM	1	Switching/Send values	•	1		•				IP20	X 70, Y 70, Z 55	CU	•	

Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Function	Constant lighting control	Push button input lighting	In-rush current	Adjustable switch-off delay time	Number of HVAC-channels	Push button input HVAC	Slave input	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Presence detectors / Wall mounting / KNX																		
KNX																		
PD-C 180i KNX ECO (white, similar to RAL 9010)	EP10426452	180°	Ø 16 m	FM	2	Switching		1		•			•	IP20	X 70, Y 70, Z 55	0	•	
PD-C 180i KNX (white, similar to RAL 9010)	EP10426445	180°	Ø 16 m	FM	2	Switching/Regulate	•	1		•	1		•	IP20	X 70, Y 70, Z 53	0	•	
PD-C 180i/16 Touch KNX (white, similar to RAL 9010)	EP10460104	180°	Ø 16 m	FM	2	Switching/Regulate	•	1		•	1	•	•	IP40	X 70, Y 70, Z 55	0	•	

Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Number of light groups	Function	Constant lighting control	SymbiLogic	Push button input lighting	Adjustable switch-off delay time	Number of HVAC-channels	DALI-2 device type	Push button input HVAC	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Presence detectors / Ceiling mounting / DALI																			
DALI																			
PD-C 360i/8 DUO DALI (white, similar to RAL 9010)	EP10427442	360°	Ø 8 m	FM	2		Switching/Regulate	•		2	•	2			IP20	X 108, Z 62	N	•	
PD-C 360i/8 FM DUO DALI (white, similar to RAL 9010)	EP10428784	360°	Ø 8 m	RM	2		Switching/Regulate	•		2	•	2			IP20	X 108, Z 98	N	•	★
PD-C 360i/8 DUO DALI WIELAND GSTI8 (white, similar to RAL 9010)	EP10427824	360°	Ø 8 m	RM	2		Switching/Regulate	•		2	•	2			IP20	X 108, Z 62	N	•	
PD-C 360i/8 DUO DALI WAGO WINSTA CodeB (white, similar to RAL 9010)	EP10424649	360°	Ø 8 m	RM	2		Switching/Regulate	•		2	•				IP20	X 108, Z 99	N	•	
PD-C 360i/8 DUO DALI WAGO WINSTA CodeI (white, similar to RAL 9010)	EP10424847	360°	Ø 8 m	RM	2		Switching/Regulate	•		2	•				IP20	X 108, Z 99	N	•	
PD-C 360i/8 DUO DALI WAGO WINSTA CodeA/I (white, similar to RAL 9010)	EP10424663	360°	Ø 8 m	RM	2		Switching/Regulate	•		2	•				IP20	X 108, Z 99	N	•	
PD-C 360i/24 DUO DALI (white, similar to RAL 9010)	EP10427459	360°	Ø 24 m	FM	2		Switching/Regulate	•		2	•	2			IP20	X 108, Z 70	N	•	
PD-C 360i/24 FM DUO DALI (white, similar to RAL 9010)	EP10428791	360°	Ø 24 m	RM	2		Switching/Regulate	•		2	•	2			IP20	X 108, Z 106	N	•	★
PD-C 360i/24 DUO DALI WIELAND GSTI8 (white, similar to RAL 9010)	EP10427374	360°	Ø 24 m	RM	2		Switching/Regulate	•		2	•	2			IP20	X 108, Z 70	N	•	
PD-C 360i/24 DUO DALI WAGO WINSTA CodeB (white, similar to RAL 9010)	EP10424656	360°	Ø 24 m	RM	2		Switching/Regulate	•		2	•				IP20	X 108, Z 107	N	•	
PD-C 360i/24 DUO DALI WAGO WINSTA CodeI (white, similar to RAL 9010)	EP10424854	360°	Ø 24 m	RM	2		Switching/Regulate	•		2	•				IP20	X 108, Z 107	N	•	
PD-C 360i/24 DUO DALI WAGO WINSTA CodeA/I (white, similar to RAL 9010)	EP10424670	360°	Ø 24 m	RM	2		Switching/Regulate	•		2	•				IP20	X 108, Z 107	N	•	
PD-C 360i/32 DUO DALI (white, similar to RAL 9010)	EP10427787	360°	Ø 32 m	FM	2		Switching/Regulate	•		2	•	2			IP20	X 108, Z 70	N	•	


Presence detectors / Ceiling mounting / DALI-2																			
DALI-2																			
PD-C 360/8 BMS DALI-2 (white, similar to RAL 9010)	EP10428203	360°	Ø 8 m	FM		Send values			2			301, 302, 303, 304			IP20	X 108, Z 62	R	•	★
PD-C 360/8 BMS DALI-2 BK (black, similar to RAL 9005)	EP10428449	360°	Ø 8 m	FM		Send values			2			301, 302, 303, 304			IP20	X 108, Z 62	R	•	★
PD-C 360/8 BMS FM DALI-2 (white, similar to RAL 9010)	EP10428807	360°	Ø 8 m	RM		Send values			2			301, 302, 303, 304			IP20	X 108, Z 98	R	•	★
PD-C 360/8 BMS DALI-2 WINSTA Codel (white, similar to RAL 9010)	EP10428487	360°	Ø 8 m	RM		Send values						301, 302, 303, 304			IP20	X 108, Z 106	R	•	★
PD-C 360bt/8 APC10 PS plus DALI-2 (white, similar to RAL 9010)	EP10428142	360°	Ø 8 m	RM	16	Regulate/Switching	•		4	1		103, 208, 301, 302, 303, 304			IP20	X 108, Z 106	Q	•	
PD-C 360bt/8 APC10 PS plus DALI-2 BK (black, similar to RAL 9005)	EP10428456	360°	Ø 8 m	RM	16	Regulate/Switching	•		4	1		103, 208, 301, 302, 303, 304			IP20	X 108, Z 106	Q	•	★
PD-C 360bt/8 APC10 PS plus DALI-2 WINSTA Codel (white, similar to RAL 9010)	EP10428845	360°	Ø 8 m	RM	16	Switching/Regulate	•			1		103, 208, 301, 302, 303, 304			IP20	X 108, Z 118	Q	•	★
PD-C 360bt/8 APC20 PS plus DALI-2 (white, similar to RAL 9010)	EP10428272	360°	Ø 8 m	RM	16	Regulate/Switching	•		4	1		103, 208, 301, 302, 303, 304			IP20	X 108, Z 118	Q		★
PD-C 360bt/8 APC20 PS plus DALI-2 BK (black, similar to RAL 9005)	EP10428876	360°	Ø 8 m	RM	16	Switching/Regulate	•		4	1		103, 208, 301, 302, 303, 304			IP20	X 108, Z 118	Q	•	★
PD-C 360bt/8 APC20 PS plus DALI-2 WINSTA Codel (white, similar to RAL 9010)	EP10428890	360°	Ø 8 m	RM	16	Switching/Regulate	•			1		103, 208, 301, 302, 303, 304			IP20	X 108, Z 118	Q	•	★
PD-C 360/24 BMS DALI-2 (white, similar to RAL 9010)	EP10428210	360°	Ø 24 m	FM		Send values			2			301, 302, 303, 304			IP20	X 108, Z 70	R	•	★
PD-C 360/24 BMS DALI-2 BK (black, similar to RAL 9005)	EP10428432	360°	Ø 24 m	FM		Send values			2			301, 302, 303, 304			IP20	X 108, Z 70	R	•	★
PD-C 360/24 BMS FM DALI-2 (white, similar to RAL 9010)	EP10428814	360°	Ø 24 m	RM		Send values			2			301, 302, 303, 304			IP20	X 108, Z 106	R	•	★

Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Number of light groups	Function	Constant lighting control	SymbLogic	Push button input lighting	Adjustable switch-off delay time	Number of HVAC-channels	DALI-2 device type	Push button input HVAC	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
PD-C 360/24 BMS DALI-2 WINSTA Codel (white, similar to RAL 9010)	EP10428494	360°	Ø 24 m	RM			Send values						301, 302, 303, 304		IP20	X 108, Z 106	R	•	★
PD-C 360bt/24 APC10 PS plus DALI-2 (white, similar to RAL 9010)	EP10428159	360°	Ø 24 m	RM	16	Regulate/Switching	•			4	1	103, 208, 301, 302, 303, 304		IP20	X 108, Z 106	Q	•		
PD-C 360bt/24 APC10 PS plus DALI-2 WINSTA Codel (white, similar to RAL 9010)	EP10428852	360°	Ø 24 m	RM	16	Switching/Regulate	•				1	103, 208, 301, 302, 303, 304		IP20	X 108, Z 126	Q	•	★	
PD-C 360bt/24 APC20 PS plus DALI-2 (white, similar to RAL 9010)	EP10428111	360°	Ø 24 m	RM	16	Regulate/Switching	•			4	1	103, 208, 301, 302, 303, 304		IP20	X 108, Z 126	Q		★	
PD-C 360bt/24 APC20 PS plus DALI-2 BK (black, similar to RAL 9005)	EP10428883	360°	Ø 24 m	RM	16	Switching/Regulate	•			4	1	103, 208, 301, 302, 303, 304		IP20	X 108, Z 126	Q	•	★	
PD-C 360bt/24 APC20 PS plus DALI-2 WINSTA Codel (white, similar to RAL 9010)	EP10428906	360°	Ø 24 m	RM	16	Switching/Regulate	•				1	103, 208, 301, 302, 303, 304		IP20	X 108, Z 126	Q	•	★	
PD-C 360/32 BMS DALI-2 (white, similar to RAL 9010)	EP10424885	360°	Ø 32 m	FM			Send values			2		301, 302, 303, 304		IP20	X 108, Z 70	R	•	★	
PD-C 360bt/32 APC10 PS plus DALI-2 (white, similar to RAL 9010)	EP10428265	360°	Ø 32 m	RM	16	Regulate/Switching	•			4	1	103, 208, 301, 302, 303, 304		IP20	X 108, Z 126	Q	•	★	
PD-C 360bt/32 APC20 PS plus DALI-2 (white, similar to RAL 9010)	EP10428289	360°	Ø 32 m	RM	16	Regulate/Switching	•			4	1	103, 208, 301, 302, 303, 304		IP20	X 108, Z 126	Q	•	★	


Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Cover					
COMPACT COVER SET 24/32 BK	EP00007491	Cover set for COMPACT series, 24 m/32 m, consists of cover and design ring, black	X 108, Z 19	•	
COMPACT COVER SET 24/32 SR	EP10425431	Cover set for COMPACT series, 24 m/32 m, consists of cover and design ring, silver	X 108, Z 19	•	
COMPACT COVER SET 8 BK	EP00007521	Cover set for COMPACT series, 8 m, consists of cover and design ring, black	X 108, Z 24	•	
COMPACT COVER SET 8 SR	EP10425936	Cover set for COMPACT series, 8 m, consists of cover and design ring, stainless steel appearance, similar to RAL 9006	X 108, Z 24	•	
COVER BER S1 IP20 PWH	EP10427107	Cover for wall detector fits with Berker S.1, IP20, polar white	X 55, Y 55, Z 27	•	
COVER BUJ REF IP20 WH	EP10427145	Cover for wall detector fits with Busch-Jäger Reflex, IP20, white	X 55, Y 55, Z 27	•	
COVER ELK RS/PLUS IP20 WH	EM10055270	Cover for wall detector fits with Elko RS/PLUS, IP20, white	X 56, Y 56, Z 27	•	
COVER GIR S55 IP20 WH	EP10427169	Cover for wall detector fits with Gira Standard 55, IP20, white	X 55, Y 55, Z 27	•	
COVER IP20 AN	EM10055133	Cover for wall detectors from the STANDARD series, IP20, anthracite, similar to RAL 7021	X 87, Y 87, Z 29	•	
COVER IP20 CWH	EM10055126	Cover for wall detectors from the STANDARD series, IP20, white, similar to RAL 1013	X 87, Y 87, Z 29	•	
COVER IP20 SR	EM10055140	Cover for wall detectors from the STANDARD series, IP20, silver	X 87, Y 87, Z 29	•	
COVER IP20 SWH	EM10055119	Cover for wall detectors from the STANDARD series, IP20, white, similar to RAL 9016	X 87, Y 87, Z 29	•	
COVER IP20 WH	EM10055102	Cover for wall detectors from the STANDARD series, IP20, white, similar to RAL 9010	X 87, Y 87, Z 29	•	
COVER IP44 WH	EM10055157	Cover for wall detectors from the STANDARD series, IP44, white	X 87, Y 87, Z 67	•	
Electrical accessories					
ACTUATOR FULL AUTO C3 DALI	EP10427473	Modul for the conversion of bus commands from the DALI presence detector and other light controls into switching signals (fully automatic)	X 45, Y 45, Z 24	•	
ACTUATOR SEMI AUTO C4 DALI	EP10427480	Modul for the conversion of bus commands from the DALI presence detector and other light controls into switching signals (semi-automatic)	X 45, Y 45, Z 24	•	
FILTER 230 V	EP10426988	Filter for suppression of inductive loads, such as relays, contactors, fluorescent lamps and transformers	X 62, Y 26, Z 10	•	
ACTUATOR 1x 8A DALI-2	EP10427398	DALI-2 ACTUATOR with integrated relay contact for DALI 2 commands according to IEC 62386-208 (DALI device type 7, DT7)	X 59, Y 33, Z 15	•	★
REPEATER PS DALI-2	EP10429996	Universal DALI 2 signal amplifier (repeater) with integrated bus voltage supply (150 mA) to extend the DALI cable length.	X 170, Y 59, Z 29	•	★
Mounting					
COMPACT APC MOUNTING BOX IP20 SM BK	EP10426285	Surface-mounted box IP20 for COMPACT APC DALI-2	X 103, Z 90	•	
COMPACT APC MOUNTING BOX IP20 SM WH	EP10426278	Surface-mounted box IP20 for COMPACT APC DALI-2	X 103, Z 90	•	
COMPACT APC MOUNTING BOX IP54 SM BK	EP10427190	Surface-mounted box IP54 for COMPACT APC DALI-2	X 130, Y 130, Z 98,7		★

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
COMPACT APC MOUNTING BOX IP54 SM GY	EP10427183	Surface-mounted box IP54 for COMPACT APC DALI-2	X 130, Y 130, Z 98,7	•	★
COMPACT MOUNTING BOX IP20 SM BK	EP10426933	Surface-mounted box for COMPACT series, IP20, black	X 104, Z 30	•	
COMPACT MOUNTING BOX IP20 SM SR	EP10425387	Surface-mounted box for COMPACT series, IP20, silver	X 104, Z 30	•	
COMPACT MOUNTING BOX IP20 SM WH	EP10425370	Surface-mounted box for COMPACT series, IP20, white	X 104, Z 30	•	
COMPACT MOUNTING BOX IP54 SM BK	EP10426940	Surface-mounted box for COMPACT series, IP54, black	X 104, Z 30	•	
COMPACT MOUNTING BOX IP54 SM SR	EP10425912	Surface-mounted box for COMPACT series, IP54, silver	X 104, Z 30	•	
COMPACT MOUNTING BOX IP54 SM WH	EP10425905	Surface-mounted box for COMPACT series, IP54, white	X 104, Z 30	•	
MOUNTING BOX IP44 SM WH	EM10055164	Surface-mounted box for wall detectors from the STANDARD series, IP44, white	X 87, Y 87, Z 49	•	
MOUNTING SET IP20 FM 62 WH	EP10425929	Recessed ceiling mounting set includes installation bracket and dust-protected box, 62 mm	X 63, Z 62	•	
Protection					
BASKET GUARD ROUND LARGE	EM10425608	Basket guard for presence and motion detectors and smoke detectors, Ø 180 mm, height 90 mm	X 180, Z 90	•	
BASKET GUARD ROUND SMALL	EM10425615	Basket guard for presence and motion detectors and smoke detectors, Ø 165 mm, height 70 mm	X 165, Z 70	•	
Push button					
PUSH BUTTON x2 DALI-2 WH	EP10431609	2-way button for DALI-2	X 71, Y 71, Z 21,5	•	★
PUSH BUTTON x4 DALI-2 WH	EP10431616	4-way button for DALI-2	X 71, Y 71, Z 21,5	•	★
PUSH BUTTON x6 DALI-2 WH	EP10431623	6-way button for DALI-2	X 71, Y 71, Z 21,5	•	★
PUSH BUTTON x8 DALI-2 WH	EP10431630	8-way button for DALI-2	X 71, Y 71, Z 21,5	•	★
Remote control					
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•	
REMOTE CONTROL MDi/PDi	EM10425509	IR remote control for presence detectors and motion detectors	X 100, Y 50, Z 9	•	
REMOTE CONTROL PDi DALI	EP10425899	IR remote control for DALI presence detectors and motion detectors	X 100, Y 50, Z 9	•	
REMOTE CONTROL PDi/USER	EM10425547	IR remote control for end users of presence detectors	X 100, Y 50, Z 9	•	
REMOTE CONTROL PDi/plus	EM10425530	IR remote control for multi-channel presence detectors of the COMPACT series (DIM, DUOplus, DUO DIM, DUO DIMplus)	X 100, Y 50, Z 9	•	
REMOTE CONTROL USER	EM10016011	IR remote control for end users	X 56, Y 29, Z 7	•	

A




Standard with optional control via a closing button and parallel wiring of max. ten devices.




Standard operation with automatic stairwell light and optional control via a closing button.

B

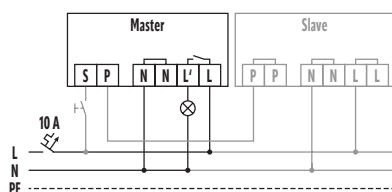


Standard operation with optional control via a closing button and use of max. ten slave devices to one master device.

C

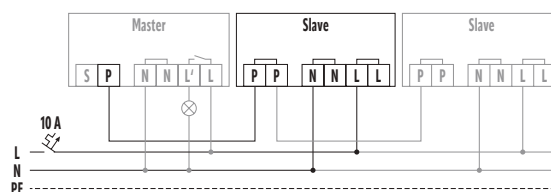


Master/slave connection for presence detectors: a maximum of 10 slave devices may be connected to one master.

CU




Standard operation with optional control via a closing button.

D

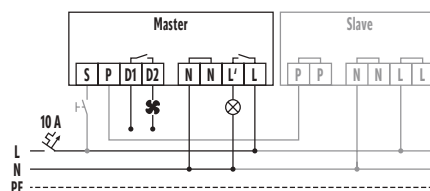


Standard operation with optional control via a closing button and use of max. ten slave devices to one master device.

DB

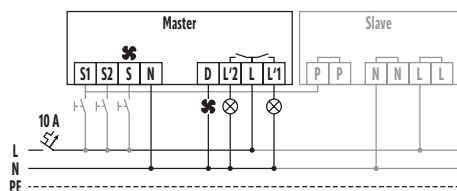


Standard operation.

E

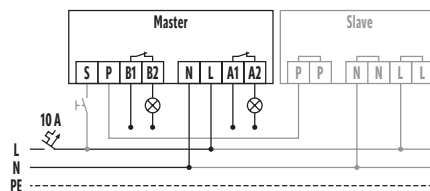


Standard operation with optional control via a closing button and use of max. ten slave devices to one master device.

F

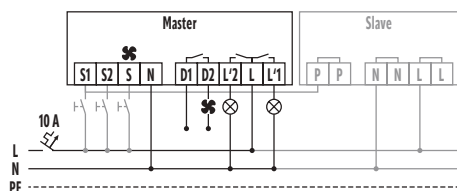


Standard operation with optional control via a closing button and use of max. ten slave devices to one master device.

G

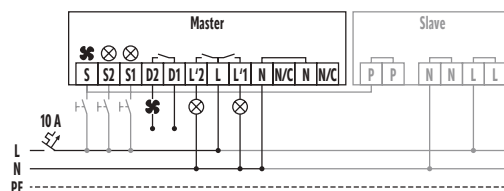


Standard operation with optional control via a closing button and use of max. ten slave devices to one master device.

H

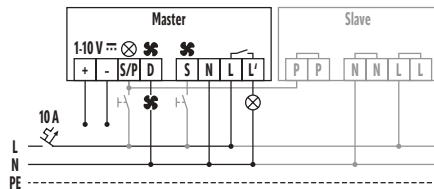


Standard operation with optional control via a closing button and use of max. ten slave devices to one master device.

M




Standard operation with optional control via a closing button.

N

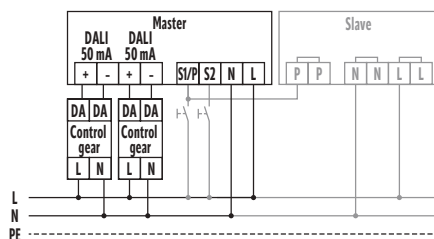


Standard operation with optional control via a closing button and use of max. ten slave devices to one master device.

O




Standard operation.

P




Standard operation.

Q

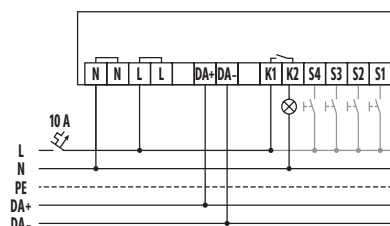

Standard operation with optional control via a closing button.

R



Standard operation with optional control via a closing button. Maximum line length from button to presence detector: 30 m.



- Particularly small design for unobtrusive operation

5 YEARS
MANUFACTURER
WARRANTY



When it is really important not to mar the aesthetic design of a room with technical elements, the mini presence and motion detectors are the perfect solution. Their tiny housings and extremely low installation heights mean that they retreat unobtrusively into the background, while nevertheless keeping a close eye on everything thanks to their high-quality sensor technology. They are available for all common operating technologies and consistently impress clients due to the ease of use.

ESY
CONTROL



Parameterisable with ESY-Pen and ESY-App. More on pages 220 - 221 and at: esylux.com/esy-pen.

COMPACT MINI

QUALITY SENSOR SYSTEM IN THE SMALLEST FORMAT

On-demand lighting switching (230 V, 12 – 36 V) or presence- and daylight-dependent constant light control (DALI, DALI-2, KNX)

Ultra-compact design with diameters of just 25 mm (Ø 6-m detection range) to 58 mm (Ø 12-m detection range)

Numerous variants: range, presence/motion, lighting and HVAC control

Control of LED lights via high-performance relay with tungsten pre-contact (230 V)

Switching delay prevents switching errors due to short-term change in brightness

Manual override and stairwell light function on detectors with push button input

Orientation light function on detectors with DALI or KNX




Smart factory settings for immediate commissioning on remotely controlled variants

Convenient adjustment using remote control with blue mode technology, e.g. fully/semi-automatic systems, light values, switch-off delay times and button functions


Simple parameterisation, remote control and documentation of remotely controlled variants via ESY-Pen and ESY-App



PRODUCT TYPES



FIELD OF DETECTION



DETECTION RANGE

	Ceiling 6 m	Ceiling 8 m	Ceiling 12 m
■ Diagonally (A)	Ø 6 m	Ø 8 m	Ø 12 m
■ Frontal (B)	Ø 3 m	Ø 5 m	Ø 6 m
■ Presence area (C)	Ø 2 m	Ø 3 m	Ø 4 m

Note: Technical data for specific products can be found at www.esylux.com.

COMPACT MINI

INDOOR AUTOMATION / PRESENCE AND MOTION DETECTORS




- On-demand lighting switching (230 V, 12 – 36 V) or presence- and daylight-dependent constant light control (DALI, DALI-2, KNX)
- Ultra-compact design with diameters of just 25 mm (Ø 6-m detection range) to 58 mm (Ø 12-m detection range)
- Numerous variants: range, presence/motion, lighting and HVAC control
- Control of LED lights via high-performance relay with tungsten pre-contact (230 V)
- Switching delay prevents switching errors due to short-term change in brightness
- Manual override and stairwell light function on detectors with push button input
- Orientation light function on detectors with DALI or KNX
- Smart factory settings for immediate commissioning on remotely controlled variants
- Convenient adjustment using remote control with blue mode technology, e.g. fully/semi-automatic systems, light values, switch-off delay times and button functions
- Simple parameterisation, remote control and documentation of remotely controlled variants via ESY-Pen and ESY-App

* With additional DALI actuator ACTUATOR C3/C4 DALI as accessory.


Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Function	Constant lighting control	Push button input lighting	In-rush current	Adjustable switch-off delay time	Number of HVAC-channels	Push button input HVAC	Slave input	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Motion detectors / Ceiling mounting / ON/OFF																		
ON/OFF																		
MD-C 360i/6 mini (opal matt)	EP10425851	360°	Ø 6 m	RM	1	Switching			30 A / 20 ms	•				IP65	X 25, Z 47	AW	•	
MD-C 360i/6 mini 12V (opal matt)	EP10425776	360°	Ø 6 m	RM	1	Switching								IP65	X 25, Z 47	AA	•	
MD-C 360i/8 mini (opal matt)	EP10426001	360°	Ø 8 m	RM	1	Switching		1	800 A / 200 µs	•				IP55	X 33, Z 60	AC	•	
MD-C 360i/8 mini 3m (opal matt)	EP10427008	360°	Ø 8 m	RM	1	Switching		1	800 A / 200 µs	•				IP55	X 33, Z 60	AC	•	
MD-C 360i/12 mini (opal matt)	EP10426018	360°	Ø 12 m	RM	1	Switching		1	800 A / 200 µs	•				IP55	X 58, Z 70	AC	•	
Presence detectors / Ceiling mounting / 12 - 36 V UC																		
12 - 36 V UC																		
PD-C 360i/8 mini UC (opal matt)	EP10427343	360°	Ø 8 m	RM	1	Switching/Send values	•	1		•				IP55	X 33, Z 60	AH	•	
Presence detectors / Ceiling mounting / KNX																		
KNX																		
PD-C 360i/8 mini KNX (opal matt)	EP10426155	360°	Ø 8 m	RM	2	Switching/Regulate	•	1		•	1		•	IP55	X 33, Z 60	O	•	
PD-C 360i/8 mini KNX BK (opal matt)	EP10426209	360°	Ø 8 m	RM	2	Switching/Regulate	•	1		•	1		•	IP55	X 33, Z 60	O	•	★
PD-C 360i/12 mini KNX (opal matt)	EP10426162	360°	Ø 12 m	RM	2	Switching/Regulate	•	1		•	1		•	IP55	X 58, Z 70	O	•	
Presence detectors / Ceiling mounting / ON/OFF																		
ON/OFF																		
PD-C 360i/6 mini (opal matt)	EP10425868	360°	Ø 6 m	RM	1	Switching			30 A / 20 ms	•				IP65	X 25, Z 47	AB	•	
PD-C 360i/8 mini Slave (opal matt)	EP10426063	360°	Ø 8 m	RM		Send values								IP55	X 33, Z 60	AE	•	
PD-C 360i/8 mini (opal matt)	EP10426025	360°	Ø 8 m	RM	1	Switching		1	800 A / 200 µs	•			•	IP55	X 33, Z 60	AD	•	
PD-C 360i/8 mini 3m (opal matt)	EP10427015	360°	Ø 8 m	RM	1	Switching		1	800 A / 200 µs	•			•	IP55	X 33, Z 60	AD	•	
PD-C 360i/12 mini (opal matt)	EP10426032	360°	Ø 12 m	RM	1	Switching		1	800 A / 200 µs	•			•	IP55	X 58, Z 70	AD	•	

Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Number of light groups	Function	Constant lighting control	SymbiLogic	Push button input lighting	Adjustable switch-off delay time	Number of HVAC-channels	DALI-2 device type	Push button input HVAC	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Presence detectors / Ceiling mounting / DALI																			
DALI																			
PD-C 360i/8 mini DALI (opal matt)	EP10427510	360°	Ø 8 m	RM	1		Switching/Regulate	•			•	2			IP54	X 33, Z 60	AF	•	
Presence detectors / Ceiling mounting / DALI-2																			
DALI-2																			
PD-C 360/8 mini BMS DALI-2 (opal matt)	EP10423048	360°	Ø 8 m	RM			Send values						303, 304		IP55	X 33, Z 60	AG	•	★
PD-C 360/8 mini BMS DALI-2 BK (black, opal matt)	EP10423246	360°	Ø 8 m	RM			Send values						303, 304		IP55	X 33, Z 60	AG	•	★


Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Adapter					
COMPACT MINI SPOTLIGHT ADAPTER 51/20	EP10426384	Adapter for COMPACT MINI (6 m) series for installing motion and presence detectors in spotlights (illuminant size QR-CBC51-Ø 51 mm) with retaining ring	X 51, Z 3	•	
COMPACT MINI SPOTLIGHT ADAPTER 51/25	EP10426391	Adapter for COMPACT MINI (8 m and 12 m) series for installing motion and presence detectors in spotlights (illuminant size QR-CBC51-Ø 51 mm) with retaining ring	X 51, Z 3	•	
Electrical accessories					
ACTUATOR FULL AUTO C3 DALI	EP10427473	Modul for the conversion of bus commands from the DALI presence detector and other light controls into switching signals (fully automatic)	X 45, Y 45, Z 24	•	
ACTUATOR SEMI AUTO C4 DALI	EP10427480	Modul for the conversion of bus commands from the DALI presence detector and other light controls into switching signals (semi-automatic)	X 45, Y 45, Z 24	•	
FILTER 230 V	EP10426988	Filter for suppression of inductive loads, such as relays, contactors, fluorescent lamps and transformers	X 62, Y 26, Z 10	•	
POWER SUPPLY 200mA DALI	EC10430008	200mA power pack for supplying power to DALI operating units or DALI control modules that do not have their own power supply	X 48, Y 45, Z 25	•	
Push button					
PUSH BUTTON x2 DALI-2 WH	EP10431609	2-way button for DALI-2	X 71, Y 71, Z 21,5	•	★
PUSH BUTTON x4 DALI-2 WH	EP10431616	4-way button for DALI-2	X 71, Y 71, Z 21,5	•	★
PUSH BUTTON x6 DALI-2 WH	EP10431623	6-way button for DALI-2	X 71, Y 71, Z 21,5	•	★
PUSH BUTTON x8 DALI-2 WH	EP10431630	8-way button for DALI-2	X 71, Y 71, Z 21,5	•	★
Remote control					
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•	
REMOTE CONTROL MDi/PDi	EM10425509	IR remote control for presence detectors and motion detectors	X 100, Y 50, Z 9	•	
REMOTE CONTROL PDi DALI	EP10425899	IR remote control for DALI presence detectors and motion detectors	X 100, Y 50, Z 9	•	
REMOTE CONTROL PDi/USER	EM10425547	IR remote control for end users of presence detectors	X 100, Y 50, Z 9	•	
TELESCOPE MAGNET	EC10430022	Telescope magnet		•	

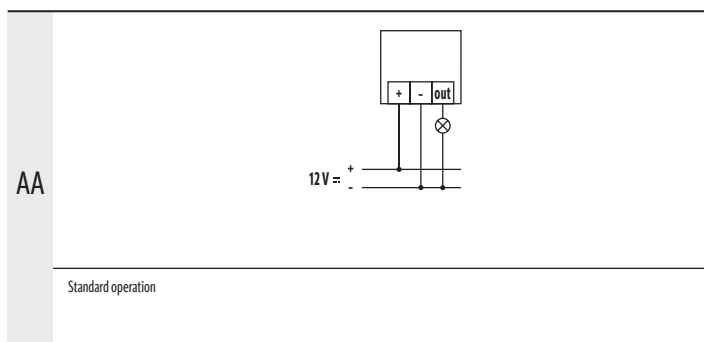

AC




Standard with optional control via a closing button and parallel wiring of max. ten devices.




Standard operation with automatic stairwell light and optional control via a closing button.

AD




Standard operation with optional control via a closing button and use of max. ten slave devices to one master device.

AE




Master/slave connection for presence detectors: a maximum of 10 slave devices may be connected to one master.

AF




Standard operation.




Master/slave connection for presence detectors: a maximum of 8 slave devices may be connected to one master.

AG

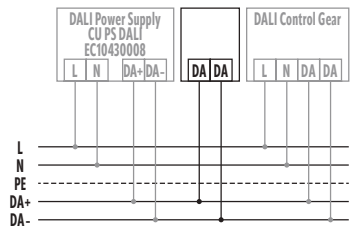


Standard operation.

AH




Standard operation with optional control via a closing button.


AW




Standard operation with optional parallel wiring of max. eight motion detectors.



An RC filter (A) may be required when connecting inductors (e.g. relays, contactors, ballasts).




Standard operation with automatic stairwell light.




Standard operation with the additional possibility of switching on by hand.

AB




Standard operation.



Standard operation with the additional possibility of switching on by hand.

O



Standard operation.

- One-piece housing for easy installation in suspended ceilings
- Discreet appearance due to flush ceiling installation
- Variants with pre-assembled connection cables for WAGO WINSTA® and Wieland GST18® are available

5 YEARS
MANUFACTURER
WARRANTY



The presence and motion detectors in the CE series intelligently switch the lighting and impress with their clever design. The concept enables flush ceiling installation and guarantees a correspondingly subtle appearance that, for the most part, only leaves the lens visible. Installation is quick and easy — even express.



Parameterisable with ESY-Pen and ESY-App. More on pages 220 – 221 and at: esylux.com/esy-pen.

COMPACT EXPRESS

SPECIAL DESIGN FOR SYSTEM CEILINGS

One-piece housing for fast installation flush to the ceiling in suspended ceilings

Demand-driven lighting switching

Convenient adjustment using remote control (for example fully/semi-automatic, light values or switch-off delay times)

Suitable for controlling LED lights using high-performance relays with tungsten pre-contacts (230 V)



Switching delay prevents switching errors due to temporary variations in brightness, such as those caused by weather conditions

Manual override


Variants available with pre-assembled connection cables for WAGO WINSTA[®] and Wieland GST18[®]



PRODUCT TYPES



FIELD OF DETECTION



DETECTION RANGE

	Ceiling 8 m	Ceiling 24 m
■ Diagonally (A)	Ø 8 m	Ø 24 m
■ Frontal (B)	Ø 6 m	Ø 11 m
■ Presence area (C)	Ø 4 m	Ø 8 m

Note: Technical data for specific products can be found at www.esylux.com.

COMPACT EXPRESS


INDOOR AUTOMATION / PRESENCE AND MOTION DETECTORS




- One-piece housing for fast installation flush to the ceiling in suspended ceilings
- Demand-driven lighting switching
- Convenient adjustment using remote control (for example fully/semi-automatic, light values or switch-off delay times)
- Suitable for controlling LED lights using high-performance relays with tungsten pre-contacts (230 V)
- Switching delay prevents switching errors due to temporary variations in brightness, such as those caused by weather conditions
- Manual override
- Variants available with pre-assembled connection cables for WAGO WINSTA® and Wieland GST18®

Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Function	Constant lighting control	Push button input lighting	In-rush current	Adjustable switch-off delay time	Number of HVAC-channels	Push button input HVAC	Slave input	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Motion detectors / Ceiling mounting / ON/OFF																		
ON/OFF																		
MD-CE 360i/8 (opal matt)	EP10510007	360°	Ø 8 m	RM	1	Switching		1	800 A / 200 µs	•				IP40	X 82, Z 24	AI	•	
MD-CE 360i/8 WIELAND GST18 (opal matt)	EP10510014	360°	Ø 8 m	RM	1	Switching		1	800 A / 200 µs	•				IP40	X 82, Z 24	AI	•	
MD-CE 360i/8 WAGO WINSTA (opal matt)	EP10510045	360°	Ø 8 m	RM	1	Switching		1	800 A / 200 µs	•				IP40	X 82, Z 24	AI	•	
MD-CE 360i/24 (opal matt)	EP10510021	360°	Ø 24 m	RM	1	Switching		1	800 A / 200 µs	•				IP40	X 82, Z 32	AI	•	
MD-CE 360i/24 WIELAND GST18 (opal matt)	EP10510038	360°	Ø 24 m	RM	1	Switching		1	800 A / 200 µs	•				IP40	X 82, Z 32	AI	•	
MD-CE 360i/24 WAGO WINSTA (opal matt)	EP10510052	360°	Ø 24 m	RM	1	Switching		1	800 A / 200 µs	•				IP40	X 82, Z 32	AI		
Presence detectors / Ceiling mounting / ON/OFF																		
ON/OFF																		
PD-CE 360/8 Slave (opal matt)	EP10510748	360°	Ø 8 m	RM		Send values							•	IP40	X 82, Z 24	AK	•	
PD-CE 360i/8 (opal matt)	EP10510700	360°	Ø 8 m	RM	1	Switching		1	800 A / 200 µs	•			•	IP40	X 82, Z 24	AJ	•	
PD-CE 360i/8 WIELAND GST18 (opal matt)	EP10510717	360°	Ø 8 m	RM	1	Switching		1	800 A / 200 µs	•			•	IP40	X 82, Z 24	AJ	•	
PD-CE 360i/8 WAGO WINSTA (opal matt)	EP10510786	360°	Ø 8 m	RM	1	Switching		1	800 A / 200 µs	•			•	IP40	X 82, Z 24	AJ	•	
PD-CE 360/24 Slave (opal matt)	EP10510755	360°	Ø 24 m	RM		Send values							•	IP40	X 82, Z 32	AK	•	
PD-CE 360i/24 (opal matt)	EP10510724	360°	Ø 24 m	RM	1	Switching		1	800 A / 200 µs	•			•	IP40	X 82, Z 32	AJ	•	
PD-CE 360i/24 WIELAND GST18 (opal matt)	EP10510731	360°	Ø 24 m	RM	1	Switching		1	800 A / 200 µs	•			•	IP40	X 82, Z 32	AJ	•	
PD-CE 360i/24 WAGO WINSTA (opal matt)	EP10510793	360°	Ø 24 m	RM	1	Switching		1	800 A / 200 µs	•			•	IP40	X 82, Z 32	AJ	•	


Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Electrical accessories					
FILTER 230 V	EP10426988	Filter for suppression of inductive loads, such as relays, contactors, fluorescent lamps and transformers	X 62, Y 26, Z 10	•	
Protection					
BASKET GUARD ROUND SMALL	EM10425615	Basket guard for presence and motion detectors and smoke detectors, Ø 165 mm, height 70 mm	X 165, Z 70	•	
BASKET GUARD ROUND LARGE	EM10425608	Basket guard for presence and motion detectors and smoke detectors, Ø 180 mm, height 90 mm	X 180, Z 90	•	
Remote control					
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•	
REMOTE CONTROL MDi/PDi	EM10425509	IR remote control for presence detectors and motion detectors	X 100, Y 50, Z 9	•	
REMOTE CONTROL USER	EM10016011	IR remote control for end users	X 56, Y 29, Z 7	•	

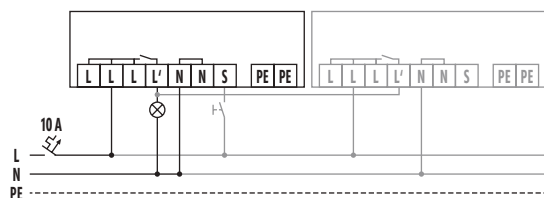


Standard with optional control via a closing button and parallel wiring of max. ten devices.

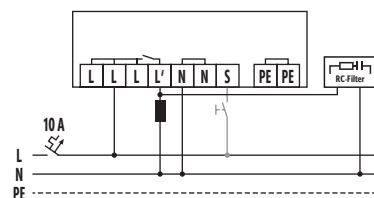


When connecting inductors (e.g. relays, contactors, ballasts) the use of a filter (A) may be necessary.

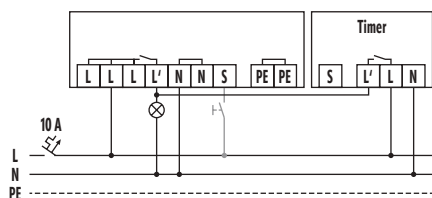

Standard operation with automatic stairwell light and optional control via a closing button.

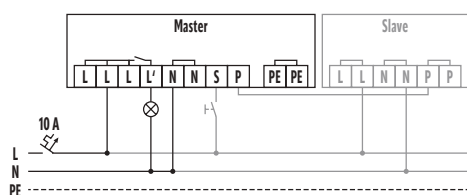

Standard operation with optional control via a closing button and use of max. ten slave devices to one master device.

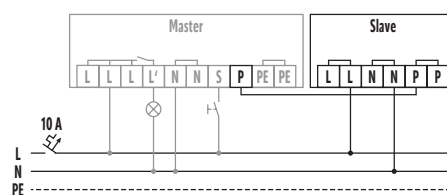

Master/slave connection for presence detectors: a maximum of 10 slave devices may be connected to one master.

- Stylish design with flat body
- Small junction box provides a large wiring space in every flush-mounted socket

5 YEARS
MANUFACTURER
WARRANTY



Whether in an exclusive lounge or a prestigious board office — many locations feature elegant interior décor which demands equally attractive room technology. The perfect task for the FLAT presence and motion detectors: With their flat design, they have a particularly unobtrusive appearance, while a range of variants offers the perfect solution for every taste.



Parameterisable with ESY-Pen and ESY-App. More on pages 220 – 221 and at: esylux.com/esy-pen.

FLAT

QUALITY SENSOR SYSTEM IN AN ELEGANT DESIGN

Elegant design with a flat body (6 mm) and low installation depth (24 mm)

Covers with glass surfaces are available

Demand-driven lighting switching (230 V) or automatic light control (DALI or KNX) at a constant brightness level depending on presence and daylight (constant light control)

Instantly ready for use thanks to pre-installed factory settings (230 V, DALI)

Automatic configuration of light ballasts (DALI broadcast)

Simple configuration using remote control

Extensive individual configuration options for 47 communication objects (KNX)

Optimised to control LED lights whilst protecting the relay through zero-cross switching (230 V)

Small junction box provides a large wiring area in every flush-mounted socket

PRODUCT TYPES

--	--	--

FIELD OF DETECTION	DETECTION RANGE	
		Ceiling 8 m
	■ Diagonally (A)	Ø 8 m
	■ Frontal (B)	Ø 6 m
	■ Presence area (C)	Ø 4 m

Note: Technical data for specific products can be found at www.esylux.com.



- Elegant design with a flat body (6 mm) and low installation depth (24 mm)
- Covers with glass surfaces are available
- Demand-driven lighting switching (230 V) or automatic light control (DALI or KNX) at a constant brightness level depending on presence and daylight (constant light control)
- Instantly ready for use thanks to pre-installed factory settings (230 V, DALI)
- Automatic configuration of light ballasts (DALI broadcast)
- Simple configuration using remote control
- Extensive individual configuration options for 47 communication objects (KNX)
- Optimised to control LED lights whilst protecting the relay through zero-cross switching (230 V)
- Small junction box provides a large wiring area in every flush-mounted socket

* With additional DALI actuator ACTUATOR C3/C4 DALI as accessory.

Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Function	Constant lighting control	Push button input lighting	In-rush current	Adjustable switch-off delay time	Number of HVAC-channels	Push button input HVAC	Slave input	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Motion detectors / Ceiling mounting / ON/OFF																		
ON/OFF																		
MD-FLAT 360i/8 ROUND BLACK (black, similar to RAL 9004)	EP10428074	360°	Ø 8 m	FM	1	Switching		1	78 A / 5 ms	•				IP20	X 94, Z 30	S	•	
MD-FLAT 360i/8 ROUND WHITE (white, similar to RAL 9010)	EP10427886	360°	Ø 8 m	FM	1	Switching		1	78 A / 5 ms	•				IP20	X 94, Z 30	S	•	
MD-FLAT 360i/8 SQUARE BLACK (black, similar to RAL 9004)	EP10428081	360°	Ø 8 m	FM	1	Switching		1	78 A / 5 ms	•				IP20	X 77, Y 77, Z 30	S	•	
MD-FLAT 360i/8 SQUARE WHITE (white, similar to RAL 9010)	EP10427893	360°	Ø 8 m	FM	1	Switching		1	78 A / 5 ms	•				IP20	X 77, Y 77, Z 30	S	•	
MD-FLAT 360i/8 LARGE ROUND WHITE (white, similar to RAL 9010)	EP10428609	360°	Ø 8 m	FM	1	Switching		1	78 A / 5 ms	•				IP20	X 104, Z 30	S	•	
MD-FLAT-E 360i/8 ROUND WHITE (white, similar to RAL 9010)	EP10428548	360°	Ø 8 m	RM	1	Switching		1	78 A / 5 ms	•				IP20	X 94, Z 76	S	•	
MD-FLAT 360i/8 LARGE ROUND BK (black, similar to RAL 9004)	EP10428746	360°	Ø 8 m	FM	1	Switching		1	78 A / 5 µs	•				IP20	X 104, Z 30		•	★
MD-FLAT-E 360i/8 RW WIELAND GST18 (white, similar to RAL 9010)	EP10427862	360°	Ø 8 m	RM	1	Switching		1	78 A / 5 ms	•				IP20	X 94, Z 76,5	S	•	
MD-FLAT 360i/8 RW WAGO WINSTA CodeA (white, similar to RAL 9010)	EP10424861	360°	Ø 8 m	RM	1	Switching		1	78 A / 5 ms	•				IP20	X 94, Z 76,5	S	•	
Presence detectors / Ceiling mounting / KNX																		
KNX																		
PD-FLAT 360i/8 ROUND BLACK KNX (black, similar to RAL 9004)	EP10451768	360°	Ø 8 m	FM	2	Switching/Regulate	•	2		•	1	•	•	IP20	X 94, Z 30	O	•	
PD-FLAT 360i/8 ROUND WHITE KNX (white, similar to RAL 9010)	EP10451706	360°	Ø 8 m	FM	2	Switching/Regulate	•	2		•	1	•	•	IP20	X 94, Z 30	O	•	
PD-FLAT 360i/8 SQUARE BLACK KNX (black, similar to RAL 9004)	EP10451775	360°	Ø 8 m	FM	2	Switching/Regulate	•	2		•	1	•	•	IP20	X 77, Y 77, Z 30	O	•	
PD-FLAT 360i/8 SQUARE WHITE KNX (white, similar to RAL 9010)	EP10451713	360°	Ø 8 m	FM	2	Switching/Regulate	•	2		•	1	•	•	IP20	X 77, Y 77, Z 30	O	•	
PD-FLAT 360i/8 ROUND WHITE FM KNX (white, similar to RAL 9010)	EP10423222	360°	Ø 8 m	RM	2	Switching/Regulate	•	1	78 A / 5 µs	•	1	•	•	IP20	X 94, Z 76	O	•	★
PD-FLAT 360i/8 LARGE ROUND WHITE KNX (white, similar to RAL 9010)	EP10428685	360°	Ø 8 m	FM	2	Switching/Regulate	•	2		•	1	•	•	IP20	X 104, Z 76	O	•	
PD-FLAT 360i/8 LARGE ROUND WHITE FM KNX (white, similar to RAL 9010)	EP10423239	360°	Ø 8 m	RM	2	Switching/Regulate	•	1	78 A / 5 µs	•	1	•	•	IP20	X 104, Z 76	O	•	★
Presence detectors / Ceiling mounting / ON/OFF																		
ON/OFF																		
PD-FLAT 360i/8 ROUND BLACK (black, similar to RAL 9004)	EP10427954	360°	Ø 8 m	FM	1	Switching		1	78 A / 5 ms	•				IP20	X 94, Z 30	T	•	
PD-FLAT 360i/8 ROUND WHITE (white, similar to RAL 9010)	EP10427930	360°	Ø 8 m	FM	1	Switching		1	78 A / 5 ms	•				IP20	X 94, Z 30	T	•	

Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Function	Constant lighting control	Push button input lighting	In-rush current	Adjustable switch-off delay time	Number of HVAC-channels	Push button input HVAC	Slave input	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
PD-FLAT 360i/8 SQUARE BLACK (black, similar to RAL 9004)	EP10427947	360°	Ø 8 m	FM	1	Switching		1	78 A / 5 ms	•				IP20	X 77, Y 77, Z 30	T	•	
PD-FLAT 360i/8 SQUARE WHITE (white, similar to RAL 9010)	EP10427923	360°	Ø 8 m	FM	1	Switching		1	78 A / 5 ms	•				IP20	X 77, Y 77, Z 30	T	•	
PD-FLAT 360i/8 LARGE ROUND WHITE (white, similar to RAL 9010)	EP10428623	360°	Ø 8 m	FM	1	Switching		1	78 A / 5 ms	•				IP20	X 104, Z 30	T	•	
PD-FLAT-E 360i/8 ROUND WHITE (white, similar to RAL 9010)	EP10428555	360°	Ø 8 m	RM	1	Switching		1	78 A / 5 ms	•				IP20	X 94, Z 76	T	•	
PD-FLAT 360i/8 LARGE ROUND BK (black, similar to RAL 9004)	EP10428753	360°	Ø 8 m	FM	1	Switching		1	78 A / 5 µs	•	1			IP20	X 104, Z 30	T	•	★
PD-FLAT-E 360i/8 RW WIELAND GST18 (white, similar to RAL 9010)	EP10427879	360°	Ø 8 m	RM	1	Switching		1	78 A / 5 ms	•				IP20	X 94, Z 76,5	T	•	
PD-FLAT 360i/8 RW WAGO WINSTA CodeA (white, similar to RAL 9010)	EP10424878	360°	Ø 8 m	RM	1	Switching		1	78 A / 5 ms	•				IP20	X 94, Z 76,5	T	•	

Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Number of light groups	Function	Constant lighting control	SymbiLogic	Push button input lighting	Adjustable switch-off delay time	Number of HVAC-channels	DALI-2 device type	Push button input HVAC	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
----------------------------	----------	-----------------	-----------------	-------------------	--------------------------	------------------------	----------	---------------------------	------------	----------------------------	----------------------------------	-------------------------	--------------------	------------------------	-----------------	-----------------	-----------------	----------------	-------------

Presence detectors / Ceiling mounting / DALI

DALI

PD-FLAT 360i/8 ROUND BLACK DALI (black, similar to RAL 9004)	EP10427916	360°	Ø 8 m	FM	1	Switching/Regulate	•		1	•	2			IP20	X 94, Z 30	U	•	
PD-FLAT 360i/8 ROUND WHITE DALI (white, similar to RAL 9010)	EP10427541	360°	Ø 8 m	FM	1	Switching/Regulate	•		1	•	2			IP20	X 94, Z 30	U	•	
PD-FLAT 360i/8 SQUARE WHITE DALI (white, similar to RAL 9010)	EP10427558	360°	Ø 8 m	FM	1	Switching/Regulate	•		1	•	2			IP20	X 77, Y 77, Z 30	U	•	
PD-FLAT 360i/8 ROUND WHITE DALI SET (white, similar to RAL 9010)	EP10428708	360°	Ø 8 m	FM	1	Switching/Regulate	•		1	•	2			IP20	X 94, Z 30	U	•	
PD-FLAT 360i/8 SQUARE WHITE DALI SET (white, similar to RAL 9010)	EP10428715	360°	Ø 8 m	FM	1	Switching/Regulate	•		1	•	2			IP20	X 77, Y 77, Z 30	U	•	
PD-FLAT 360i/8 LARGE ROUND WHITE DALI SET (white, similar to RAL 9010)	EP10428661	360°	Ø 8 m	FM	1	Switching/Regulate	•		1	•	2			IP20	X 104, Z 30	U	•	



Presence detectors / Ceiling mounting / DALI-2

DALI-2


PD-FLAT 360/8 RW BMS DALI-2 (white, similar to RAL 9010)	EP10423031	360°	Ø 8 m	FM		Send values			1			301, 302, 303, 304		IP20	X 94, Z 30	Z	•	★
PD-FLAT 360/8 SW BMS DALI-2 (white, similar to RAL 9010)	EP10423024	360°	Ø 8 m	FM		Send values			1			301, 302, 303, 304		IP20	X 77, Y 77, Z 30	Z	•	★
PD-FLAT 360/8 ROUND WHITE BMS FM DALI-2 (white, similar to RAL 9010)	EP10423208	360°	Ø 8 m	RM		Send values			1			301, 302, 303, 304		IP20	X 94, Z 76	Z	•	★
PD-FLAT-L 360/8 RW BMS DALI-2 (white, similar to RAL 9010)	EP10423055	360°	Ø 8 m	FM		Send values			1			301, 302, 303, 304		IP20	X 104, Z 30	Z	•	★
PD-FLAT 360/8 LARGE ROUND WHITE BMS FM DALI-2 (white, similar to RAL 9010)	EP10423215	360°	Ø 8 m	RM		Send values			1			301, 302, 303, 304		IP20	X 104, Z 76	Z	•	★
PD-FLAT 360/8 RW BMS DALI-2 WINSTA CodeI (white, similar to RAL 9010)	EP10428869	360°	Ø 8 m	RM		Send values			1			301, 302, 303, 304		IP20	X 94, Z 76	Z	•	★

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Cover					
FLAT COVER GLASS ROUND BK	EP00007293	Cover for FLAT series, glass, round, black	X 94, Z 5	•	
FLAT COVER GLASS ROUND GY	EP00007323	Cover for FLAT series, glass, round, grey	X 94, Z 5	•	
FLAT COVER GLASS ROUND WH	EP00007255	Cover for FLAT series, glass, round, white	X 94, Z 5	•	
FLAT COVER GLASS SQUARE BK	EP00007309	Cover for FLAT series, glass, square, grey	X 77, Y 77, Z 5	•	
FLAT COVER GLASS SQUARE WH	EP00007262	Cover for FLAT series, glass, square, white	X 77, Y 77, Z 5	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
FLAT COVER LARGE ROUND BK	EP10428098	Cover for FLAT series, Ø 104 mm, round, black	X 104, Z 5	•	
FLAT COVER LARGE ROUND WH	EP10428579	Cover for FLAT series, Ø 104 mm, round, white	X 104, Z 5	•	
FLAT COVER ROUND BK	EP00007279	Cover for FLAT series, round, black	X 94, Z 5	•	
FLAT COVER ROUND WH	EP00007231	Cover for FLAT series, round, white	X 94, Z 5	•	
FLAT COVER SQUARE BK	EP00007286	Cover for FLAT series, square, black	X 77, Y 77, Z 5	•	
FLAT COVER SQUARE WH	EP00007248	Cover for FLAT series, square, white	X 77, Y 77, Z 5	•	
Electrical accessories					
ACTUATOR FULL AUTO C3 DALI	EP10427473	Modul for the conversion of bus commands from the DALI presence detector and other light controls into switching signals (fully automatic)	X 45, Y 45, Z 24	•	
ACTUATOR SEMI AUTO C4 DALI	EP10427480	Modul for the conversion of bus commands from the DALI presence detector and other light controls into switching signals (semi-automatic)	X 45, Y 45, Z 24	•	
FILTER 230 V	EP10426988	Filter for suppression of inductive loads, such as relays, contactors, fluorescent lamps and transformers	X 62, Y 26, Z 10	•	
POWER SUPPLY 200mA DALI	EC10430008	200mA power pack for supplying power to DALI operating units or DALI control modules that do not have their own power supply	X 48, Y 45, Z 25	•	
Mounting					
COMPACT APC MOUNTING BOX IP20 SM BK	EP10426285	Surface-mounted box IP20 for COMPACT APC DALI-2	X 103, Z 90	•	
COMPACT MOUNTING BOX IP20 SM BK	EP10426933	Surface-mounted box for COMPACT series, IP20, black	X 104, Z 30	•	
COMPACT MOUNTING BOX IP20 SM WH	EP10425370	Surface-mounted box for COMPACT series, IP20, white	X 104, Z 30	•	
FLAT MOUNTING SET IP20 FM	EP10426889	Recessed ceiling mounting set for FLAT series includes installation bracket and dust-protected box	X 63, Z 61	•	
Protection					
BASKET GUARD ROUND LARGE	EM10425608	Basket guard for presence and motion detectors and smoke detectors, Ø 180 mm, height 90 mm	X 180, Z 90	•	
BASKET GUARD ROUND SMALL	EM10425615	Basket guard for presence and motion detectors and smoke detectors, Ø 165 mm, height 70 mm	X 165, Z 70	•	
Push button					
PUSH BUTTON x2 DALI-2 WH	EP10431609	2-way button for DALI-2	X 71, Y 71, Z 21,5	•	★
PUSH BUTTON x4 DALI-2 WH	EP10431616	4-way button for DALI-2	X 71, Y 71, Z 21,5	•	★
PUSH BUTTON x6 DALI-2 WH	EP10431623	6-way button for DALI-2	X 71, Y 71, Z 21,5	•	★
PUSH BUTTON x8 DALI-2 WH	EP10431630	8-way button for DALI-2	X 71, Y 71, Z 21,5	•	★
Remote control					
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•	
REMOTE CONTROL MDi/PDi	EM10425509	IR remote control for presence detectors and motion detectors	X 100, Y 50, Z 9	•	
REMOTE CONTROL PDi DALI	EP10425899	IR remote control for DALI presence detectors and motion detectors	X 100, Y 50, Z 9	•	
REMOTE CONTROL PDi/USER	EM10425547	IR remote control for end users of presence detectors	X 100, Y 50, Z 9	•	
TELESCOPE MAGNET	EC10430022	Telescope magnet		•	


0		S		
	Standard operation.		Standard operation with optional control via a closing button and parallel wiring of max. 8 devices	

T




Standard operation with optional control via a closing button and parallel wiring of max. 8 devices

U

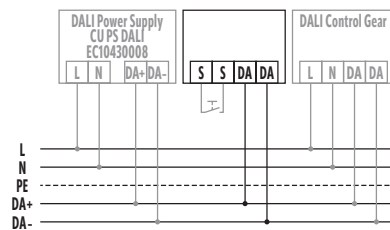

Standard operation with optional control via a closing button.


Z



Standard operation with optional control via a closing button.

- Smallest design with a flat lens

5 YEARS
MANUFACTURER
WARRANTY

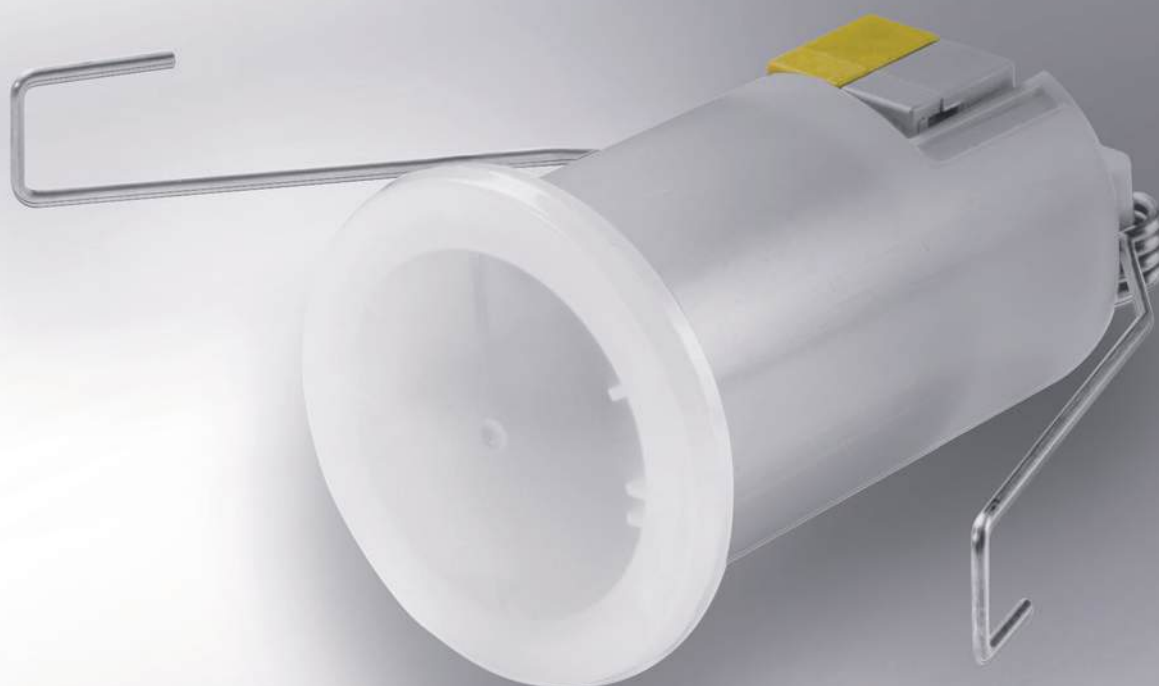

The FLAT mini sensors have arguably the most unobtrusive design for an intelligent sensor and are therefore a suitable alternative for rooms where the technology should remain in the background as discreetly as possible. Their tiny housings mean that they retreat unobtrusively into the background, while nevertheless keeping a close eye on everything due to their high-quality sensor technology. At the same time, the particularly simple installation is impressive: Using a spring clamp or locking ring and, if required, through simple integration into brand switches.



Parameterisable with ESY-Pen and ESY-App. More on pages 220 - 221 and at: esylux.com/esy-pen.

FLAT MINI SAVES ENERGY WITHOUT BEING NOTICED

Particularly unobtrusive with a flat lens, an installation height of only 3 mm and a diameter of 33 mm

Automatic DALI light control at a constant brightness level, depending on presence and daylight (constant light control)

Immediately ready for use thanks to pre-installed factory settings

Automatic configuration of light ballasts (DALI Broadcast)


Simple programming using remote control

Manual override with DALI push buttons possible


Can be combined with additional FLAT mini detectors to expand the presence detection (master/slave)


Reduction in light output after expiration of the switch-off delay time to provide an orientation light in hallways and passageways; with integrated switch-off warning

Option to extend with DALI switch from ESYLUX for presence-dependent HVAC control



PRODUCT TYPES



FIELD OF DETECTION	DETECTION RANGE	
		Ceiling 6 m
	■ Diagonally (A)	Ø 6 m
	■ Frontal (B)	-
	■ Presence area (C)	Ø 2,5 m

Note: Technical data for specific products can be found at www.esylux.com.

FLAT MINI

INDOOR AUTOMATION / PRESENCE AND MOTION DETECTORS




- Particularly unobtrusive with a flat lens, an installation height of only 3 mm and a diameter of 33 mm
- Automatic DALI light control at a constant brightness level, depending on presence and daylight (constant light control)
- Immediately ready for use thanks to pre-installed factory settings
- Automatic configuration of light ballasts (DALI Broadcast)
- Simple programming using remote control
- Manual override with DALI push buttons possible
- Can be combined with additional FLAT mini detectors to expand the presence detection (master/slave)
- Reduction in light output after expiration of the switch-off delay time to provide an orientation light in hallways and passageways; with integrated switch-off warning
- Option to extend with DALI switch from ESYLUX for presence-dependent HVAC control


* With additional DALI actuator ACTUATOR C3/C4 DALI as accessory.

Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Number of light groups	Function	Constant lighting control	SymbiLogic	Push button input lighting	Adjustable switch-off delay time	Number of HVAC-channels	DALI-2 device type	Push button input HVAC	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Presence detectors / Ceiling mounting / DALI																			
DALI																			
PD-FLAT 360i/6 mini DALI (opal matt)	EP10427503	360°	Ø 6 m	RM	1		Switching/Regulate	•			•	2			IP55	X 33, Z 48	AF	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Electrical accessories					
ACTUATOR FULL AUTO C3 DALI	EP10427473	Modul for the conversion of bus commands from the DALI presence detector and other light controls into switching signals (fully automatic)	X 45, Y 45, Z 24	•	
ACTUATOR SEMI AUTO C4 DALI	EP10427480	Modul for the conversion of bus commands from the DALI presence detector and other light controls into switching signals (semi-automatic)	X 45, Y 45, Z 24	•	
POWER SUPPLY 200mA DALI	EC10430008	200mA power pack for supplying power to DALI operating units or DALI control modules that do not have their own power supply	X 48, Y 45, Z 25	•	
Remote control					
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•	
REMOTE CONTROL PDi DALI	EP10425899	IR remote control for DALI presence detectors and motion detectors	X 100, Y 50, Z 9	•	
REMOTE CONTROL PDi/USER	EM10425547	IR remote control for end users of presence detectors	X 100, Y 50, Z 9	•	



Standard operation.



Master/slave connection for presence detectors: a maximum of 8 slave devices may be connected to one master.

- Proven technology and simple installation
- Suitable for controlling LED lights

3 YEARS
MANUFACTURER
WARRANTY



The tried-and-tested technology in the Standard series is suitable for many different applications in buildings. Multiple variants of the presence and motion detector enable flexible application due to the different fields of detection, installation types and further details.



Parameterisable with ESY-Pen and ESY-App. More on pages 220 – 221 and at: esylux.com/esy-pen.

STANDARD

FIELD-TESTED AND FUTURE-PROOF

Two-part housing with sensor head and power box for quick and easy installation

Variants for recessed ceiling mounting and flush mounting; surface mounting with accessories

Demand-driven light switching

Setting options using remote control ("I" versions) or adjustment control, e.g. fully automatic/semi-automatic, light values, switch-off delay times and button functions

Optimised for the control of LED lights via high-performance relay with tungsten pre-contact (230 V)

Manual override with staircase lighting function for detectors with push button input






Push terminals with through-wiring option



Large wiring space due to low overall height of the power box

Wall-mounted variants compatible with common brands of switch series for a harmonious look

PRODUCT TYPES



FIELD OF DETECTION



DETECTION RANGE

	Ceiling 8 m	Ceiling 24 m	Wall 16 m
■ Diagonally (A)	Ø 8 m	Ø 24 m	Ø 16 m
■ Frontal (B)	Ø 4 m	Ø 8 m	Ø 6 m
■ Presence area (C)	Ø 3 m	Ø 6 m	Ø 4 m

Note: Technical data for specific products can be found at www.esylux.com.




- Two-part housing with sensor head and power box for quick and easy installation
- Variants for recessed ceiling mounting and flush mounting; surface mounting with accessories
- Demand-driven light switching
- Setting options using remote control ("I" versions) or adjustment control, e.g. fully automatic/semi-automatic, light values, switch-off delay times and button functions
- Optimised for the control of LED lights via high-performance relay with tungsten pre-contact (230 V)
- Manual override with staircase lighting function for detectors with push button input
- Push terminals with through-wiring option
- Large wiring space due to low overall height of the power box
- Wall-mounted variants compatible with common brands of switch series for a harmonious look


Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Function	Constant lighting control	Push button input lighting	In-rush current	Adjustable switch-off delay time	Number of HVAC-channels	Push button input HVAC	Slave input	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Motion detectors / Ceiling mounting / ON/OFF																		
ON/OFF																		
MD 360/8 (white, similar to RAL 9010)	EM10055324	360°	Ø 8 m	FM	1	Switching			100 A / 200 ms	•				IP20	X 140, Z 63	AM	•	
MD 360i/24 (white, similar to RAL 9010)	EM10055300	360°	Ø 24 m	FM	1	Switching		1	450 A / 200 µs	•				IP20	X 140, Z 75	AL	•	
Motion detectors / Wall mounting / ON/OFF																		
ON/OFF																		
MD 180i/R (opal matt)	EM10055010	180°	Ø 16 m	FM	1	Switching		1	800 A / 200 µs	•			•	IP20	X 70, Y 70, Z 55	AN	•	
Presence detectors / Ceiling mounting / ON/OFF																		
ON/OFF																		
PD 360/8 Slave (white, similar to RAL 9010)	EM10425028	360°	Ø 8 m	FM		Send values								IP20	X 140, Z 63	AP	•	
PD 360i/8 (white, similar to RAL 9010)	EM10425004	360°	Ø 8 m	FM	1	Switching		1	800 A / 200 µs	•	1		•	IP20	X 140, Z 63	AO	•	
PD 360/24 Slave (white, similar to RAL 9010)	EM10425127	360°	Ø 24 m	FM		Send values								IP20	X 140, Z 75	AP	•	
PD 360i/24 (white, similar to RAL 9010)	EM10425103	360°	Ø 24 m	FM	1	Switching		1	800 A / 200 µs	•	1		•	IP20	X 140, Z 75	AO	•	
Presence detectors / Wall mounting / ON/OFF																		
ON/OFF																		
MD/PD 180 Slave (opal matt)	EM10410024	180°	Ø 16 m	FM		Send values								IP20	X 70, Y 70, Z 55	AS	•	
PD 180i/R (opal matt)	EM10410017	180°	Ø 16 m	FM	1	Switching		1	800 A / 200 µs	•	1		•	IP20	X 70, Y 70, Z 55	AR	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio New product
Accessories				
Cover				
COVER BER MOD2 IP20 WH	EP10427138	Cover for wall detector fits with Berker module 2, IP20, white	X 55, Y 55, Z 27	•
COVER BER S1 IP20 PWH	EP10427107	Cover for wall detector fits with Berker S.1, IP20, polar white	X 55, Y 55, Z 27	•
COVER BUJ REF IP20 WH	EP10427145	Cover for wall detector fits with Busch-Jäger Reflex, IP20, white	X 55, Y 55, Z 27	•
COVER ELK RS/PLUS IP20 WH	EM10055270	Cover for wall detector fits with Elko RS/PLUS, IP20, white	X 56, Y 56, Z 27	•
COVER GIR S55 IP20 WH	EP10427169	Cover for wall detector fits with Gira Standard 55, IP20, white	X 55, Y 55, Z 27	•
COVER IP20 AN	EM10055133	Cover for wall detectors from the STANDARD series, IP20, anthracite, similar to RAL 7021	X 87, Y 87, Z 29	•
COVER IP20 CWH	EM10055126	Cover for wall detectors from the STANDARD series, IP20, white, similar to RAL 1013	X 87, Y 87, Z 29	•
COVER IP20 SR	EM10055140	Cover for wall detectors from the STANDARD series, IP20, silver	X 87, Y 87, Z 29	•
COVER IP20 SWH	EM10055119	Cover for wall detectors from the STANDARD series, IP20, white, similar to RAL 9016	X 87, Y 87, Z 29	•
COVER IP20 WH	EM10055102	Cover for wall detectors from the STANDARD series, IP20, white, similar to RAL 9010	X 87, Y 87, Z 29	•
COVER IP44 WH	EM10055157	Cover for wall detectors from the STANDARD series, IP44, white	X 87, Y 87, Z 67	•
STANDARD COVER SET 8M WH	EM10425455	Cover set for STANDARD series, 8 m	X 140, Z 30	•
Electrical accessories				
FILTER 230 V	EP10426988	Filter for suppression of inductive loads, such as relays, contactors, fluorescent lamps and transformers	X 62, Y 26, Z 10	•
Mounting				
MOUNTING BOX IP44 SM WH	EM10055164	Surface-mounted box for wall detectors from the STANDARD series, IP44, white	X 87, Y 87, Z 49	•
STANDARD MOUNTING BOX IP54 SM WH	EM10425400	Surface-mounted box for the STANDARD series, IP54, white	X 127, Z 21	•
Protection				
BASKET GUARD ROUND LARGE	EM10425608	Basket guard for presence and motion detectors and smoke detectors, Ø180 mm, height 90 mm	X 180, Z 90	•
BASKET GUARD ROUND SMALL	EM10425615	Basket guard for presence and motion detectors and smoke detectors, Ø165 mm, height 70 mm	X 165, Z 70	•
Remote control				
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•
REMOTE CONTROL MDi/PDi	EM10425509	IR remote control for presence detectors and motion detectors	X 100, Y 50, Z 9	•


AL



Standard operation with optional parallel wiring of max. six devices.




When connecting inductors (e.g. relays, contactors, ballasts) the use of a filter (A) may be necessary.




Standard operation with automatic stairwell light.


AM

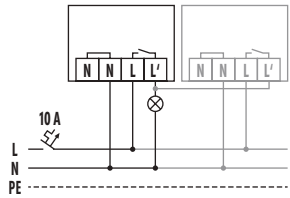

Standard operation with optional parallel wiring of max. six devices.




When connecting inductors (e.g. relays, contactors, ballasts) the use of a filter (A) may be necessary.




Standard operation with automatic stairwell light.

AN

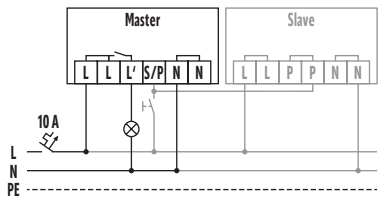


Standard operation with optional control via a closing button, and use of max. six slave devices to one master device.

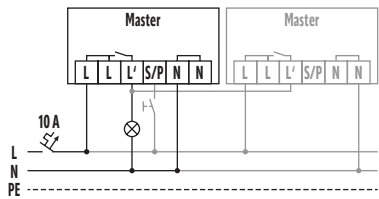


Standard operation with optional control via a closing button and parallel wiring of max. five devices.

AO

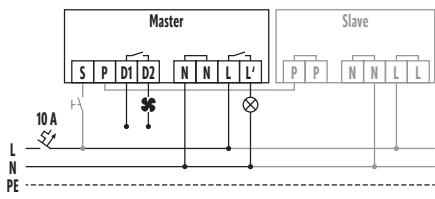


Standard operation with optional control via a closing button, and use of max. six slave devices to one master device.

AP

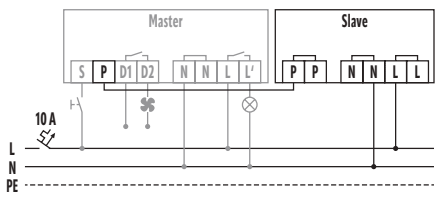


Master/slave connection for presence detectors: a maximum of 6 slave devices may be connected to one master.

AR

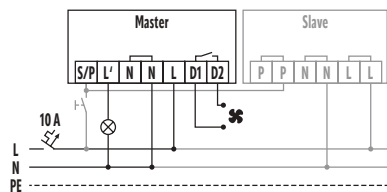

Standard operation with optional control via a closing button, and use of max. six slave devices to one master device.

AS

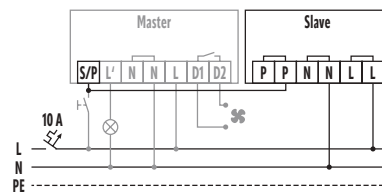

Master/slave connection for presence detectors: a maximum of 6 slave devices may be connected to one master.

- Optimised for controlling LED lights
- High-quality technology at an entry-level price

5 YEARS
MANUFACTURER
WARRANTY



The BASIC presence and motion detectors offer a simply entry route into demand-driven building automation for intelligent light control. They are particularly suitable for cost-sensitive projects or areas of the building where simple functionality is sufficient — and due to the high-quality PIR and light sensors from ESYLUX still provide quality, energy efficiency and comfort.



Parameterisable with ESY-Pen and ESY-App. More on pages 220 – 221 and at: esylux.com/esy-pen.

BASIC

FULL ENERGY EFFICIENCY ON A SMALL BUDGET

Demand-driven lighting switching

Control of LED lights with zero-cross switching (ceiling detector) or tungsten pre-contact (wall detector)

Adjustment options via remote control ("i" versions) or adjustment control, e.g. fully automatic system/semi-automatic system, light values, switch-off delay times or button functions

Switching delay prevents switching errors due to short-term change in brightness

Manual override with stairwell light function on detectors with push button input

Wide range of installation options (ceiling, surface-mounted box, wall mounting)






Covers and frame for wall detector available as an accessory



Compatible with conventional brand switch systems for a uniform design

Simple parameterisation, remote control and documentation of remotely controlled variants via ESY-Pen and ESY-App

PRODUCT TYPES



FIELD OF DETECTION



DETECTION RANGE

	Ceiling 8 m	Ceiling 24 m	Wall 16 m
■ Diagonally (A)	Ø 8 m	Ø 24 m	Ø 16 m
■ Frontal (B)	Ø 6 m	Ø 11 m	Ø 12 m
■ Presence area (C)	Ø 4 m	Ø 8 m	-

Note: Technical data for specific products can be found at www.esylux.com.









- Demand-driven lighting switching
- Control of LED lights with zero-cross switching (ceiling detector) or tungsten pre-contact (wall detector)
- Adjustment options via remote control ("I" versions) or adjustment control, e.g. fully automatic system/semi-automatic system, light values, switch-off delay times or button functions
- Switching delay prevents switching errors due to short-term change in brightness
- Manual override with stairwell light function on detectors with push button input
- Wide range of installation options (ceiling, surface-mounted box, wall mounting)
- Covers and frame for wall detector available as an accessory
- Compatible with conventional brand switch systems for a uniform design
- Simple parameterisation, remote control and documentation of remotely controlled variants via ESY-Pen and ESY-App

Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Function	Constant lighting control	Push button input lighting	In-rush current	Adjustable switch-off delay time	Number of HVAC-channels	Push button input HVAC	Slave input	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Motion detectors / Ceiling mounting / ON/OFF																		
ON/OFF																		
MD 360/8 BASIC (white, similar to RAL 9010)	EB10430404	360°	Ø 8 m	SM	1	Switching	1	78 A / 5 ms	•					IP40	X 101, Z 33	V	•	
MD 360/8 BASIC FM (white, similar to RAL 9010)	EB10431708	360°	Ø 8 m	FM	1	Switching	1	78 A / 5 µs	•					IP40	X 101, Z 93	V	•	★
MD 360/8 BASIC SMB (white, similar to RAL 9010)	EB10430497	360°	Ø 8 m	SM	1	Switching	1	78 A / 5 ms	•					IP40	X 101, Z 50	V	•	
MD 360/8 BASIC IP54 (white, similar to RAL 9010)	EB10431340	360°	Ø 8 m	SM	1	Switching	1	78 A / 5 ms	•					IP54	X 102, Z 51	V	•	★
MD 360i/8 BASIC (white, similar to RAL 9010)	EB10430428	360°	Ø 8 m	SM	1	Switching	1	78 A / 5 ms	•					IP40	X 101, Z 33	V	•	
MD 360i/8 BASIC SMB (white, similar to RAL 9010)	EB10430466	360°	Ø 8 m	SM	1	Switching	1	78 A / 5 ms	•					IP40	X 101, Z 50	V	•	
MD 360i/8 BASIC IP54 (white, similar to RAL 9010)	EB10431319	360°	Ø 8 m	SM	1	Switching	1	78 A / 5 ms	•					IP54	X 102, Z 51	V	•	★
MD 360/24 BASIC (white, similar to RAL 9010)	EB10430848	360°	Ø 24 m	SM	1	Switching	1	78 A / 5 ms	•					IP40	X 101, Z 53	V	•	
MD 360/24 BASIC FM (white, similar to RAL 9010)	EB10431715	360°	Ø 24 m	FM	1	Switching	1	78 A / 5 µs	•					IP40	X 101, Z 113	V	•	★
MD 360/24 BASIC SMB (white, similar to RAL 9010)	EB10430886	360°	Ø 24 m	SM	1	Switching	1	78 A / 5 ms	•					IP40	X 101, Z 73	V	•	
MD 360/24 BASIC IP54 (white, similar to RAL 9010)	EB10431333	360°	Ø 24 m	SM	1	Switching	1	78 A / 5 ms	•					IP54	X 102, Z 71	V	•	
MD 360i/24 BASIC (white, similar to RAL 9010)	EB10430862	360°	Ø 24 m	SM	1	Switching	1	78 A / 5 ms	•					IP40	X 101, Z 53	V	•	
MD 360i/24 BASIC SMB (white, similar to RAL 9010)	EB10430909	360°	Ø 24 m	SM	1	Switching	1	78 A / 5 ms	•					IP40	X 101, Z 73	V	•	
MD 360i/24 BASIC IP54 (white, similar to RAL 9010)	EB10431326	360°	Ø 24 m	SM	1	Switching	1	78 A / 5 ms	•					IP54	X 102, Z 71	V	•	
Motion detectors / Wall mounting / ON/OFF																		
ON/OFF																		
MD 180i/16 BASIC Set EXX (white, similar to RAL 9010)	EB10430633	180°	Ø 16 m	FM	1	Switching	1	800 A / 200 µs	•					IP40	X 70, Y 70, Z 55	X	•	
MD 180i/16 BASIC Set SKK (white, similar to RAL 9010)	EB10430626	180°	Ø 16 m	FM	1	Switching	1	800 A / 200 µs	•					IP40	X 70, Y 70, Z 55	X	•	
MD 180i/16 BASIC (opal matt)	EB10430459	180°	Ø 16 m	FM	1	Switching	1	800 A / 200 µs	•					IP40	X 70, Y 70, Z 53	X	•	
Presence detectors / Ceiling mounting / ELC																		
ELC																		
PD 360i/8 BASIC ELC (white, similar to RAL 9010)	EB10431357	360°	Ø 8 m	SM	4	Switching/Regulate	•			•	2			IP20	X 101, Z 33	Y	•	

Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Function	Constant lighting control	Push button input lighting	In-rush current	Adjustable switch-off delay time	Number of HVAC-channels	Push button input HVAC	Slave input	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Presence detectors / Ceiling mounting / KNX																		
KNX																		
PD 360i/8 KNX BASIC (white, similar to RAL 9010)	EB10430442	360°	Ø 8 m	SM	1	Switching				•		•	IP40	X 101, Z 33		0	•	
PD 360i/8 BASIC FM KNX (white, similar to RAL 9010)	EB10431746	360°	Ø 8 m	RM	1	Switching				•		•	IP40	X 101, Z 93		0	•	★
Presence detectors / Ceiling mounting / ON/OFF																		
ON/OFF																		
PD 360i/8 BASIC SMB (white, similar to RAL 9010)	EB10430473	360°	Ø 8 m	SM	1	Switching		1	78 A / 5 ms	•			IP40	X 101, Z 50		T	•	
PD 360i/8 BASIC IP54 (white, similar to RAL 9010)	EB10431272	360°	Ø 8 m	SM	1	Switching		1	78 A / 5 ms	•			IP54	X 102, Z 51		T	•	★
PD 360i/8 BASIC (white, similar to RAL 9010)	EB10430411	360°	Ø 8 m	SM	1	Switching		1	78 A / 5 ms	•			IP40	X 101, Z 33		T	•	
PD 360i/8 BASIC FM (white, similar to RAL 9010)	EB10431722	360°	Ø 8 m	FM	1	Switching		1	78 A / 5 µs	•			IP40	X 101, Z 93		T	•	★
PD 360i/8 BASIC SMB (white, similar to RAL 9010)	EB10430480	360°	Ø 8 m	SM	1	Switching		1	78 A / 5 ms	•			IP40	X 101, Z 50		T	•	
PD 360i/8 BASIC IP54 (white, similar to RAL 9010)	EB10431302	360°	Ø 8 m	SM	1	Switching		1	78 A / 5 ms	•			IP54	X 102, Z 51		T	•	★
PD 360i/8 BASIC (white, similar to RAL 9010)	EB10430435	360°	Ø 8 m	SM	1	Switching		1	78 A / 5 ms	•			IP40	X 101, Z 33		T	•	
PD 360i/24 BASIC (white, similar to RAL 9010)	EB10430855	360°	Ø 24 m	SM	1	Switching		1	78 A / 5 ms	•			IP40	X 101, Z 53		W	•	
PD 360i/24 BASIC FM (white, similar to RAL 9010)	EB10431739	360°	Ø 24 m	FM	1	Switching		1	78 A / 5 µs	•			IP40	X 101, Z 113		W	•	★
PD 360i/24 BASIC SMB (white, similar to RAL 9010)	EB10430893	360°	Ø 24 m	SM	1	Switching		1	78 A / 5 ms	•			IP40	X 101, Z 73		W	•	
PD 360i/24 BASIC IP54 (white, similar to RAL 9010)	EB10431289	360°	Ø 24 m	SM	1	Switching		1	78 A / 5 ms	•			IP54	X 102, Z 71		W	•	
PD 360i/24 BASIC (white, similar to RAL 9010)	EB10430879	360°	Ø 24 m	SM	1	Switching		1	78 A / 5 ms	•			IP40	X 101, Z 53		W	•	
PD 360i/24 BASIC SMB (white, similar to RAL 9010)	EB10430916	360°	Ø 24 m	SM	1	Switching		1	78 A / 5 ms	•			IP40	X 101, Z 73		W	•	
PD 360i/24 BASIC IP54 (white, similar to RAL 9010)	EB10431296	360°	Ø 24 m	SM	1	Switching		1	78 A / 5 ms	•			IP54	X 102, Z 71		W	•	


Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Accessories					
BASIC MOUNTING BOX IP20 SM WH	EB10423147	Surface-mounted box for BASIC series, IP20, white	X 102, Z 29	•	
Adapter					
BASIC SPACER WH	EB10423130	Spacer for BASIC series, white, compatible with BASIC IP40 variants	X 78,2, Y 27, Z 16	•	
Cover					
BASIC 24 LENS MASK	EB10423109	Lens mask 24/32 m	X 68, Z 25	•	
BASIC 8 LENS MASK	EB10423093	Lens mask 8 m	X 47, Z 7,2	•	
BASIC IP54 24 LENS MASK	EB10423505	Lens mask 24 m IP54	X 60, Z 25	•	
BASIC IP54 8 LENS MASK	EB10423512	Lens mask 8 m IP54	X 40, Z 7	•	
COVER BER MOD2 IP20 WH	EP10427138	Cover for wall detector fits with Berker module 2, IP20, white	X 55, Y 55, Z 27	•	
COVER BER S1 IP20 PWH	EP10427107	Cover for wall detector fits with Berker S.1, IP20, polar white	X 55, Y 55, Z 27	•	
COVER BUJ REF IP20 WH	EP10427145	Cover for wall detector fits with Busch-Jäger Reflex, IP20, white	X 55, Y 55, Z 27	•	
COVER ELK RS/PLUS IP20 WH	EM10055270	Cover for wall detector fits with Elko RS/PLUS, IP20, white	X 56, Y 56, Z 27	•	
COVER GIR S55 IP20 WH	EP10427169	Cover for wall detector fits with Gira Standard 55, IP20, white	X 55, Y 55, Z 27	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
COVER IP20 AN	EM10055133	Cover for wall detectors from the STANDARD series, IP20, anthracite, similar to RAL 7021	X 87, Y 87, Z 29	•	
COVER IP20 CWH	EM10055126	Cover for wall detectors from the STANDARD series, IP20, white, similar to RAL 1013	X 87, Y 87, Z 29	•	
COVER IP20 SR	EM10055140	Cover for wall detectors from the STANDARD series, IP20, silver	X 87, Y 87, Z 29	•	
COVER IP20 SWH	EM10055119	Cover for wall detectors from the STANDARD series, IP20, white, similar to RAL 9016	X 87, Y 87, Z 29	•	
COVER IP20 WH	EM10055102	Cover for wall detectors from the STANDARD series, IP20, white, similar to RAL 9010	X 87, Y 87, Z 29	•	
COVER IP44 WH	EM10055157	Cover for wall detectors from the STANDARD series, IP44, white	X 87, Y 87, Z 67	•	
Electrical accessories					
FILTER 230 V	EP10426988	Filter for suppression of inductive loads, such as relays, contactors, fluorescent lamps and transformers	X 62, Y 26, Z 10	•	
Mounting					
MOUNTING SET IP20 FM 62 WH	EP10425929	Recessed ceiling mounting set includes installation bracket and dust-protected box, 62 mm	X 63, Z 62	•	
Protection					
BASKET GUARD ROUND LARGE	EM10425608	Basket guard for presence and motion detectors and smoke detectors, Ø180 mm, height 90 mm	X 180, Z 90	•	
BASKET GUARD ROUND SMALL	EM10425615	Basket guard for presence and motion detectors and smoke detectors, Ø165 mm, height 70 mm	X 165, Z 70	•	
Remote control					
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•	
REMOTE CONTROL MDi/PDi	EM10425509	IR remote control for presence detectors and motion detectors	X 100, Y 50, Z 9	•	

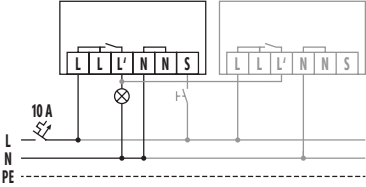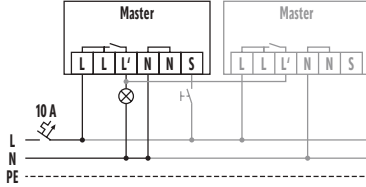O		T		<p>Standard operation.</p>	<p>Standard operation with optional control via a closing button and parallel wiring of max. 8 devices</p>
V		W		<p>Standard with optional control via a closing button and parallel wiring of max. 8 devices.</p>	<p>Standard with optional control via a closing button and parallel wiring of max. six devices.</p>
X		Y		<p>Standard with optional control via a closing button and parallel wiring of max. six devices.</p>	<p>Standard operation.</p>



- **High-quality technology at an entry-level price**
- **Fast recessed ceiling mounting without accessories**
- **Discreet appearance thanks to installation flush to the ceiling**

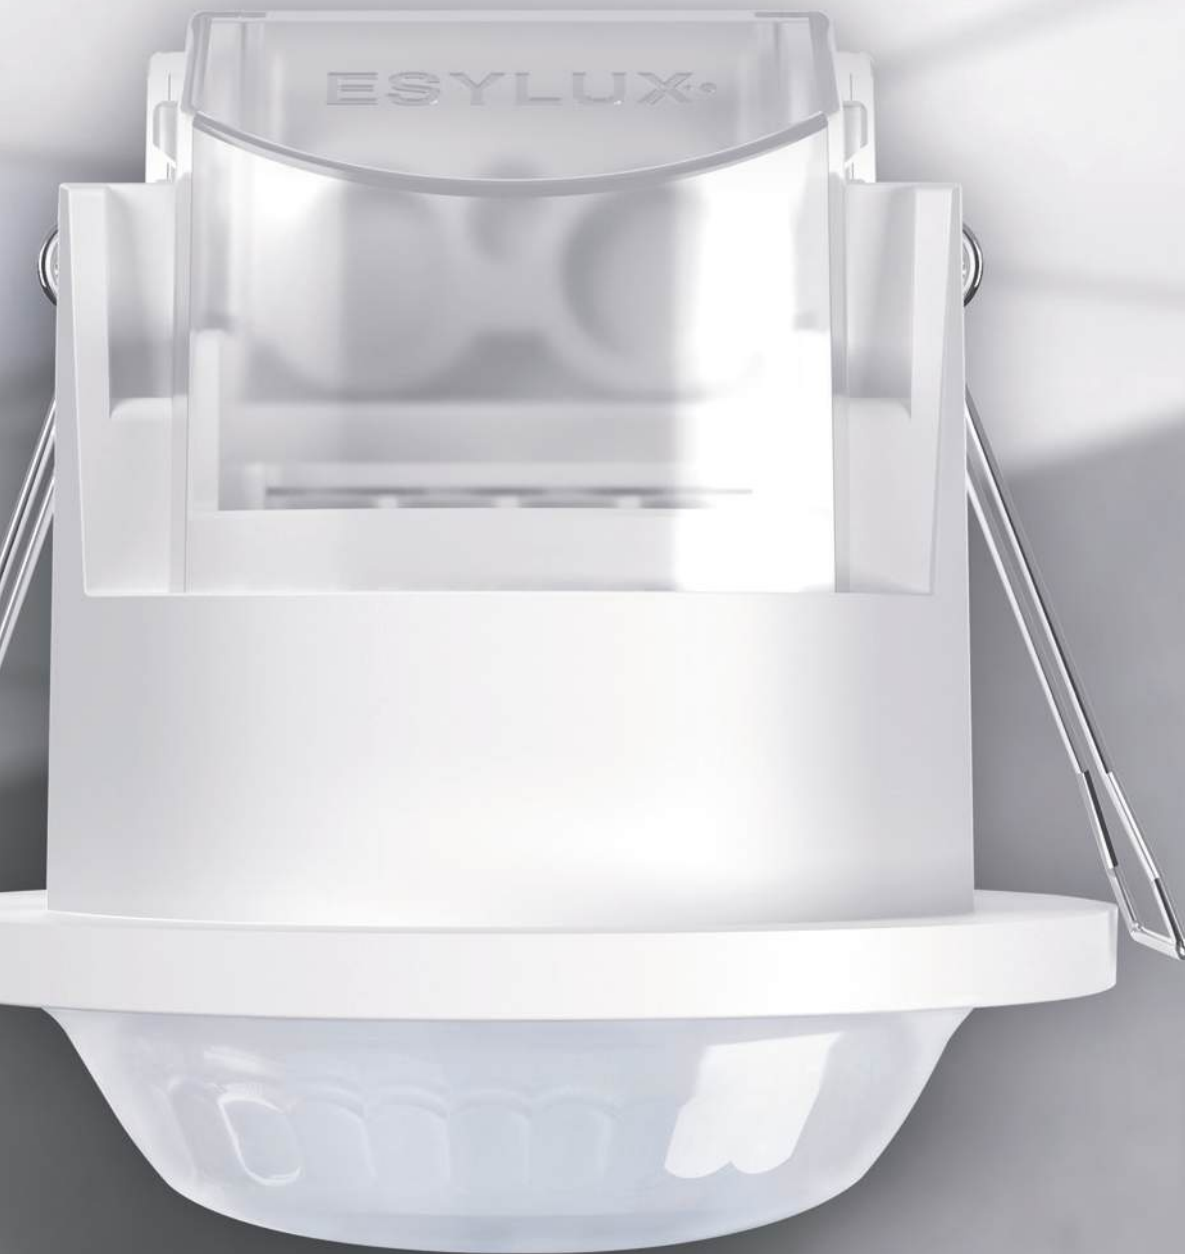

The presence and motion detectors in the BASIC EXPRESS series provide a simple entry point for intelligent, demand-driven light control. Their one-piece housing allows for fast, flush-mounted installation in suspended ceilings. Zero-cross switching means the relay is protected when the LED lighting is switched, improving energy efficiency and convenience even when the budget is limited – or in building areas where simpler functionality is sufficient.

BASIC EXPRESS

SIMPLE ENERGY EFFICIENCY FOR CEILING SYSTEMS

Demand-driven switching of lighting

Flush-mounted installation in suspended ceilings without accessories

Zero-cross switching for LED lighting to protect the relay

Switching delay prevents switching faults caused by temporary changes in brightness

Push button input

Through-wiring with double diaphragm cable entry for cables up to 2.5 mm²


Protection type IP23

Ready for use immediately with factory settings

Easy to configure via remote control or using the ESY-Pen and ESY-App



PRODUCT TYPES



FIELD OF DETECTION	DETECTION RANGE	
		Ceiling 8 m
	■ Diagonally (A)	Ø 8 m
	■ Frontal (B)	Ø 5 m
	■ Presence area (C)	Ø 4 m

Note: Technical data for specific products can be found at www.esylux.com.


BASIC EXPRESS

INDOOR AUTOMATION / PRESENCE AND MOTION DETECTORS



- Demand-driven switching of lighting
- Flush-mounted installation in suspended ceilings without accessories
- Zero-cross switching for LED lighting to protect the relay
- Switching delay prevents switching faults caused by temporary changes in brightness
- Push button input
- Through-wiring with double diaphragm cable entry for cables up to 2.5 mm²
- Protection type IP23
- Ready for use immediately with factory settings
- Easy to configure via remote control or using the ESY-Pen and ESY-App


Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Function	Constant lighting control	Push button input lighting	In-rush current	Adjustable switch-off delay time	Number of HVAC-channels	Push button input HVAC	Slave input	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Motion detectors / Ceiling mounting / ON/OFF																		
ON/OFF																		
BASIC EXPRESS MD 360° 08 IR 1C FM IP23 WH (white, similar to RAL 9010)	EB10431777	360°	Ø 8 m	RM		Switching		1	78 A / 5 µs					IP23	X 79, Z 79	CY	•	★
10x BASIC EXPRESS MD 360° 08 IR 1C FM IP23 WH (white, similar to RAL 9010)	EB10431791	360°	Ø 8 m	RM		Switching		1	78 A / 5 µs					IP23	X 79, Z 79	CY	•	★
Presence detectors / Ceiling mounting / ON/OFF																		
ON/OFF																		
BASIC EXPRESS PD 360° 08 IR 1C FM IP23 WH (white, similar to RAL 9010)	EB10431784	360°	Ø 8 m	RM		Switching	•	1	78 A / 5 µs					IP23	X 79, Z 79	CY	•	★
10x BASIC EXPRESS PD 360° 08 IR 1C FM IP23 WH (white, similar to RAL 9010)	EB10431807	360°	Ø 8 m	RM		Switching	•	1	78 A / 5 µs					IP23	X 79, Z 79	CY	•	★

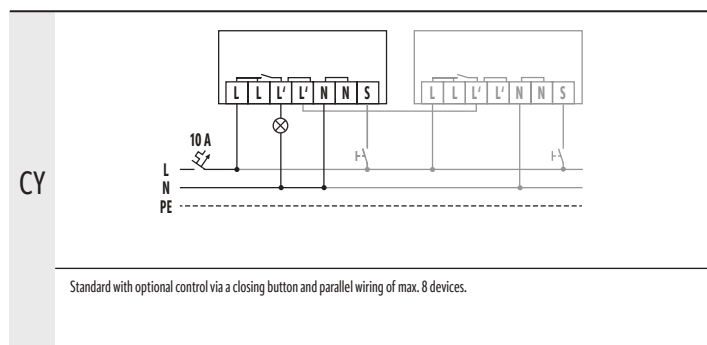



- Smallest design with a flat lens

5 YEARS
MANUFACTURER
WARRANTY

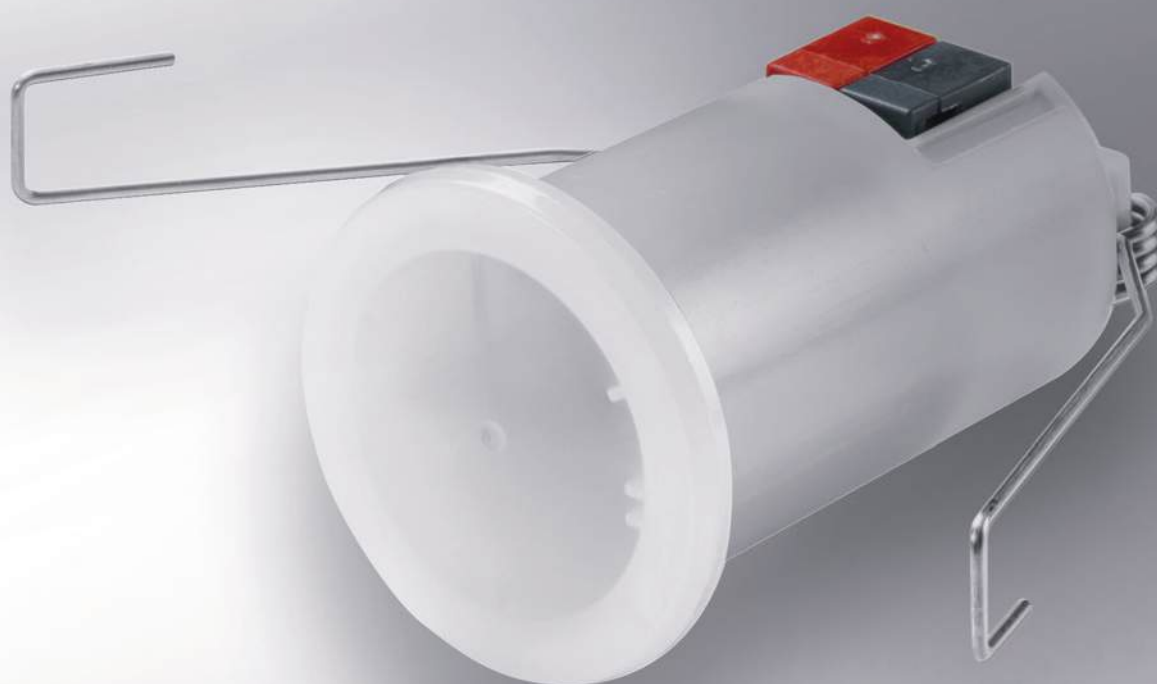

The LS FLAT mini KNX dimmer switch ensures that a better level of individuality, flexibility and energy efficiency can be achieved for any KNX lighting control system. Hidden in a tiny housing, its light measurement can be used to switch, regulate or control two separate light channels. It can align two external light values with its own value, thereby providing almost unlimited possibilities for multi-point measurements and cascading.

FLAT MINI

SAVES ENERGY WITHOUT BEING NOTICED

Switches, controls and regulates up to two separate light channels

Can be combined with presence and motion detectors as well as additional light sensors for optimal control and regulation of large or complex room situations

Extensive measuring range of the internal light sensor of up to 10,000 lux


Flat lens with an installation height of only 3 mm and a diameter of 33 mm

Light channels can be configured extensively

With orientation light and twilight switch function



PRODUCT TYPES




FLAT MINI
INDOOR AUTOMATION / BRIGHTNESS CONTROLLER



- Switches, controls and regulates up to two separate light channels
- Can be combined with presence and motion detectors as well as additional light sensors for optimal control and regulation of large or complex room situations
- Extensive measuring range of the internal light sensor of up to 10,000 lux
- Flat lens with an installation height of only 3 mm and a diameter of 33 mm
- Light channels can be configured extensively
- With orientation light and twilight switch function

Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Function	Constant lighting control	Push button input lighting	In-rush current	Adjustable switch-off delay time	Number of HVAC-channels	Push button input HVAC	Slave input	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Brightness controller / Ceiling mounting / KNX																		
KNX																		
LS FLAT mini KNX (opal matt)	ED10429002			RM	2	Switching/Regulate	•							IP55	X 33, Z 48	0	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Adapter					
COMPACT MINI SPOTLIGHT ADAPTER 51/25	EP10426391	Adapter for COMPACT MINI (8 m and 12 m) series for installing motion and presence detectors in spotlights (illuminant size QR-CBC51-Ø 51 mm) with retaining ring	X 51, Z 3	•	

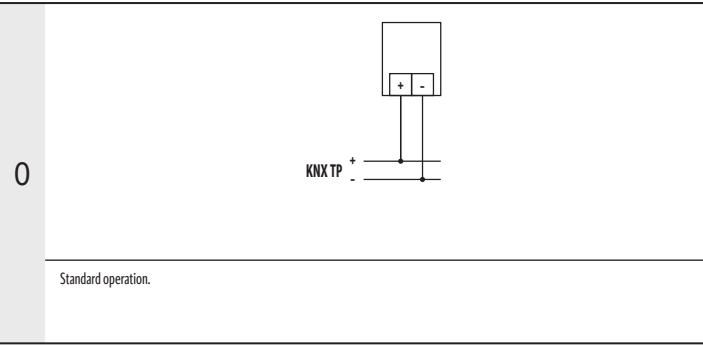



- ELC lights and ELC sensor systems are quick to connect via plug-and-play
- Lights can be grouped, scaled and networked via plug-and-play
- Immediate commissioning without programming

5 YEARS
MANUFACTURER
WARRANTY



The SMARTDRIVER-2 is an integrated control unit for system lights with ESYLUX Light Control (ELC) that enables easy room-by-room modernisation using plug-and-play, without any programming effort. The system lights combine ELC control units, ELC sensor systems, ELC ceiling lights and cabling to implement presence- and daylight-dependent lighting. These system lights also meet the highest standards for energy-efficient human centric lighting with SymbiLogic technology. Lights manufactured by third parties can also be integrated into and controlled by the system.



Parameterisable with ESY-Pen and ESY-App. More on pages 220 – 221 and at: esylux.com/esy-pen.

SMARTDRIVER-2

ROOM-BY-ROOM CONTROL FOR THE BEST TASK LIGHT

ELC control unit with compact, easy-to-install housing for room-by-room modernisation via plug-and-play

Variants for energy-efficient human centric lighting (SymbiLogic) and presence- and daylight- dependent constant light control

Variable current output and adapter for integrating and controlling any other types of light

Quick and easy scaling to different room sizes

Simple grouping via plug connection

Intuitive ESYLUX multifunction button (accessory)

Two inputs for conventional 230-V buttons


Two DALI control outputs for additional DALI lights (includes DT8)

Presence-dependent HVAC switching via a DALI actuator (accessory)

Variants with integrated module for direct integration into KNX building automation (without separate KNX DALI gateway)



PRODUCT TYPES



SMARTDRIVER-2

INDOOR AUTOMATION / CONTROLS



- ELC control unit with compact, easy-to-install housing for room-by-room modernisation via plug-and-play
- Variants for energy-efficient human centric lighting (SymbiLogic) and presence- and daylight- dependent constant light control
- Variable current output and adapter for integrating and controlling any other types of light
- Quick and easy scaling to different room sizes
- Simple grouping via plug connection
- Intuitive ESYLUX multifunction button (accessory)
- Two inputs for conventional 230-V buttons
- Two DALI control outputs for additional DALI lights (includes DT8)
- Presence-dependent HVAC switching via a DALI actuator (accessory)
- Variants with integrated module for direct integration into KNX building automation (without separate KNX DALI gateway)

Product group/product name	Item no.	Number of light channels	Number of outputs luminaires ELC	Number of outputs luminaires DALI	Number of control units per group	Number of HVAC-channels	Orientation light	Constant lighting control	Orientation light duration or time	HCL-lighting control	Push button input lighting	Number of scenes	BT (Bluetooth)	KNX	ELC	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Controls / ELC																			
SMARTDRIVER-2 IR 4C+2 x4 ELC (white)	EC10431401	4	4	2	20	2	10 - 50 %	•	•		2	4			•	X 555, Y 262, Z 85	CK	•	★
SMARTDRIVER-2 IR 4C+2 x4 ELC KNX (white)	EC10431449	4	4	2	20	2	10 - 50 %	•	•		2	4		•	•	X 555, Y 262, Z 85	CL		
SMARTDRIVER-2 IR 4C+2 x8 ELC (white)	EC10431425	4	8	2	10	2	10 - 50 %	•	•		2	4			•	X 555, Y 262, Z 85	CK	•	★
SMARTDRIVER-2 IR 4C+2 x8 ELC KNX (white)	EC10431432	4	8	2	10	2	10 - 50 %	•	•		2	4		•	•	X 555, Y 262, Z 85	CL		
SMARTDRIVER-2 TW IR 2C+2 x4 ELC (white)	EC10431418	2	4	2	10	2	10 - 50 %	•	•	•	2	13			•	X 555, Y 262, Z 85	CK	•	★
SMARTDRIVER-2 TW IR 2C+2 x4 ELC KNX (white)	EC10431470	2	4	2	10	2	10 - 50 %	•	•	•	2	13		•	•	X 555, Y 262, Z 85	CL		
SMARTDRIVER-2 TW IR 2C+2 x6 ELC (white)	EC10431487	2	6	2	6	2	10 - 50 %	•	•	•	2	13			•	X 555, Y 262, Z 85	CK	•	★
SMARTDRIVER-2 TW IR 2C+2 x6 ELC KNX (white)	EC10431456	2	6	2	6	2	10 - 50 %	•	•	•	2	13		•	•	X 555, Y 262, Z 85	CL		
SMARTDRIVER-2 TW IR 2C+2 x8 ELC (white)	EC10431494	2	8	2	5	2	10 - 50 %	•	•	•	2	13			•	X 555, Y 262, Z 85	CK	•	★
SMARTDRIVER-2 TW IR 2C+2 x8 ELC KNX (white)	EC10431463	2	8	2	5	2	10 - 50 %	•	•	•	2	13		•	•	X 555, Y 262, Z 85	CL		

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Cable					
CABLE RJ10 10m WH	EC10431500	Connection cable RJ10, 10 m	X 10000	•	★
CABLE RJ10-OPEN END 10m WH	EC10431517	Connection cable RJ10 Open end, 10 m	X 10000	•	★
CABLE RJ11 10m WH	EC10431524	Connection cable RJ11, 10 m, white	X 10000	•	★
CABLE RJ45 10m BL	EQ10019999	Connection cable RJ45, 10 m, blue	X 10000	•	
CABLE RJ45 10m RD	EQ10020155	Connection cable RJ45, 10 m, red	X 10000	•	
CABLE RJ45 10m WH	EC10430749	Connection cable RJ45, 10 m, white	X 10000	•	
CABLE RJ45 3m BL	EC10431548	Connection cable RJ45, 3 m, blue	X 3000	•	★


Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
CABLE RJ45 3m RD	EC10431555	Connection cable RJ45, 3 m, red	X 3000	•	★
CABLE RJ45 3m WH	EC10431531	Connection cable RJ45, 3 m, white	X 3000	•	★
CABLE RJ45 5m BL	EQ10019982	Connection cable RJ45, 5 m, blue	X 5000	•	
CABLE RJ45 5m RD	EQ10019890	RJ45 connection cable, 5 m, red	X 5000	•	
CABLE RJ45 5m WH	EC10430695	Connection cable RJ45, 5 m, white	X 5000	•	
FERRITE-SET x4	EC10429972	Set of 4 ferrite cores (folding ferrite) for shielding up to two RJ45 cables per ferrite core on the SMARTDRIVER-2	X 40, Y 24, Z 20	•	★
CABLE-SET-2 RJ45 10m TW x4	EC10431951	Connection cable set for SMARTDRIVER x4 TW series	X 10000	•	★
CABLE-SET-2 RJ45 10m TW x6	EC10431975	Connection cable set for SMARTDRIVER x6 TW series	X 10000	•	★
CABLE-SET-2 RJ45 10m TW x8	EC10431999	Connection cable set for SMARTDRIVER x8 TW series	X 10000	•	★
CABLE-SET-2 RJ45 10m x4	EC10431913	Connection cable set for SMARTDRIVER x4 series	X 10000	•	★
CABLE-SET-2 RJ45 10m x8	EC10431937	Connection cable set for SMARTDRIVER x8 series	X 10000	•	★
CABLE-SET-2 RJ45 5m TW x4	EC10431944	Connection cable set for SMARTDRIVER x4 TW series	X 5000	•	★
CABLE-SET-2 RJ45 5m TW x6	EC10431968	Connection cable set for SMARTDRIVER x6 TW series	X 5000	•	★
CABLE-SET-2 RJ45 5m TW x8	EC10431982	Connection cable set for SMARTDRIVER x8 TW series	X 5000	•	★
CABLE-SET-2 RJ45 5m x4	EC10431906	Connection cable set for SMARTDRIVER x4 series	X 5000	•	★
CABLE-SET-2 RJ45 5m x8	EC10431920	Connection cable set for SMARTDRIVER x8 series	X 5000	•	★

Electrical accessories

ACTUATOR FULL AUTO C3 DALI	EP10427473	Modul for the conversion of bus commands from the DALI presence detector and other light controls into switching signals (fully automatic)	X 45, Y 45, Z 24	•	
ACTUATOR SEMI AUTO C4 DALI	EP10427480	Modul for the conversion of bus commands from the DALI presence detector and other light controls into switching signals (semi-automatic)	X 45, Y 45, Z 24	•	

Push button

PUSH BUTTON x4 PATIENT ROOM ELC	EC10431258	DALI 4-way push button	X 71, Y 71, Z 21,5	•	
PUSH BUTTON x8 CLASSROOM ELC	EC10431241	DALI 8-way push button	X 71, Y 71, Z 21,5	•	
PUSH BUTTON x8 ELC	EC10430923	DALI 8-way push button	X 71, Y 71, Z 21,5	•	
PUSH BUTTON x8 PATIENT ROOM ELC	EC10431265	DALI 8-way push button	X 71, Y 71, Z 21,5	•	
PUSH BUTTON x8 TW ELC	EC10430930	DALI 8 x push button Tunable White	X 71, Y 71, Z 21,5	•	

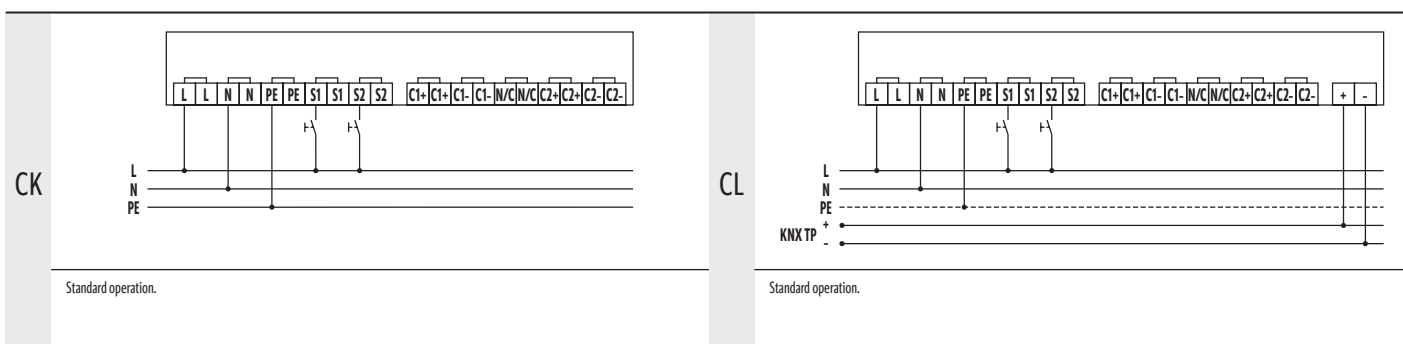

3 YEARS
MANUFACTURER
WARRANTY



The Protector series provides comprehensive protection against typical hazards in buildings.

PROTECTOR


SMART TECHNOLOGY FOR SUSTAINABLE SAFETY

Smoke detector

Universal compatibility due to stand-alone mounting or networking



PRODUCT TYPES



PROTECTOR


INDOOR AUTOMATION / SMOKE ALARM

- Smoke detector
- Universal compatibility due to stand-alone mounting or networking



Product group/product name	Item no.	Installation type	230 V (ON / OFF)	1 - 10 V	DALI	ELC	BT (Bluetooth)	KNX	UC / 12 - 36 V	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Smoke alarm / Ceiling mounting / ON/OFF													
PROTECTOR K 230 V ~ (white, similar to RAL 9010)	ER10018916	Surface mounted (plaster)								X 106, Z 48	CN	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Electrical accessories					
PROTECTOR K 230 V FILTER	ER10019098	Filter for PROTECTOR K series to prevent network interference, 230 V ~	X 106, Z 27	•	
PROTECTOR K RELAY	ER10018923	Switching relay for PROTECTOR K series for triggering external devices such as sounders, flash lights and alarm horns	X 41, Y 28, Z 23	•	
Mounting					
PROTECTOR K MOUNTING BOX 20 SM WH	ER10018992	Surface-mounted box for PROTECTOR K series, 20 mm	X 106, Z 20	•	
PROTECTOR K MOUNTING BOX 27 SM WH	ER10018985	Surface-mounted box for PROTECTOR K series, 27 mm	X 106, Z 27	•	
Protection					
BASKET GUARD ROUND LARGE	EM10425608	Basket guard for presence and motion detectors and smoke detectors, Ø 180 mm, height 90 mm	X 180, Z 90	•	
BASKET GUARD ROUND SMALL	EM10425615	Basket guard for presence and motion detectors and smoke detectors, Ø 165 mm, height 70 mm	X 165, Z 70	•	

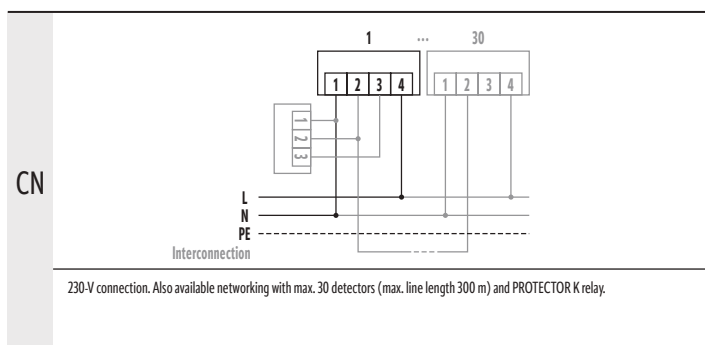



- Pre-configured, ready-to-install ELC integrated solution with plug-and-play installation
- Smart factory settings for immediate commissioning
- Variant with SymbiLogic technology for energy-efficient Human Centric Lighting

5 YEARS
MANUFACTURER
WARRANTY

The ELC lighting systems are an ideal solution for workplace lighting in office buildings, educational and healthcare facilities. The sets are installed by plug-and-play with no programming required. The combination of the master and slave luminaires with directly integrated sensors and control unit delivers high-quality lighting with intelligent, presence and daylight dependent control — and at the highest configuration level it produces the biologically effective light of the SymbiLogic technology.

Parameterisable with ESY-Pen and ESY-App. More on pages 220 – 221 and at: esylux.com/esy-pen.

ESYLUX LIGHT CONTROL ELC

INTELLIGENT LIGHTING SYSTEMS

Plug-and-play lighting solutions with no programming required

Simply install, group and scale using plug-and-play

Long lifetime due to positioning of LEDs on rear

Alternative: fixed Colour temperature 4000 K (constant lighting control)

Suitable for computer workstations (UGR ≤ 19)

Ready-to-install integrated solution for rooms up to approx. 20 m² in area:
4x LED recessed lights for ceiling systems, sensors, control unit, cable
(please note any special features and restrictions imposed by the ceiling system manufacturer)

Up to 60 % reduction in installation time


Cost-efficient: Price per square metre from EUR 60 incl. SymbioLogic technology for energy-efficient human centric lighting (Colour temperature: Tunable White, 2700 – 6500 K)

Flicker-free light for healthy and fatigue-free working

Available for different system dimensions



PRODUCT TYPES



LIGHT DISTRIBUTION	FIELD OF DETECTION	DETECTION RANGE	
			Ceiling 8 m Ceiling 24 m
		Diagonally (A)	Ø 8 m Ø 24 m
		Frontal (B)	Ø 6 m Ø 11 m
		Presence area (C)	Ø 4 m Ø 8 m

■ C0, ■ C90, ■ C0 / C90

Note: Technical data for specific products can be found at www.esylux.com.

ESYLUX LIGHT CONTROL ELC

INDOOR LIGHTING / PRE-CONFIGURED LIGHTING SYSTEMS FOR OFFICES



- Plug-and-play lighting solutions with no programming required
- Ready-to-install integrated solution for rooms up to approx. 20 m² in area: 4x LED recessed lights for ceiling systems, sensors, control unit, cable (please note any special features and restrictions imposed by the ceiling system manufacturer)
- Simply install, group and scale using plug-and-play
- Up to 60 % reduction in installation time
- Long lifetime due to positioning of LEDs on rear
- Cost-efficient: Price per square metre from EUR 60 incl. SymbiLogic technology for energy-efficient human centric lighting (Colour temperature: Tunable White, 2700 – 6500 K)
- Alternative: fixed Colour temperature 4000 K (constant lighting control)
- Flicker-free light for healthy and fatigue-free working
- Suitable for computer workstations (UGR ≤ 19)
- Available for different system dimensions
- Also suitable for recessed ceiling mounting or surface ceiling mounting with accessories

Product group/product name	Item no.	Light colour (IEC 1231)	Luminous flux	Rated output P	Luminous efficacy	Unified Glare Rating	Glare suppression	Diffuser	Protection type	Control system	BT (Bluetooth)	Sensor	Energy efficiency class	Dimensions (mm)	Circuit diagram	Core portfolio	New product
CELINE-2 / 2700 - 6500 K / 600 x 600 mm																	
QUADRO-SET CELINE-2 HCL 600 DDP OP 8TW IR ELC (white, similar to RAL 9016)	EQ10132438	8TW	16000 lm	132 W	121 lm/W	≤ 19	DDP	OP	IP20	ELC	•	•	LED EEI E	X 596, Y 596, Z 65			★
QUADRO-SET CELINE-2 HCL 600 DDP TR 8TW IR ELC (white, similar to RAL 9016)	EQ10132452	8TW	17600 lm	132 W	133 lm/W	≤ 19	DDP	TR	IP20	ELC	•	•	LED EEI E	X 596, Y 596, Z 65			★
CELINE-2 / 4000 K / 600 x 600 mm																	
QUADRO-SET CELINE-2 600 DDP OP 840 IR ELC (white, similar to RAL 9016)	EQ10132421	840	16800 lm	132 W	127 lm/W	≤ 19	DDP	OP	IP20	ELC	•	•	LED EEI E	X 596, Y 596, Z 65			★
QUADRO-SET CELINE-2 600 DDP TR 840 IR ELC (white, similar to RAL 9016)	EQ10132445	840	18400 lm	132 W	139 lm/W	< 19	DDP	TR	IP20	ELC	•	•	LED EEI E	X 596, Y 596, Z 65			★

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Cable					
CABLE RJ10 10m WH	EC10431500	Connection cable RJ10, 10 m	X 10000	•	★
CABLE RJ10-OPEN END 10m WH	EC10431517	Connection cable RJ10 Open end, 10 m	X 10000	•	★
CABLE RJ11 10m WH	EC10431524	Connection cable RJ11, 10 m, white	X 10000	•	★
Electrical accessories					
ACTUATOR FULL AUTO C3 DALI	EP10427473	Modul for the conversion of bus commands from the DALI presence detector and other light controls into switching signals (fully automatic)	X 45, Y 45, Z 24	•	
ACTUATOR SEMI AUTO C4 DALI	EP10427480	Modul for the conversion of bus commands from the DALI presence detector and other light controls into switching signals (semi-automatic)	X 45, Y 45, Z 24	•	
Mounting					
MOUNTING FRAME 600 FM WH	EQ10113086	Flush-mounted ceiling installation frame 600 for panel lights	X 635,4, Y 635, Z 48,2	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio New product
MOUNTING FRAME 600/625 SM WH	EQ10113468	Surface-mounted ceiling installation frame 600/625 for panel lights	X 627,2, Y 627, Z 100	•
Push button				
PUSH BUTTON x4 PATIENT ROOM ELC	EC10431258	DALI 4-way push button	X 71, Y 71, Z 21,5	•
PUSH BUTTON x8 CLASSROOM ELC	EC10431241	DALI 8-way push button	X 71, Y 71, Z 21,5	•
PUSH BUTTON x8 ELC	EC10430923	DALI 8-way push button	X 71, Y 71, Z 21,5	•
PUSH BUTTON x8 PATIENT ROOM ELC	EC10431265	DALI 8-way push button	X 71, Y 71, Z 21,5	•
PUSH BUTTON x8 TW ELC	EC10430930	DALI 8 x push button Tunable White	X 71, Y 71, Z 21,5	•
Remote control				
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•

- Freely configurable intelligent system lights
- Smart factory settings for immediate commissioning
- SymbiLogic Technology for energy-efficient Human Centric Lighting

The ESYLUX Light Control ELC technology is designed to radically simplify intelligent lighting and ventilation of rooms while at the same time offering the best possible light quality, even for those on a limited budget. You have the option to easily compile your own customised lighting system from various individual components, including ELC ceiling lights, ELC sensors, ELC control units (SMARTDRIVER), cables and other accessories. All items can be installed via plug-and-play, the system can be used immediately without any programming effort and rapid modernisation is possible during ongoing operation. The integrated SymbiLogic technology delivers energy-efficient Human Centric Lighting, while demand-driven ventilation ensures an optimal indoor climate.

Parameterisable with ESY-Pen and ESY-App. More on pages 220 – 221 and at: esylux.com/esy-pen.

ESYLUX LIGHT CONTROL ELC

FREELY CONFIGURABLE INTELLIGENT SYSTEM LIGHTS

Prices per square metre include lights, presence detectors, controls and cabling, and exclude VAT and installation costs

Includes quality of life: SymbiLogic technology for energy-efficient Human Centric Lighting (light colour: Tunable White)

Error-free networking: simple grouping via plug-and-play

Individual control: convenient manual or digital operating options

Plug-and-play in a new dimension: easy to configure in seven steps



EASY TO CONFIGURE IN SEVEN STEPS



PRODUCT TYPES

LIGHT DISTRIBUTION	FIELD OF DETECTION	DETECTION RANGE												
		<table> <thead> <tr> <th></th><th>Ceiling 8 m</th><th>Ceiling 24 m</th></tr> </thead> <tbody> <tr> <td>Diagonally (A)</td><td>Ø 8 m</td><td>Ø 24 m</td></tr> <tr> <td>Frontal (B)</td><td>Ø 6 m</td><td>Ø 11 m</td></tr> <tr> <td>Presence area (C)</td><td>Ø 4 m</td><td>Ø 8 m</td></tr> </tbody> </table>		Ceiling 8 m	Ceiling 24 m	Diagonally (A)	Ø 8 m	Ø 24 m	Frontal (B)	Ø 6 m	Ø 11 m	Presence area (C)	Ø 4 m	Ø 8 m
	Ceiling 8 m	Ceiling 24 m												
Diagonally (A)	Ø 8 m	Ø 24 m												
Frontal (B)	Ø 6 m	Ø 11 m												
Presence area (C)	Ø 4 m	Ø 8 m												

■ C0, ■ C90, ■ C0 / C90

Note: Technical data for specific products can be found at www.esylux.com.

ESYLUX LIGHT CONTROL ELC

INDOOR LIGHTING | FREELY CONFIGURABLE LIGHTING SYSTEMS



- Prices per square metre include lights, presence detectors, controls and cabling, and exclude VAT and installation costs
- Includes quality of life: SymbiLogic technology for energy-efficient Human Centric Lighting (light colour: Tunable White)
- Error-free networking: simple grouping via plug-and-play
- Individual control: convenient manual or digital operating options
- Plug-and-play in a new dimension: easy to configure in seven steps

Product group/product name	Item no.	Light colour (IEC 1231)	Luminous flux	Rated output P	Luminous efficacy	Unified Glare Rating	Glare suppression	Diffuser	Protection type	Control system	BT (Bluetooth)	Sensor	Energy efficiency class	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Recessed lights CELINE-2																	
2700 – 6500 K / 600 x 600 mm / 30 W																	
CELINE-2 PNL 600 DDP OP 3800 8TW IP20 ELC (white, similar to RAL 9016)	EQ10132322	8TW	4000 lm	33 W	121 lm/W	< 19	DDP	OP	IP20	ELC			LED EEI E	X 596, Y 596, Z 65		•	
CELINE-2 PNL 600 DDP TR 4200 8TW IP20 ELC (white, similar to RAL 9016)	EQ10132353	8TW	4400 lm	33 W	133 lm/W	< 19	DDP	TR	IP20	ELC			LED EEI E	X 596, Y 596, Z 65		•	
3000 K / 600 x 600 mm / 30 W																	
CELINE-2 PNL 600 DDP OP 3600 830 IP20 ELC (white, similar to RAL 9016)	EQ10132308	830	3900 lm	33 W	118 lm/W	< 19	DDP	OP	IP20	ELC			LED EEI E	X 596, Y 596, Z 65		•	
CELINE-2 PNL 600 DDP TR 4000 830 IP20 ELC (white, similar to RAL 9016)	EQ10132339	830	4300 lm	33 W	130 lm/W	< 19	DDP	TR	IP20	ELC			LED EEI E	X 596, Y 596, Z 65		•	
4000 K / 600 x 600 mm / 30 W																	
CELINE-2 PNL 600 DDP OP 4000 840 IP20 ELC (white, similar to RAL 9016)	EQ10132315	840	4200 lm	33 W	127 lm/W	< 19	DDP	OP	IP20	ELC			LED EEI E	X 596, Y 596, Z 65		•	
CELINE-2 PNL 600 DDP TR 4400 840 IP20 ELC (white, similar to RAL 9016)	EQ10132346	840	4600 lm	33 W	139 lm/W	< 19	DDP	TR	IP20	ELC			LED EEI E	X 596, Y 596, Z 65		•	

Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Function	Constant lighting control	Push button input lighting	In-rush current	Adjustable switch-off delay time	Number of HVAC-channels	Push button input HVAC	Slave input	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Presence detectors BASIC																		
Presence detectors / Ceiling mounting / ELC																		
PD 360i/8 BASIC ELC (white, similar to RAL 9010)	EB10431357	360 °	Ø 8 m	SM	4	Switching/Regulate	•			•	2			IP20	X 101, Z 33	Y	•	
Presence detectors COMPACT																		
Presence detectors / Ceiling mounting / ELC																		
PD-C 360i/24 ELC (white, similar to RAL 9010)	EP10427619	360 °	Ø 24 m	FM	4	Send values	•			•	2			IP20	X 108, Z 70	P	•	
PD-C 360i/8 ELC (white, similar to RAL 9010)	EP10427602	360 °	Ø 8 m	FM	4	Send values	•			•	2			IP20	X 108, Z 62	P	•	

Product group/product name	Item no.	Number of light channels	Number of outputs luminaires ELC	Number of outputs luminaires DALI	Number of control units per group	Number of HVAC- channels	Orientation light	Constant lighting control	Orientation light duration or time	HCL-lighting control	Push button input lighting	Number of scenes	BT (Bluetooth)	KNX	ELC	Dimensions (mm)	Circuit diagram	Core portfolio	New product
SMARTDRIVER-2																			
Controls / ELC																			
SMARTDRIVER-2 IR 4C+2 x4 ELC (white)	EC10431401	4	4	2	20	2	10 - 50 %	•	•		2	4			•	X 555, Y 262, Z 85	CK	•	★
SMARTDRIVER-2 IR 4C+2 x4 ELC KNX (white)	EC10431449	4	4	2	20	2	10 - 50 %	•	•		2	4		•	•	X 555, Y 262, Z 85	CL		
SMARTDRIVER-2 IR 4C+2 x8 ELC (white)	EC10431425	4	8	2	10	2	10 - 50 %	•	•		2	4			•	X 555, Y 262, Z 85	CK	•	★
SMARTDRIVER-2 IR 4C+2 x8 ELC KNX (white)	EC10431432	4	8	2	10	2	10 - 50 %	•	•		2	4		•	•	X 555, Y 262, Z 85	CL		
SMARTDRIVER-2 TW IR 2C+2 x4 ELC (white)	EC10431418	2	4	2	10	2	10 - 50 %	•	•	•	2	13			•	X 555, Y 262, Z 85	CK	•	★
SMARTDRIVER-2 TW IR 2C+2 x4 ELC KNX (white)	EC10431470	2	4	2	10	2	10 - 50 %	•	•	•	2	13		•	•	X 555, Y 262, Z 85	CL		
SMARTDRIVER-2 TW IR 2C+2 x6 ELC (white)	EC10431487	2	6	2	6	2	10 - 50 %	•	•	•	2	13			•	X 555, Y 262, Z 85	CK	•	★
SMARTDRIVER-2 TW IR 2C+2 x6 ELC KNX (white)	EC10431456	2	6	2	6	2	10 - 50 %	•	•	•	2	13		•	•	X 555, Y 262, Z 85	CL		
SMARTDRIVER-2 TW IR 2C+2 x8 ELC (white)	EC10431494	2	8	2	5	2	10 - 50 %	•	•	•	2	13			•	X 555, Y 262, Z 85	CK	•	★
SMARTDRIVER-2 TW IR 2C+2 x8 ELC KNX (white)	EC10431463	2	8	2	5	2	10 - 50 %	•	•	•	2	13		•	•	X 555, Y 262, Z 85	CL		

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Cable					
CABLE RJ10 10m WH	EC10431500	Connection cable RJ10, 10 m	X 10000	•	★
CABLE RJ10-OPEN END 10m WH	EC10431517	Connection cable RJ10 Open end, 10 m	X 10000	•	★
CABLE RJ11 10m WH	EC10431524	Connection cable RJ11, 10 m, white	X 10000	•	★
CABLE RJ45 10m BL	EQ10019999	Connection cable RJ45, 10 m, blue	X 10000	•	
CABLE RJ45 10m RD	EQ10020155	Connection cable RJ45, 10 m, red	X 10000	•	
CABLE RJ45 10m WH	EC10430749	Connection cable RJ45, 10 m, white	X 10000	•	
CABLE RJ45 3m BL	EC10431548	Connection cable RJ45, 3 m, blue	X 3000	•	★
CABLE RJ45 3m RD	EC10431555	Connection cable RJ45, 3 m, red	X 3000	•	★
CABLE RJ45 3m WH	EC10431531	Connection cable RJ45, 3 m, white	X 3000	•	★

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
CABLE RJ45 5m BL	EQ10019982	Connection cable RJ45, 5 m, blue	X 5000	•	
CABLE RJ45 5m RD	EQ10019890	RJ45 connection cable, 5 m, red	X 5000	•	
CABLE RJ45 5m WH	EC10430695	Connection cable RJ45, 5 m, white	X 5000	•	
FERRITE-SET x4	EC10429972	Set of 4 ferrite cores (folding ferrite) for shielding up to two RJ45 cables per ferrite core on the SMARTDRIVER-2	X 40, Y 24, Z 20	•	★
CABLE-SET-2 RJ45 10m TW x4	EC10431951	Connection cable set for SMARTDRIVER x4 TW series	X 10000	•	★
CABLE-SET-2 RJ45 10m TW x6	EC10431975	Connection cable set for SMARTDRIVER x6 TW series	X 10000	•	★
CABLE-SET-2 RJ45 10m TW x8	EC10431999	Connection cable set for SMARTDRIVER x8 TW series	X 10000	•	★
CABLE-SET-2 RJ45 10m x4	EC10431913	Connection cable set for SMARTDRIVER x4 series	X 10000	•	★
CABLE-SET-2 RJ45 10m x8	EC10431937	Connection cable set for SMARTDRIVER x8 series	X 10000	•	★
CABLE-SET-2 RJ45 5m TW x4	EC10431944	Connection cable set for SMARTDRIVER x4 TW series	X 5000	•	★
CABLE-SET-2 RJ45 5m TW x6	EC10431968	Connection cable set for SMARTDRIVER x6 TW series	X 5000	•	★
CABLE-SET-2 RJ45 5m TW x8	EC10431982	Connection cable set for SMARTDRIVER x8 TW series	X 5000	•	★
CABLE-SET-2 RJ45 5m x4	EC10431906	Connection cable set for SMARTDRIVER x4 series	X 5000	•	★
CABLE-SET-2 RJ45 5m x8	EC10431920	Connection cable set for SMARTDRIVER x8 series	X 5000	•	★
Electrical accessories					
ACTUATOR FULL AUTO C3 DALI	EP10427473	Modul for the conversion of bus commands from the DALI presence detector and other light controls into switching signals (fully automatic)	X 45, Y 45, Z 24	•	
ACTUATOR SEMI AUTO C4 DALI	EP10427480	Modul for the conversion of bus commands from the DALI presence detector and other light controls into switching signals (semi-automatic)	X 45, Y 45, Z 24	•	
Mounting					
MOUNTING FRAME 600 FM WH	EQ10113086	Flush-mounted ceiling installation frame 600 for panel lights	X 635,4, Y 635, Z 48,2	•	
MOUNTING FRAME 625 FM WH	EQ10113093	Surface-mounted ceiling installation frame 625 for panel lights	X 660,4, Y 660, Z 48,2	•	
MOUNTING FRAME 600/625 SM WH	EQ10113468	Surface-mounted ceiling installation frame 600/625 for panel lights	X 627,2, Y 627, Z 100	•	
Protection					
DROP PROTECTION	EQ10121616	Steel cable for securing ESYLUX panel lights to the ceiling.	X 800	•	
Push button					
PUSH BUTTON x8 TW ELC	EC10430930	DALI 8 x push button Tunable White	X 71, Y 71, Z 21,5	•	
PUSH BUTTON x8 ELC	EC10430923	DALI 8-way push button	X 71, Y 71, Z 21,5	•	
Remote control					
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•	



- Energy-efficient lighting with high light quality
- Plug-and-play connection for system lights with ESYLUX Light Control (ELC)
- Powerful Tunable White variants for energy-efficient Human Centric Lighting with SymbiLogic technology



The LED recessed lights in the CELINE-2 series provide the highest-quality lighting in workplaces such as offices, educational institutions and medical facilities. These lights are suitable for use as system lights with ESYLUX Light Control (ELC) via their plug-and-play connection and can also be used in DALI lighting systems via driver sets that are available as an optional accessory. Variants with Tunable White enable energy-efficient human centric lighting with SymbiLogic technology using ELC system lights or DALI-2 presence detectors from ESYLUX.

CELINE-2

LIGHT QUALITY FOR THE MOST DEMANDING VISUAL TASKS

Recessed lights for ceiling systems with hidden or visible mounting rails

Plug-and-play connection for system lights with ESYLUX Light Control (ELC)

Variants with Tunable White (2700 – 6500 K) for SymbiLogic technology

Suitable for screen-based work places in accordance with DIN EN 12464-1 (UGR ≤ 19)

Accessories: Ceiling installation frame and surface-mounted ceiling frame (600 x 600)

Note: Please observe any special features and restrictions stipulated by the ceiling system manufacturer.

Suitable for use in other lighting systems when using driver sets (available as an optional accessory)


Homogeneous illumination and long service life due to the backlight layout of the LEDs

Flicker-free lighting for healthy, fatigue-free working


Robust, durable metal housing



PRODUCT TYPES



LIGHT DISTRIBUTION



□ C0, □ C90, ■ C0 / C90

Note: Technical data for specific products can be found at www.esylux.com.

CELINE-2

INDOOR LIGHTING / RECESSED LIGHTS



- Recessed lights for ceiling systems with hidden or visible mounting rails
- Note: Please observe any special features and restrictions stipulated by the ceiling system manufacturer.
- Plug-and-play connection for system lights with ESYLUX Light Control (ELC)
- Suitable for use in other lighting systems when using driver sets (available as an optional accessory)
- Variants with Tunable White (2700 – 6500 K) for SymbiLogic technology
- Homogeneous illumination and long service life due to the backlight layout of the LEDs
- Suitable for screen-based work places in accordance with DIN EN 12464-1 (UGR ≤ 19)
- Flicker-free lighting for healthy, fatigue-free working
- Accessories: Ceiling installation frame and surface-mounted ceiling frame (600 x 600)
- Robust, durable metal housing
- Front housing cover made from a single piece
- High-quality PMMA plastic diffusor

Product group/product name	Item no.	Light colour (IEC 1231)	Luminous flux	Rated output P	Luminous efficacy	Unified Glare Rating	Glare suppression	Diffuser	Protection type	Control system	BT (Bluetooth)	Sensor	Energy efficiency class	Dimensions (mm)	Circuit diagram	Core portfolio	New product
2700 - 6500 K / 600 x 600 mm / 30 W																	
CELINE-2 PNL 600 DDP OP 3800 8TW IP20 ELC (white, similar to RAL 9016)	EQ10132322	8TW	4000 lm	33 W	121 lm/W	< 19	DDP	OP	IP20	ELC			LED EEI E	X 596, Y 596, Z 65		•	
CELINE-2 PNL 600 DDP TR 4200 8TW IP20 ELC (white, similar to RAL 9016)	EQ10132353	8TW	4400 lm	33 W	133 lm/W	< 19	DDP	TR	IP20	ELC			LED EEI E	X 596, Y 596, Z 65		•	
3000 K / 600 x 600 mm / 30 W																	
CELINE-2 PNL 600 DDP OP 3600 830 IP20 ELC (white, similar to RAL 9016)	EQ10132308	830	3900 lm	33 W	118 lm/W	< 19	DDP	OP	IP20	ELC			LED EEI E	X 596, Y 596, Z 65		•	
CELINE-2 PNL 600 DDP TR 4000 830 IP20 ELC (white, similar to RAL 9016)	EQ10132339	830	4300 lm	33 W	130 lm/W	< 19	DDP	TR	IP20	ELC			LED EEI E	X 596, Y 596, Z 65		•	
4000 K / 600 x 600 mm / 30 W																	
CELINE-2 PNL 600 DDP OP 4000 840 IP20 ELC (white, similar to RAL 9016)	EQ10132315	840	4200 lm	33 W	127 lm/W	< 19	DDP	OP	IP20	ELC			LED EEI E	X 596, Y 596, Z 65		•	
CELINE-2 PNL 600 DDP TR 4400 840 IP20 ELC (white, similar to RAL 9016)	EQ10132346	840	4600 lm	33 W	139 lm/W	< 19	DDP	TR	IP20	ELC			LED EEI E	X 596, Y 596, Z 65		•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Control gear					
DRIVER-SET 30W 700mA RJ45	EQ10127878	Plug-and-play LED driver set ON/OFF 30 W	X 119, Y 42, Z 28	•	★
DRIVER-SET 30W 700mA RJ45 DALI-2	EQ10127793	Plug-and-play LED driver set 30 W DALI-2	X 103, Y 68, Z 31	•	★
DRIVER-SET 30W 700mA RJ45 WAGO WINSTA DALI-2	EQ10127809	Plug-and-play LED driver set 30 W DALI-2, WAGO WINSTA	X 103, Y 68, Z 31	•	★
DRIVER-SET 30W 700mA RJ45 WIELAND GST DALI-2	EQ10127816	Plug-and-play LED driver set 30 W DALI-2, WIELAND GST	X 103, Y 68, Z 31	•	★
DRIVER-SET TW 32W 700mA RJ45 DALI-2 DT8	EQ10127847	Plug-and-play LED driver set DALI-2 DT8	X 117, Y 46, Z 29	•	★

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
DRIVER-SET TW 32W 700mA RJ45 WAGO WINSTA DALI-2 DT8	EQ10127830	Plug-and-play LED driver set DALI-2 DT8, WAGO WINSTA	X 117, Y 46, Z 29	•	★
DRIVER-SET TW 32W 700mA RJ45 WIELAND GST DALI-2 DT8	EQ10127823	Plug-and-play LED driver set DALI-2 DT8, WIELAND GST	X 117, Y 46, Z 29	•	★
Mounting					
MOUNTING FRAME 600 FM WH	EQ10113086	Flush-mounted ceiling installation frame 600 for panel lights	X 635,4, Y 635, Z 48,2	•	
MOUNTING FRAME 600/625 SM WH	EQ10113468	Surface-mounted ceiling installation frame 600/625 for panel lights	X 627,2, Y 627, Z 100	•	
Remote control					
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•	

- Flat design for universal use
- Homogeneous light emission
- Three installation types: Recessed light, also suitable for surface mounting with accessories

5 YEARS
MANUFACTURER
WARRANTY



With their low profile design, LED recessed lights in the STELLA series are well-suited to flexible applications in offices, learning environments and healthcare facilities. As such, they fulfil all requirements of contemporary light installations in terms of their straightforward handling, light quality and energy efficiency.

STELLA

FLAT AND FLEXIBLE

Easy installation at a low installation heights due to the particularly flat design (housing height: 10 mm)

Installation with no additional accessories, electronic ballast included in delivery

DALI variants with SwitchDIM function for 230 V push button

For conventional system ceilings: 600 x 600 mm

Suitable for computer workstations (UGR ≤ 19)

Low weight for easy handling


Electronic ballast simply plugs in to connect to the luminaire

Two installation types: Recessed light, also suitable for surface mounting with accessories



Flicker-free light for healthy and fatigue-free working



PRODUCT TYPES



LIGHT DISTRIBUTION



□ C0, □ C90, ■ C0 / C90

Note: Technical data for specific products can be found at www.esylux.com.




- Easy installation at a low installation heights due to the particularly flat design (housing height: 10 mm)
- Low weight for easy handling
- Installation with no additional accessories, electronic ballast included in delivery
- Electronic ballast simply plugs in to connect to the luminaire
- DALI variants with SwitchDIM function for 230 V push button
- Two installation types: Recessed light, also suitable for surface mounting with accessories
- For conventional system ceilings: 600 x 600 mm
- Flicker-free light for healthy and fatigue-free working
- Suitable for computer workstations ($UGR \leq 19$)

Product group/product name	Item no.	Light colour (IEC 1231)	Luminous flux	Rated output P	Luminous efficacy	Unified Glare Rating	Glare suppression	Diffuser	Protection type	Control system	BT (Bluetooth)	Sensor	Energy efficiency class	Dimensions (mm)	Circuit diagram	Core portfolio	New product
3000 K / 600 x 600 mm / 33 W																	
STELLA PNL 600 OP 3600 830 IP20 (white, similar to RAL 9003)	EQ10600012	830	3700 lm	35,5 W	104 lm/W	≤ 22	OP	IP20	ON/OFF					X 595, Y 595, Z 11	BR	•	
4000 K / 600 x 600 mm / 33 W																	
STELLA PNL 600 DDP OP 3800 840 IP20 (white, similar to RAL 9003)	EQ10600227	840	3900 lm	37 W	105 lm/W	≤ 19	DDP	OP	IP20	ON/OFF				X 595, Y 595, Z 11	BR	•	
STELLA PNL 600 DDP OP 3800 840 IP20 DALI (white, similar to RAL 9003)	EQ10600234	840	3800 lm	37 W	102 lm/W	≤ 19	DDP	OP	IP20	DALI				X 595, Y 595, Z 11	BS	•	


Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Mounting					
MOUNTING FRAME 600 FM WH	EQ10113086	Flush-mounted ceiling installation frame 600 for panel lights	X 635,4, Y 635, Z 48,2	•	
STELLA MOUNTING FRAME 600 SM WH	EQ10600173	Ceiling installation frame for STELLA series, 600 mm	X 602, Y 602, Z 50	•	
Protection					
DROP PROTECTION	EQ10121616	Steel cable for securing ESYLUX panel lights to the ceiling.	X 800	•	

BR



Standard operation.

BS



Standard operation.

- Particularly resistant version with IK10 and IP65
- Variants with integrated motion detector, optimised to control additional LED lights



The lights in the ALMA series are suitable for anywhere that requires robust yet stylish wall lighting or ceiling lighting. With IP65 protection type and IK10 impact resistance, these lights deliver continuous functionality even in adverse conditions, and the variants with integrated, invisible movement and light sensor technology enable demand-driven, energy-efficient operation.

ALMA

ELEGANT, ROBUST, OPTIONALLY INTELLIGENT

Protection type IP65

Impact resistance IK10

Variants with integrated motion detector (HF) for motion and daylight-dependent switching of lighting

Motion detector with switching output for master/master or master/slave networking

A metal plate prevents unwanted backwards detection, e.g. in neighbouring rooms

Easy to change the field of detection, switch-off delay time and target brightness via DIP switch in the light


Easy to install using plug-in terminals

Push terminals with through-wiring option

UV-resistant plastic diffuser



PRODUCT TYPES



LIGHT DISTRIBUTION	FIELD OF DETECTION	DETECTION RANGE		
			Ceiling 8 m	Wall 16 m
		Diagonally (A)	Ø 8 m	Ø 16 m
		-	-	-
		-	-	-

C0, C90, C0 / C90

Note: Technical data for specific products can be found at www.esylux.com.



- Protection type IP65
- Impact resistance IK10
- Variants with integrated motion detector (HF) for motion and daylight-dependent switching of lighting
- Motion detector with switching output for master/master or master/slave networking
- A metal plate prevents unwanted backwards detection, e.g. in neighbouring rooms
- Easy to change the field of detection, switch-off delay time and target brightness via DIP switch in the light
- Easy to install using plug-in terminals
- Push terminals with through-wiring option
- UV-resistant plastic diffuser

Product group/product name	Item no.	Light colour (IEC 1231)	Luminous flux	Rated output P	Luminous efficacy	Unified Glare Rating	Glare suppression	Diffuser	Protection type	Control system	BT (Bluetooth)	Sensor	Energy efficiency class	Dimensions (mm)	Circuit diagram	Core portfolio	New product
3000 K																	
ALMA WCL 300 OP 1600 830 IP65 (white, similar to RAL 9003)	E010850318	830	1600 lm	15,5 W	103 lm/W	≤ 22	OP	IP65	ON/OFF				LED EEI C	X 300, Z 87	BT	•	
ALMA WCL 300 OP 1600 830 IP65 MD (white, similar to RAL 9003)	E010850301	830	1600 lm	16 W	100 lm/W	≤ 22	OP	IP65	ON/OFF			•	LED EEI C	X 300, Z 87	BU	•	
4000 K																	
ALMA WCL 300 OP 1600 840 IP65 (white, similar to RAL 9003)	E010850332	840	1600 lm	15,5 W	103 lm/W	≤ 22	OP	IP65	ON/OFF				LED EEI C	X 300, Z 87	BT	•	
ALMA WCL 300 OP 1600 840 IP65 MD (white, similar to RAL 9003)	E010850325	840	1600 lm	16 W	100 lm/W	≤ 22	OP	IP65	ON/OFF			•	LED EEI C	X 300, Z 87	BU	•	

BT	<p>The diagram shows a terminal block with six terminals labeled N/C, N/C, N, L, L, PE, PE. The first two N/C terminals are connected to the L line. The third N terminal is connected to the N line. The fourth L terminal is connected to the PE line. The fifth L terminal is connected to the PE line. The sixth PE terminal is connected to the PE line. A 10 A switch is connected to the L line.</p>	BU	<p>The diagram shows a terminal block with six terminals labeled L', L', N, L, L, PE, PE. The first two L' terminals are connected to the L line. The third N terminal is connected to the N line. The fourth L terminal is connected to the PE line. The fifth L terminal is connected to the PE line. The sixth PE terminal is connected to the PE line. A 10 A switch is connected to the L line.</p>
	Standard operation.		Standard operation.



- Variants with integrated motion detector, optimised to control up to 3 additional LED lights



The LED lights in the ELLEN series feature a beautiful, timeless design, making them ideal for ceiling or wall mounting in hallways, staircases and function rooms. The optional concealed motion and light sensor technology and high level of luminous efficacy ensure energy-efficient operation on demand.

ELLEN

ROBUST WALL LIGHTING INTELLIGENTLY NETWORKED

Easy to install using plug-in terminals

Push terminals with through-wiring option

Variants with integrated motion detector (HF) for motion and daylight-dependent switching of lighting

Motion detector with switching output for master/master or master/slave networking

Easy to change the field of detection, switch-off delay time and target brightness via DIP switch in the light

Diffuser made from UV-resistant plastic, impact protection IK07


Flicker-free light

Available with protection types IP20 or IP44



INDOOR LIGHTING

PRODUCT TYPES



LIGHT DISTRIBUTION	FIELD OF DETECTION	DETECTION RANGE		
			Ceiling 8 m	Wall 16 m
		Diagonally (A)	Ø 8 - 10 m	Ø 20 m
		-	-	-
		-	-	-


C0, C90, C0 / C90

Note: Technical data for specific products can be found at www.esylux.com.



- Easy to install using plug-in terminals
- Push terminals with through-wiring option
- Variants with integrated motion detector (HF) for motion and daylight-dependent switching of lighting
- Motion detector with switching output for master/master or master/slave networking
- Easy to change the field of detection, switch-off delay time and target brightness via DIP switch in the light
- Diffuser made from UV-resistant plastic, impact protection IK07
- Flicker-free light
- Available with protection types IP20 or IP44

Product group/product name	Item no.	Light colour (IEC 1231)	Luminous flux	Rated output P	Luminous efficacy	Unified Glare Rating	Glare suppression	Diffuser	Protection type	Control system	BT (Bluetooth)	Sensor	Energy efficiency class	Dimensions (mm)	Circuit diagram	Core portfolio	New product
3000 K																	
ELLEN WCL 300 OP 1500 830 IP20 (white)	E010850011	830	1450 lm	11 W	131 lm/W	≤ 22	OP	IP20	ON/OFF				LED EEI C	X 300, Z 95	BV	•	
ELLEN WCL 300 OP 1500 830 IP20 MD (white)	E010850004	830	1450 lm	11,5 W	126 lm/W	≤ 22	OP	IP20	ON/OFF			•	LED EEI C	X 300, Z 95	BW	•	
ELLEN WCL 300 OP 1500 830 IP44 (white)	E010850097	830	1450 lm	11 W	131 lm/W	≤ 22	OP	IP44	ON/OFF				LED EEI C	X 300, Z 95	BV	•	
ELLEN WCL 300 OP 1500 830 IP44 MD (white)	E010850080	830	1450 lm	11,5 W	126 lm/W	≤ 22	OP	IP44	ON/OFF			•	LED EEI C	X 300, Z 95	BW	•	
4000 K																	
ELLEN WCL 300 OP 1600 840 IP20 (white)	E010850073	840	1550 lm	11 W	140 lm/W	≤ 22	OP	IP20	ON/OFF				LED EEI C	X 300, Z 95	BV	•	
ELLEN WCL 300 OP 1600 840 IP20 MD (white)	E010850066	840	1550 lm	11,5 W	134 lm/W	≤ 22	OP	IP20	ON/OFF			•	LED EEI C	X 300, Z 95	BW	•	
ELLEN WCL 300 OP 1600 840 IP44 (white)	E010850110	840	1550 lm	11 W	140 lm/W	≤ 22	OP	IP44	ON/OFF				LED EEI C	X 300, Z 95	BV	•	
ELLEN WCL 300 OP 1600 840 IP44 MD (white)	E010850103	840	1550 lm	11,5 W	134 lm/W	≤ 22	OP	IP44	ON/OFF			•	LED EEI C	X 300, Z 95	BW	•	

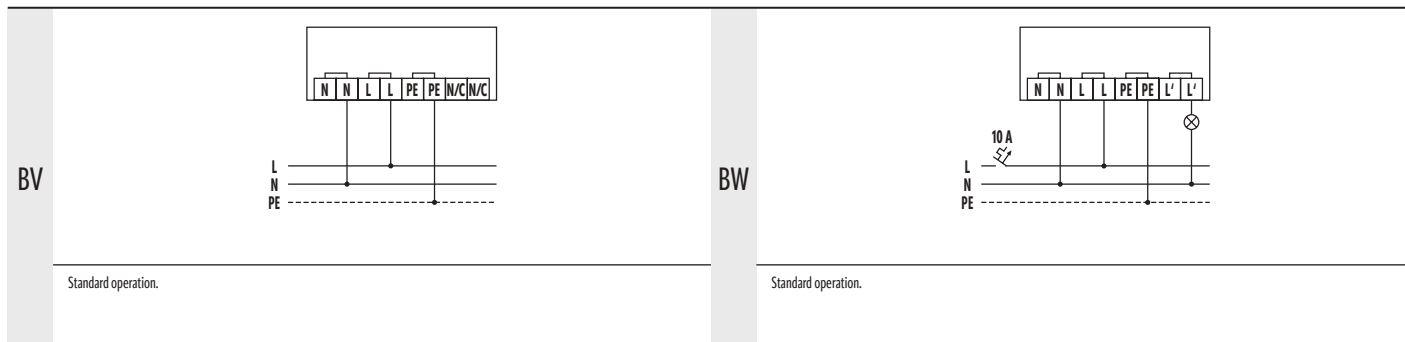



- High lighting quality in timeless, modern design
- Indirect light makes lights appear to float on the ceiling
- For presence and daylight dependent constant light control with DALI-2



High light quality, visual comfort through perfect glare suppression, easy to install: This is what characterises the SVENJA series LED surface-mounted lights. With a timeless, modern design, a high proportion of indirect light and the appearance of floating lights, they are ideal for use as atmospheric lighting solutions in social areas such as foyers, assembly halls, break areas and canteens. DALI-2 variants deliver presence and daylight dependent constant light control in schools, residential homes, hospitals and offices.

SVENJA

FUNCTIONAL DESIGN, FLOATING LIGHT

Flat surface-mounted LED lights in diameters of 450, 600 and 900 mm

High-quality, powder-coated aluminium housing

DALI-2 variants with fixed light colour for presence and daylight dependent constant light control or with Tunable White (2700 – 6500 K)

Possible control of the light colour and brightness of DALI-2 DT8 luminaires (TW) using an ESYLUX-specific push-button and a DALI power supply.

Indirect light component of 35 % improves the impression of the room and makes luminaires appear to float below the ceiling

Homogeneous, glare-free illumination and long LED service life thanks to flat backlight arrangement and harmonised lenses

DALI-2 (except Ø 900 mm) and DALI-2 DT8 (TW) variants have the SwitchDIM function


Simple installation thanks to two-part structure with snap lock

Variants with diameters of 450 and 600 mm can be installed by one person





Suspended mounting with wire suspension set (2 m) or tube suspension set (1 m) as optional accessories (lengths can be shortened)



PRODUCT TYPES



LIGHT DISTRIBUTION



□ C0, □ C90, ■ C0 / C90

Note: Technical data for specific products can be found at www.esylux.com.



- Flat surface-mounted LED lights in diameters of 450, 600 and 900 mm
- High-quality, powder-coated aluminium housing
- DALI-2 variants with fixed light colour for presence and daylight dependent constant light control or with Tunable White (2700 – 6500 K)
- Possible control of the light colour and brightness of DALI-2 DT8 luminaires (TW) using an ESYLUX-specific push-button and a DALI power supply.
- Indirect light component of 35 % improves the impression of the room and makes luminaires appear to float below the ceiling
- Homogeneous, glare-free illumination and long LED service life thanks to flat backlight arrangement and harmonised lenses
- DALI-2 (except Ø 900 mm) and DALI-2 DT8 (TW) variants have the SwitchDIM function
- Simple installation thanks to two-part structure with snap lock
- Variants with diameters of 450 and 600 mm can be installed by one person
- Suspended mounting with wire suspension set (2 m) or tube suspension set (1 m) as optional accessories (lengths can be shortened)

Product group/product name	Item no.	Light colour (IEC 1231)	Luminous flux	Rated output P	Luminous efficacy	Unified Glare Rating	Glare suppression	Diffuser	Protection type	Control system	BT (Bluetooth)	Sensor	Energy efficiency class	Dimensions (mm)	Circuit diagram	Core portfolio	New product
450 mm																	
SVENJA CL 450 DDP OP 3300 830 IP20 (white, similar to RAL 9003)	E010850592	830	3300 lm	30 W	110 lm/W	<19	DDP	OP	IP20	ON/OFF			LED EEI D	X 450, Z 82	BF	•	★
SVENJA CL 450 DDP OP 3300 830 IP20 DALI-2 (white, similar to RAL 9003)	E010850608	830	3300 lm	30 W	110 lm/W	<19	DDP	OP	IP20	DALI-2			LED EEI D	X 450, Z 82	CV	•	★
SVENJA CL 450 DDP OP 3400 840 IP20 (white, similar to RAL 9003)	E010850615	840	3400 lm	30 W	113 lm/W	<19	DDP	OP	IP20	ON/OFF			LED EEI D	X 450, Z 82	BF	•	★
SVENJA CL 450 DDP OP 3400 840 IP20 DALI-2 (white, similar to RAL 9003)	E010850622	840	3400 lm	30 W	113 lm/W	<19	DDP	OP	IP20	DALI-2			LED EEI D	X 450, Z 82	CV	•	★
SVENJA CL 450 DDP OP 3400 8TW IP20 DALI-2 DT8 (white, similar to RAL 9003)	E010850585	8TW	3400 lm	31 W	109 lm/W	<19	DDP	OP	IP20	DALI-2			LED EEI C	X 450, Z 82	CW	•	★
600 mm																	
SVENJA CL 600 DDP OP 5600 830 IP20 DALI-2 (white, similar to RAL 9003)	E010850646	830	5600 lm	46,5 W	120 lm/W	<19	DDP	OP	IP20	DALI-2			LED EEI D	X 600, Z 82	CV	•	★
SVENJA CL 600 DDP OP 5700 840 IP20 DALI-2 (white, similar to RAL 9003)	E010850653	840	5700 lm	46,5 W	122 lm/W	<19	DDP	OP	IP20	DALI-2			LED EEI D	X 600, Z 82	CV	•	★
SVENJA CL 600 DDP OP 5600 8TW IP20 DALI-2 DT8 (white, similar to RAL 9003)	E010850639	8TW	5600 lm	48 W	116 lm/W	<19	DDP	OP	IP20	DALI-2			LED EEI C	X 600, Z 82	CW	•	★
900 mm																	
SVENJA CL 900 DDP OP 9400 830 IP20 DALI-2 (white, similar to RAL 9003)	E010850684	830	9400 lm	80 W	117 lm/W	<19	DDP	OP	IP20	DALI-2			LED EEI D	X 900, Z 87	CV	•	★
SVENJA CL 900 DDP OP 9600 840 IP20 DALI-2 (white, similar to RAL 9003)	E010850660	840	9600 lm	80 W	120 lm/W	<19	DDP	OP	IP20	DALI-2			LED EEI D	X 900, Z 87	CV	•	★
SVENJA CL 900 DDP OP 7000 8TW IP20 DALI-2 DT8 (white, similar to RAL 9003)	E010850677	8TW	7000 lm	60 W	116 lm/W	<19	DDP	OP	IP20	DALI-2			LED EEI C	X 900, Z 87	CW	•	★

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Electrical accessories					
POWER SUPPLY 200mA DALI	EC10430008	200mA power pack for supplying power to DALI operating units or DALI control modules that do not have their own power supply	X 48, Y 45, Z 25	•	
Mounting					
SVENJA POLE PENDULUM SET 1000	EO10850561	Pendulum set with centrally mounted tube, transparent 5-pole connection cable and round ceiling canopy	X 1000	•	★
SVENJA WIRE PENDULUM SET 2000	EO10850578	Pendulum kit with 3 wire cables, transparent 5-pole connection cable and round ceiling canopy	X 2000	•	★
Push button					
PUSH BUTTON x8 TW	EO10431388	DALI Broadcast 8 x push button Tunable White for manual override of luminaires with DALI-2 DT8 drivers	X 71, Y 71, Z 21,5	•	★

BF			Standard operation.
CV			Standard operation DALI/DALI-2.
			Standard operation with optional SwitchDIM (PushDIM) function.
CW			Standard operation DALI/DALI-2.
			Standard operation with optional SwitchDIM (PushDIM) function.

- High-quality aluminium housing with low installation depth
- Variants with a diameter of 225 mm, integrated presence or motion detector, optimised for controlling additional LED lights, remotely controlled
- Sensorless DALI variants with SwitchDIM function for 230 V button

5 YEARS
MANUFACTURER
WARRANTY



With their minimalist design, ELSA-2 downlights are ideally suited as supplement to main lighting or as a stand-alone solution in conference rooms, hallways, staircases, entrance areas and sanitary facilities. Installation requires no additional accessories and the light ensures a harmonious appearance.



Parameterisable with ESY-Pen and ESY-App. More on pages 220 – 221 and at: esylux.com/esy-pen.

ELSA-2

IF REQUIRED: INTELLIGENCE INCLUDED

High-quality aluminium housing with low installation depth

Variants with a diameter of 225 mm with an integrated remotely controlled motion detector or DALI presence detector (DALI broadcast)

Detector optimised for controlling additional LED lights

Available with additional integrated DALI bus power supply

Sensorless DALI variants with SwitchDIM function for 230 V button

Flicker-free light for healthy and fatigue-free working

Installation without additional accessories

Simple plug-in connection of the driver to the light





Protection type IP20/Variants without IP44 sensor under the ceiling (installed)

Rated lifetime $L_{80}B_{50}$ at 25°C: 40000 h




INDOOR LIGHTING

PRODUCT TYPES


			
---	---	--	---

LIGHT DISTRIBUTION



■ C0, ■ C90, ■ C0 / C90

FIELD OF DETECTION



DETECTION RANGE







	Ceiling 8 m
■ Diagonally (A)	Ø 8 m
■ Frontal (B)	Ø 5 m
■ Presence area (C)	Ø 3 m

Note: Technical data for specific products can be found at www.esylux.com.





- High-quality aluminium housing with low installation depth
- Variants with a diameter of 225 mm with an integrated remotely controlled motion detector or DALI presence detector (DALI broadcast)
- Detector optimised for controlling additional LED lights
- Available with additional integrated DALI bus power supply
- Sensorless DALI variants with SwitchDIM function for 230 V button
- Flicker-free light for healthy and fatigue-free working
- Installation without additional accessories
- Simple plug-in connection of the driver to the light
- Protection type IP20/Variants without IP44 sensor under the ceiling (installed)
- Rated lifetime $L_{80}B_{50}$ at 25°C: 40000 h


Product group/product name	Item no.	Light colour (IEC 1231)	Luminous flux	Rated output P	Luminous efficacy	Unified Glare Rating	Glare suppression	Diffuser	Protection type	Control system	BT (Bluetooth)	Sensor	Energy efficiency class	Dimensions (mm)	Circuit diagram	Core portfolio	New product
3000 K / Ø 165 mm / 9 W / 110°																	
ELSA-2 DL 165 OP 110° 900 830 DALI WH (white, similar to RAL 9003)	E010298929	830	900 lm	9,5 W	94 lm/W	≤25	OP	IP44	DALI					X 180, Z 25	BS	•	
ELSA-2 DL 165 OP 110° 900 830 WH (white, similar to RAL 9003)	E010298981	830	900 lm	9 W	100 lm/W	≤25	OP	IP44	ON/OFF					X 180, Z 25	BX	•	
3000 K / Ø 225 mm / 18 W / 110°																	
ELSA-2 DL 225 OP 110° 1800 830 DALI WH (white, similar to RAL 9003)	E010298943	830	1700 lm	19 W	89 lm/W	≤25	OP	IP44	DALI					X 240, Z 25	BS	•	
ELSA-2 DL 225 OP 110° 1800 830 MD IR WH (white, similar to RAL 9003)	E010299025	830	1650 lm	17,5 W	94 lm/W	≤25	OP	IP20	ON/OFF			•		X 240, Z 60	BY	•	
ELSA-2 DL 225 OP 110° 1800 830 PD IR DALI WH (white, similar to RAL 9003)	E010299698	830	1750 lm	19 W	92 lm/W	≤25	OP	IP20	DALI			•		X 240, Z 60	BZ	•	
ELSA-2 DL 225 OP 110° 1800 830 PD IR PS DALI WH (white, similar to RAL 9003)	E010299681	830	1750 lm	19 W	92 lm/W	≤25	OP	IP20	DALI			•		X 240, Z 60	BN	•	
ELSA-2 DL 225 OP 110° 1800 830 WH (white, similar to RAL 9003)	E010299001	830	1700 lm	18 W	94 lm/W	≤25	OP	IP44	ON/OFF					X 240, Z 25	BX	•	
3000 K / Ø 68 mm / 5 W / 100°																	
ELSA-2 DL 68 OP 100° 500 830 DALI WH (white, similar to RAL 9003)	E010298905	830	500 lm	6,5 W	76 lm/W	≤30	OP	IP44	DALI					X 98, Z 45	BS	•	
ELSA-2 DL 68 OP 100° 500 830 WH (white, similar to RAL 9003)	E010298967	830	500 lm	6,5 W	76 lm/W	≤30	OP	IP44	ON/OFF					X 98, Z 45	BX	•	
4000 K / Ø 165 mm / 9 W / 110°																	
ELSA-2 DL 165 OP 110° 900 840 DALI WH (white, similar to RAL 9003)	E010298936	840	900 lm	9,5 W	94 lm/W	≤25	OP	IP44	DALI					X 180, Z 25	BS	•	
ELSA-2 DL 165 OP 110° 900 840 WH (white, similar to RAL 9003)	E010298998	840	850 lm	10,5 W	80 lm/W	≤25	OP	IP44	ON/OFF					X 180, Z 25	BX	•	
4000 K / Ø 225 mm / 18 W / 110°																	
ELSA-2 DL 225 OP 110° 1800 840 DALI WH (white, similar to RAL 9003)	E010298950	840	1800 lm	19 W	94 lm/W	≤25	OP	IP44	DALI					X 240, Z 25	BS	•	

Product group/product name	Item no.	Light colour (IEC 1231)	Luminous flux	Rated output P	Luminous efficacy	Unified Glare Rating	Glare suppression	Diffuser	Protection type	Control system	BT (Bluetooth)	Sensor	Energy efficiency class	Dimensions (mm)	Circuit diagram	Core portfolio	New product
ELSA-2 DL 225 OP 110° 1800 840 MD IR WH (white, similar to RAL 9003)	E010299032	840	1750 lm	18 W	97 lm/W	≤25		OP	IP20	ON/OFF		•		X 240, Z 60	BY	•	
ELSA-2 DL 225 OP 110° 1800 840 PD IR DALI WH (white, similar to RAL 9003)	E010299674	840	1850 lm	19 W	97 lm/W	≤25		OP	IP20	DALI		•		X 240, Z 60	BZ	•	
ELSA-2 DL 225 OP 110° 1800 840 PD IR PS DALI WH (white, similar to RAL 9003)	E010299667	840	1850 lm	19,5 W	94 lm/W	≤25		OP	IP20	DALI		•		X 240, Z 60	BN	•	
ELSA-2 DL 225 OP 110° 1800 840 WH (white, similar to RAL 9003)	E010299018	840	1800 lm	18 W	100 lm/W	≤25		OP	IP44	ON/OFF				X 240, Z 25	BX	•	
4000 K / Ø 68 mm / 5 W / 100°																	
ELSA-2 DL 68 OP 100° 500 840 DALI WH (white, similar to RAL 9003)	E010298912	840	500 lm	6,5 W	76 lm/W	≤30		OP	IP44	DALI				X 98, Z 45	BS	•	
ELSA-2 DL 68 OP 100° 500 840 WH (white, similar to RAL 9003)	E010298974	840	475 lm	6,5 W	73 lm/W	≤30		OP	IP44	ON/OFF				X 98, Z 45	BX	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Adapter					
ELSA-2 RING 165	E010300271	Adapter ring 165 – 200 mm for ELSA-2 series	X 215, Z 1,5	•	
ELSA-2 RING 225	E010300264	Adapter ring 225 – 265 mm for ELSA-2 series	X 280, Z 1,5	•	
ELSA-2 RING 65	E010300288	Adapter ring 65 – 105 mm for ELSA-2 series	X 120, Z 1,5	•	
Electrical accessories					
ACTUATOR FULL AUTO C3 DALI	EP10427473	Modul for the conversion of bus commands from the DALI presence detector and other light controls into switching signals (fully automatic)	X 45, Y 45, Z 24	•	
ACTUATOR SEMI AUTO C4 DALI	EP10427480	Modul for the conversion of bus commands from the DALI presence detector and other light controls into switching signals (semi-automatic)	X 45, Y 45, Z 24	•	
JUNCTION BOX 5-POLE BK	E010430992	Universal junction box, black, 5-pin, 2.5 mm ²	X 103, Y 62, Z 27	•	
POWER SUPPLY 200mA DALI	EC10430008	200mA power pack for supplying power to DALI operating units or DALI control modules that do not have their own power supply	X 48, Y 45, Z 25	•	
Mounting					
ELSA-2 MOUNTING FRAME 165 SM WH	E010300882	Ceiling installation frame for ELSA-2 165 series	X 250, Z 70	•	
ELSA-2 MOUNTING FRAME 225 SM WH	E010300899	Ceiling installation frame for ELSA-2 225 series	X 310, Z 70	•	
Remote control					
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•	
REMOTE CONTROL MDi/PDi	EM10425509	IR remote control for presence detectors and motion detectors	X 100, Y 50, Z 9	•	
REMOTE CONTROL PDi DALI	EP10425899	IR remote control for DALI presence detectors and motion detectors	X 100, Y 50, Z 9	•	


BN		BS	
	Standard operation.		Standard operation.

BX




Standard operation.

BY

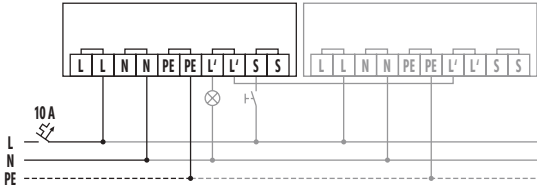

Standard with optional control via a closing button and parallel wiring of max. ten devices.

BZ



Standard operation.



- DALI-2 variants for presence and daylight-dependent constant light control and for orientation light
- Optional integrated HF motion detector
- Particularly resistant: IP66 and IK08

5 YEARS
MANUFACTURER
WARRANTY



Whether in corridors, storage rooms, car parks, carports or cellars: OLIVIA-2 series damp-proof luminaires offer optimally protected light with high energy-saving potential. An optional built-in HF motion detector and excellent luminous efficacy ensure optimum energy efficiency. Sophisticated details such as integrated through-wiring simplify installation, while IP66 protection and IK08 impact resistance ensure long-lasting functionality.

OLIVIA-2

EFFICIENT, ROBUST, INTELLIGENTLY CONTROLLED.


LED moisture-proof luminaires with integrated DALI-2-certified or ON/OFF drivers and ENEC test mark

Motion detectors of the DALI-2 variants serve as input devices for APC presence detectors of the COMPACT series (control up to 16 groups)

Simple group installation thanks to integrated through-wiring with 5 x 2.5 mm² and plug-in terminals on both sides

Outstanding light transmission factor thanks to opal diffuser made of UV-stabilised polycarbonate

High IP66 protection rating thanks to injected silicone-based seal



Optional built-in HF motion detector for motion and daylight-dependent control of a luminaire group


Optionally with safety lighting function with long-life LiFePO4 battery and automatic self-test




Two cable glands for cables up to 5 x 2.5 mm² included

Excellent luminous efficacy of up to 162 lm/W

Tamper-proof stainless steel locking clips (cannot be removed by hand)

PRODUCT TYPES



LIGHT DISTRIBUTION		FIELD OF DETECTION	DETECTION RANGE	
				Ceiling 8 m
			■ Diagonally (A)	Ø 8-9 m
			-	-
			-	-

■ C0, ■ C90, ■ C0 / C90

Note: Technical data for specific products can be found at www.esylux.com.

OLIVIA-2




INDOOR LIGHTING / MOISTURE-PROOF LIGHTS



- LED moisture-proof luminaires with integrated DALI-2-certified or ON/OFF drivers and ENEC test mark
- Optional built-in HF motion detector for motion and daylight-dependent control of a luminaire group
- Motion detectors of the DALI-2 variants serve as input devices for APC presence detectors of the COMPACT series (control up to 16 groups)
- Optionally with safety lighting function with long-life LiFePO4 battery and automatic self-test
- Simple group installation thanks to integrated through-wiring with 5 x 2.5 mm² and plug-in terminals on both sides
- Two cable glands for cables up to 5 x 2.5 mm² included
- Outstanding light transmission factor thanks to opal diffuser made of UV-stabilised polycarbonate
- Excellent luminous efficacy of up to 162 lm/W
- High IP66 protection rating thanks to injected silicone-based seal
- Tamper-proof stainless steel locking clips (cannot be removed by hand)
- Two snap-in and flexibly adjustable brackets for ceiling mounting included
- Reinforced brackets for wall mounting and hangers for suspended mounting as optional accessories

Product group/product name	Item no.	Light colour (IEC 1231)	Luminous flux	Rated output P	Luminous efficacy	Unified Glare Rating	Glare suppression	Diffuser	Protection type	Control system	BT (Bluetooth)	Sensor	Energy efficiency class	Dimensions (mm)	Circuit diagram	Core portfolio	New product
4000 K / 1200 mm / 33 W																	
OLIVIA-2 MPL 1200 OP 5000 840 IP66 (light grey, similar to RAL 7035)	E010310393	840	5000 lm	32 W	156 lm/W	< 25	OP	IP66	ON/OFF				LED EEI C	X 1185, Y 85, Z 86	BF	•	★
OLIVIA-2 MPL 1200 OP 5000 840 IP66 3h 5x2.5 (light grey, similar to RAL 7035)	E010310423	840	5000 lm	36 W	138 lm/W	< 25	OP	IP66	ON/OFF				LED EEI C	X 1185, Y 85, Z 86	DC	•	★
OLIVIA-2 MPL 1200 OP 5000 840 IP66 3h 5x2.5 DALI-2 (light grey, similar to RAL 7035)	E010310386	840	5000 lm	36 W	138 lm/W	< 25	OP	IP66	DALI-2				LED EEI C	X 1185, Y 85, Z 86	BZ	•	★
OLIVIA-2 MPL 1200 OP 5000 840 IP66 5x2.5 (light grey, similar to RAL 7035)	E010310409	840	5000 lm	32 W	156 lm/W	< 25	OP	IP66	ON/OFF				LED EEI C	X 1185, Y 85, Z 86	BF	•	★
OLIVIA-2 MPL 1200 OP 5000 840 IP66 5x2.5 DALI-2 (light grey, similar to RAL 7035)	E010310362	840	5000 lm	33 W	151 lm/W	< 25	OP	IP66	DALI-2				LED EEI C	X 1185, Y 85, Z 86	BZ	•	★
OLIVIA-2 MPL 1200 OP 5000 840 IP66 5x2.5 MD (light grey, similar to RAL 7035)	E010310416	840	5000 lm	33 W	151 lm/W	< 25	OP	IP66	ON/OFF			•	LED EEI C	X 1185, Y 85, Z 86	BF	•	★
OLIVIA-2 MPL 1200 OP 5000 840 IP66 5x2.5 MD DALI-2 (light grey, similar to RAL 7035)	E010310379	840	5000 lm	35 W	142 lm/W	< 25	OP	IP66	DALI-2			•	LED EEI C	X 1185, Y 85, Z 86	BZ	•	★
4000 K / 1500 mm / 44 W																	
OLIVIA-2 MPL 1500 OP 6800 840 IP66 (light grey, similar to RAL 7035)	E010310461	840	6800 lm	42 W	161 lm/W	< 25	OP	IP66	ON/OFF				LED EEI C	X 1477, Y 85, Z 86	BF	•	★
OLIVIA-2 MPL 1500 OP 6800 840 IP66 3h 5x2.5 (light grey, similar to RAL 7035)	E010310492	840	6800 lm	46 W	147 lm/W	< 25	OP	IP66	ON/OFF				LED EEI C	X 1477, Y 85, Z 86	DC	•	★
OLIVIA-2 MPL 1500 OP 6800 840 IP66 3h 5x2.5 DALI-2 (light grey, similar to RAL 7035)	E010310454	840	6800 lm	46 W	147 lm/W	< 25	OP	IP66	DALI-2				LED EEI C	X 1477, Y 85, Z 86	BZ	•	★
OLIVIA-2 MPL 1500 OP 6800 840 IP66 5x2.5 (light grey, similar to RAL 7035)	E010310478	840	6800 lm	42 W	161 lm/W	< 25	OP	IP66	ON/OFF				LED EEI C	X 1477, Y 85, Z 86	BF	•	★
OLIVIA-2 MPL 1500 OP 6800 840 IP66 5x2.5 DALI-2 (light grey, similar to RAL 7035)	E010310430	840	6800 lm	43 W	158 lm/W	< 25	OP	IP66	DALI-2				LED EEI C	X 1477, Y 85, Z 86	BZ	•	★
OLIVIA-2 MPL 1500 OP 6800 840 IP66 5x2.5 MD (light grey, similar to RAL 7035)	E010310485	840	6800 lm	43 W	158 lm/W	< 25	OP	IP66	ON/OFF			•	LED EEI C	X 1477, Y 85, Z 86	BF	•	★
OLIVIA-2 MPL 1500 OP 6800 840 IP66 5x2.5 MD DALI-2 (light grey, similar to RAL 7035)	E010310447	840	6800 lm	45 W	151 lm/W	< 25	OP	IP66	DALI-2			•	LED EEI C	X 1477, Y 85, Z 86	BZ	•	★

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
OLIVIA-2 HANGER BRACKET SET 2x	E010310515	2x stainless steel hangers for suspended mounting. For insertion into the mounting brackets supplied with the OLIVIA-2 moisture-proof luminaires.		•	★
OLIVIA-2 WALL MOUNTING BRACKET SET 2x	E010310508	2x reinforced stainless steel mounting brackets for wall mounting.		•	★

BF		BZ		
	Standard operation.		Standard operation.	
DC				
	Standard operation.			

- Special lens for outstandingly far-reaching illumination

5 YEARS
MANUFACTURER
WARRANTY



The ELH series provides escape route lighting for single-battery operation with a lens construction that is specially designed for extensive areas — either for oval illumination of floors or circular illumination of large rooms. Its larger-than-average range reduces the number of lights required. The integrated DALI interface ensures high levels of control flexibility during operation and convenient maintenance.

ELH

RELIABLY ILLUMINATE EXTENSIVE AREAS

Single-battery 3-h emergency light

Suitable for surface or recessed ceiling mounting

Special lenses for the far-reaching illumination of large rooms (O) or long hallways (C)

Continual load monitoring with automatic weekly function test and six-monthly continuous function test

Test results indicated by coloured status LEDs

Optionally, operation in continuous or standby mode



Includes rechargeable NiCd battery with reverse polarity protected connection

Connection via push terminals with through-wiring option



Optional remote disconnection and status readout function via DALI bus



PRODUCT TYPES



LIGHT DISTRIBUTION



□ C0, □ C90, ■ C0 / C90

Note: Technical data for specific products can be found at www.esylux.com.



- Single-battery 3-h emergency light
- Suitable for surface or recessed ceiling mounting
- Special lenses for the far-reaching illumination of large rooms (O) or long hallways (C)
- Continual load monitoring with automatic weekly function test and six-monthly continuous function test
- Test results indicated by coloured status LEDs
- Optionally, operation in continuous or standby mode
- Includes rechargeable NiCd battery with reverse polarity protected connection
- Connection via push terminals with through-wiring option
- Optional remote disconnection and status readout function via DALI bus

Product group/product name	Item no.	Installation position	Installation type	Light duration	Viewing distance	Luminous flux	Rated output P	Luminous efficacy	Lamp holder	DALI	Automatic testing	Battery	Dimensions (mm)	Circuit diagram	Core portfolio	New product
3 h / Corridor																
ELH EL LED 3h SC RM CORRIDOR (white, similar to RAL 9016)	EN10080012	Ceiling	RM	3 h		155 lm	4 W	38 lm/W		•	•	NiCd	X 55, Z 45	CB	•	
ELH EL LED 3h SC SM CORRIDOR (white, similar to RAL 9016)	EN10080005	Ceiling	SM	3 h		155 lm	4 W	38 lm/W		•	•	NiCd	X 190, Y 190, Z 44	CA	•	
3 h / Office																
ELH EL LED 3h SC RM OFFICE (white, similar to RAL 9016)	EN10080029	Ceiling	RM	3 h		155 lm	4 W	38 lm/W		•	•	NiCd	X 55, Z 45	CB	•	
ELH EL LED 3h SC SM OFFICE (white, similar to RAL 9016)	EN10080036	Ceiling	SM	3 h		155 lm	4 W	38 lm/W		•	•	NiCd	X 190, Y 190, Z 44	CA	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Spare parts					
Battery					
ELH FM BATTERY 2000mAh	EN00007361	Battery for ELH series, 2000 mAh, built-in version	X 37, Z 210	•	
ELH SM BATTERY NiCd 2000mAh	EN00007378	Battery for ELH series, 2000 mAh, surface-mounted version	X 25, Z 170	•	

CA		Standard operation.	CB		Standard operation.



- Large wiring area with numerous line feeds

5 YEARS
MANUFACTURER
WARRANTY



With the same basic housing, the ELX series LED emergency lights supplement the escape route signage in the SLX series with a reliable, energy-efficient escape route light. In addition to the large illumination area, they impress with their versatile installation options and easy installation. Designs for systems with single-battery or central battery operation are available.



Parameterisable with ESY-Pen and ESY-App. More on pages 220 – 221 and at: esylux.com/esy-pen.

ELX

IMPROVED SAFETY EASILY INSTALLED

Single-battery emergency light for escape route lighting with 3-hour or 8-hour emergency light duration

Basic housing made from UV-stabilised plastic with large wiring area and line feeds from several directions

Self-monitoring with coloured status indicator

Tamper-resistant function check can be executed by remote control or magnet

Optionally, operation in continuous or stand-by mode possible

Plug-in terminal with through-wiring function

Continual load monitoring with automatic weekly function test and six-monthly continuous function test

Test results shown on coloured status display


Wide range of accessories available for a variety of installation types

Replaceable, rechargeable NiCd battery with plug-in connection protected against reverse polarity




INDOOR LIGHTING

PRODUCT TYPES



LIGHT DISTRIBUTION



□ C0, □ C90, ■ C0 / C90

Note: Technical data for specific products can be found at www.esylux.com.





- Single-battery emergency light for escape route lighting with 3-hour or 8-hour emergency light duration
- Basic housing made from UV-stabilised plastic with large wiring area and line feeds from several directions
- Self-monitoring with coloured status indicator
- Tamper-resistant function check can be executed by remote control or magnet
- Optionally, operation in continuous or stand-by mode possible
- Plug-in terminal with through-wiring function
- Continual load monitoring with automatic weekly function test and six-monthly continuous function test
- Test results shown on coloured status display
- Wide range of accessories available for a variety of installation types
- Replaceable, rechargeable NiCd battery with plug-in connection protected against reverse polarity
- Variant (CPS) for connecting to a central, uninterruptible power supply (24 V – 230 V AC/DC)

Product group/product name	Item no.	Installation position	Installation type	Light duration	Viewing distance	Luminous flux	Rated output P	Luminous efficacy	Lamp holder	DALI	Automatic testing	Battery	Dimensions (mm)	Circuit diagram	Core portfolio	New product
3 h / ELX																
ELX EL LED 3h IR SM (white, similar to RAL 9016)	EN10077227	Ceiling / wall	SM	3 h		186 lm	3 W	62 lm/W				NiCd	X 388, Y 148, Z 46	BX	•	
8 h / ELX																
ELX EL LED 8h IR SM (white, similar to RAL 9016)	EN10077340	Ceiling / wall	SM	8 h		60 lm	3 W	20 lm/W				NiCd	X 388, Y 148, Z 46	BX	•	
CPS / ELX																
ELX EL LED CPS SM (white, similar to RAL 9016)	EN10077067	Ceiling / wall	SM			200 lm	3 W	66 lm/W					X 388, Y 148, Z 46	CC	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Mounting					
SLX/ELX MOUNTING FRAME 430 FM	EN10077234	Installation frame for SLX and ELX series, installation hole size 430 x 155 mm	X 469, Y 229, Z 36	•	
SLX/ELX TUBE PENDULUM SET	EN10078316	Conduit pendulum set for SLX and ELX series	X 530	•	
SLX/ELX WALL BRACKET 110	EN10077289	Wall bracket mounting for SLX and ELX series, 110 mm length	X 112, Y 35, Z 55	•	
Protection					
SLX/ELX BASKET GUARD WALL	EN10077265	Basket guard for SLX and ELX series, 80 mm high	X 440, Y 230, Z 80	•	
Remote control					
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•	
SL REMOTE CONTROL	EN10017704	IR remote control for emergency lights	X 56, Y 29, Z 7	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Spare parts					
Battery					
ELX BATTERY NiCd 1800mAh	EN10077418	NiCd rechargeable battery (3.6V/1800 mAh) for ELX series with reverse polarity protected plug-in connection	X 130, Y 24, Z 24	•	

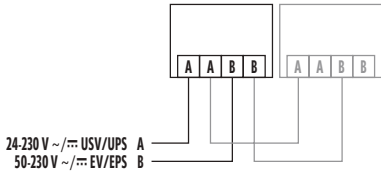BX		CC	
	Standard operation.		Standard operation with optional series connection to other emergency lights.

- Can be switched off remotely when not in use

5 YEARS
MANUFACTURER
WARRANTY



The single-battery emergency lights in the SLG series are a classic, discreet solution for escape route lighting. The simple function test takes place using the test key or remote control; the remote control connection enables the emergency light feature to be temporarily disabled.



Parameterisable with ESY-Pen and ESY-App. More on pages 220 - 221 and at: esylux.com/esy-pen.

SLG

UNOBTRUSIVE, SAFE, CAN BE SWITCHED OFF REMOTELY

Single-battery 3 h emergency light

Suitable for recessed ceiling mounting

Self-control (SC) and fail-safe contact (opens in event of fault)

Additional remote control connection (F+, F-) for disabling emergency lighting when building is not in use

Function test and self-control feature can be enabled using conventional test key or conveniently using the SL REMOTE CONTROL

Continual load monitoring with automatic weekly function test and six-monthly continuous function test

Test results indicated by coloured status LEDs

Operation either in continuous or standby mode


Includes rechargeable NiMh battery with reverse polarity protected connection

Connection via plug-in terminals




INDOOR LIGHTING

PRODUCT TYPES



LIGHT DISTRIBUTION



□ C0, □ C90, ■ C0 / C90


Note: Technical data for specific products can be found at www.esylux.com.



- Single-battery 3 h emergency light
- Suitable for recessed ceiling mounting
- Self-control (SC) and fail-safe contact (opens in event of fault)
- Additional remote control connection (F+, F-) for disabling emergency lighting when building is not in use
- Function test and self-control feature can be enabled using conventional test key or conveniently using the SL REMOTE CONTROL
- Continual load monitoring with automatic weekly function test and six-monthly continuous function test
- Test results indicated by coloured status LEDs
- Operation either in continuous or standby mode
- Includes rechargeable NiMH battery with reverse polarity protected connection
- Connection via plug-in terminals

Product group/product name	Item no.	Installation position	Installation type	Light duration	Viewing distance	Luminous flux	Rated output P	Luminous efficacy	Lamp holder	DALI	Automatic testing	Battery	Dimensions (mm)	Circuit diagram	Core portfolio	New product
3 h / SLG																
SLG EL LED 3h IR RM (white, similar to RAL 9010)	EN10061301	Ceiling	RM	3 h		100 lm	4 W	25 lm/W				NiMH	X 90, Z 37	CE	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Mounting					
SLG BRACKET SET	EN10061318	Mounting set for SLG series	X 180, Y 55, Z 42	•	
Remote control					
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•	
SL REMOTE CONTROL	EN10017704	IR remote control for emergency lights	X 56, Y 29, Z 7	•	

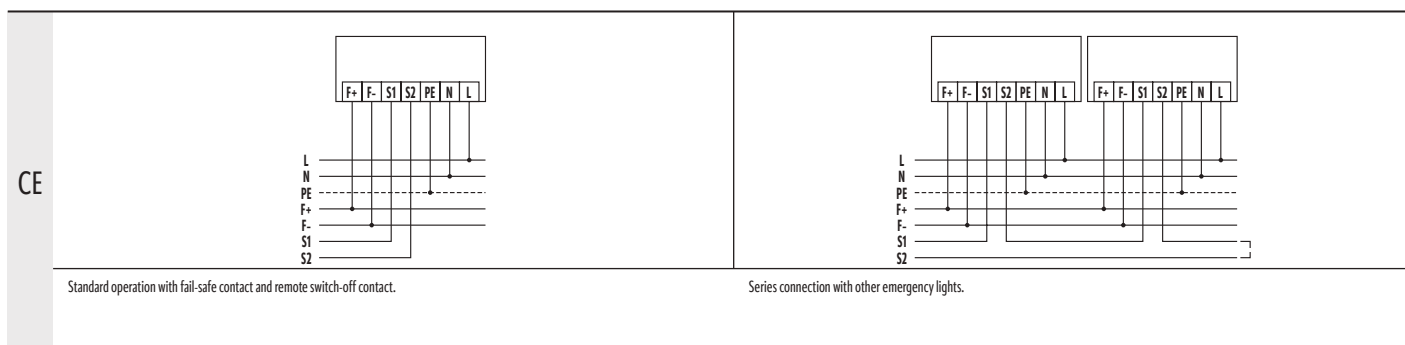



- Function control via remote control possible
- Flexible wall or ceiling mounting without accessories
- Variants with self-control are available



The single-battery emergency lights in the SLA series are a conventional emergency sign solution with a viewing distance of 14 metres. Either the test button or remote control can be used for simple function testing, with LED versions with self-control also available. An accessory basket guard enhances safety for ceiling mounting, whilst the additional downwards light emission ensures better orientation in an emergency.



Parameterisable with ESY-Pen and ESY-App. More on pages 220 - 221 and at: esylux.com/esy-pen.

SLA

REMOTELY CONTROLLED, COMPACT EMERGENCY LIGHT FOR VARIOUS AREAS OF APPLICATION

Single-battery emergency light with 3 h or 8 h emergency light duration
and 14 m detection range

Suitable for wall and ceiling mounting

Including lamp and symbol sheets (depending on variant)

Simple function test using conventional test key or convenient ESY-Pen and
ESY-App or SL REMOTE CONTROL remote control; LED status indicator

Continuous and standby mode

LED variants with self-control

Additional downwards light emission for better orientation in case of emergency


Includes rechargeable battery with reverse polarity protected connection

Connection via push terminals

Rear or side line entrance with elastic sealing membranes



PRODUCT TYPES





- Single-battery emergency light with 3 h or 8 h emergency light duration and 14 m detection range
- Suitable for wall and ceiling mounting
- Including lamp and symbol sheets (depending on variant)
- Simple function test using conventional test key or convenient ESY-Pen and ESY-App or SL REMOTE CONTROL remote control; LED status indicator
- Continuous and standby mode
- LED variants with self-control
- Additional downwards light emission for better orientation in case of emergency
- Includes rechargeable battery with reverse polarity protected connection
- Connection via push terminals
- Rear or side line entrance with elastic sealing membranes

Product group/product name	Item no.	Installation position	Installation type	Light duration	Viewing distance	Luminous flux	Rated output P	Luminous efficacy	Lamp holder	DALI	Automatic testing	Battery	Dimensions (mm)	Circuit diagram	Core portfolio	New product
14 m / SLA																
SLA EL LED 3h 14m IR SC SM (white, similar to RAL 9003)	EN10017551	Ceiling / wall	SM	3 h	14 m		3 W					• LiFePO ₄	X 355, Y 90, Z 115	BR	•	
SLA EL LED 8h 14m IR SC SM (white, similar to RAL 9003)	EN10032660	Ceiling / wall	SM	8 h	14 m		3 W					• LiFePO ₄	X 355, Y 90, Z 115	BR	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Protection					
SLA 14 BASKET GUARD	EN10017841	Basket guard for SLA series with normal unit (14 m)	X 410, Y 140, Z 140	•	
Remote control					
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•	
SL REMOTE CONTROL	EN10017704	IR remote control for emergency lights	X 56, Y 29, Z 7	•	
Symbol					
SLA 14 SYMBOL SET 2	EN10032707	Symbol set for SLA series, 14 m, detection range, up right, up left, down right, down left	X 310, Z 70	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Spare parts					
Battery					
SLA/SLB BATTERY LiFePO4 1500mAh	EN10032721	Spare battery for emergency lights of the SLA and SLB series, revised from 2022 with LiFePO4 rechargeable battery	X 18, Z 65	•	
Symbol					
SLA 14 SYMBOL SET 1	EN10032769	Symbol set for SLA series, 14 m detection range, arrow right, left, upwards and downwards	X 310, Z 70	•	

BR

Standard operation.

- Flexible wall or ceiling mounting without accessories



The single-battery emergency lights in the SLB series are a conventional solution for locations that require a viewing distance of 21 metres. Their function can be tested easily using the test button and the push terminals enable fast and easy wall or ceiling mounting. Additional downwards light emission ensures better orientation in an emergency.

SLB

ROBUST, EASY-TO-USE EMERGENCY LIGHT

Single-battery emergency light with 3 hour or 8 hour emergency light duration and 21 m viewing distance

Suitable for wall and ceiling mounting

Includes light source and symbol-sheets

Simple standard function test with test key, LED status indicator

Continuous and standby mode


Additional light distribution below for better orientation in an emergency

Includes rechargeable battery with reverse polarity protected connection

Connection via push terminals

Line entrance on the back or side with elastic sealing membranes

PRODUCT TYPES



Note: Technical data for specific products can be found at www.esylux.com.




- Single-battery emergency light with 3 hour or 8 hour emergency light duration and 21 m viewing distance
- Suitable for wall and ceiling mounting
- Includes light source and symbol-sheets
- Simple standard function test with test key, LED status indicator
- Continuous and standby mode
- Additional light distribution below for better orientation in an emergency
- Includes rechargeable battery with reverse polarity protected connection
- Connection via push terminals
- Line entrance on the back or side with elastic sealing membranes

Product group/product name	Item no.	Installation position	Installation type	Light duration	Viewing distance	Luminous flux	Rated output P	Luminous efficacy	Lamp holder	DALI	Automatic testing	Battery	Dimensions (mm)	Circuit diagram	Core portfolio	New product
21 m / SLB																
SLB EL LED 3h 21m SM (white, similar to RAL 9003)	EN10026836	Ceiling / wall	SM	3 h	21 m		3 W					LiFePO ₄	X 250, Y 150, Z 135	BR	•	
SLB EL LED 8h 21m SM (white, similar to RAL 9003)	EN10032677	Ceiling / wall	SM	8 h	21 m		3 W					LiFePO ₄	X 250, Y 150, Z 135	BR	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Protection					
SLB 21 BASKET GUARD	EN10027062	Basket guard for SLB series	X 310, Y 185, Z 190	•	
Symbol					
SLB 21 SYMBOL SET 2	EN10032738	Symbol set for SLB series, 21 m, detection range, up right, up left, down right, down left	X 210, Z 105	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Spare parts					
Battery					
SLA/SLB BATTERY LiFePO ₄ 1500mAh	EN10032721	Spare battery for emergency lights of the SLA and SLB series, revised from 2022 with LiFePO ₄ rechargeable battery	X 18, Z 65	•	
Symbol					
SLB 21 SYMBOL SET 1	EN10032783	Symbol set for SLB series, 21 m, detection range, right, left, up, down	X 210, Z 105	•	

BR



Standard operation.

- Functional, high-quality and discreet design for diverse installation types
- Function control via remote control and self-control possible
- Can be switched off remotely when not in use

5 YEARS
MANUFACTURER
WARRANTY



ESY
CONTROL



When sophisticated interior design demands discreetly designed escape route signage, design and functionality can be brought into perfect harmony with the SLC/SLD single-battery emergency lights. A wide range of variants enable flexible use — and are already preconfigured for various installation types.




Parameterisable with ESY-Pen and ESY-App. More on pages 220 – 221 and at: esylux.com/esy-pen.

HIGHEST LEVELS OF SAFETY IN HIGH-QUALITY DESIGN

Includes rechargeable battery with reverse polarity protected connection



A diagram of a rectangular box. The top edge is a solid black line. The bottom, left, and right edges are dashed black lines. Below the dashed bottom edge, there is a horizontal dimension line with arrows at both ends, labeled with the letter X .



SLC/SLD / EMERGENCY LIGHTS 127

SLC/SLD

INDOOR LIGHTING / EMERGENCY LIGHTS



- Single-battery emergency light with 3 hour emergency light duration and 25 m (SLC) or 32 m (SLD) detection range
- Variants for wall, wall arm, pendulum, surface ceiling and ceiling flush mounting
- Self-control (SC) and fail-safe contact (opens in event of fault)
- Additional remote control connection (F+, F-) for disabling emergency lighting when building is not in use
- Includes illuminant (LEDs)
- Function test and self-control feature can be enabled using conventional test key or conveniently using the ESY-Pen or SL REMOTE CONTROL
- Continual load monitoring with automatic weekly function test and annual continuous function test
- Test results indicated by coloured LEDs (green/red)
- Continuous and standby mode
- Includes rechargeable battery with reverse polarity protected connection
- Connection via push terminals
- Exclusive symbol

Product group/product name	Item no.	Installation position	Installation type	Light duration	Viewing distance	Luminous flux	Rated output P	Luminous efficacy	Lamp holder	DALI	Automatic testing	Battery	Dimensions (mm)	Circuit diagram	Core portfolio	New product
25 m / SLC																
SLC EL LED 3h 25m IR SC/C PM (aluminium)	EN10031595	Ceiling	PM		25 m		3 W				•	LiFePO ₄	X 300, Y 55, Z 575	CE	•	★
SLC EL LED 3h 25m IR SC/C RM (white, similar to RAL 9010)	EN10031601	Ceiling	RM		25 m		3 W				•	LiFePO ₄	X 355, Y 115, Z 215	CE	•	★
SLC EL LED 3h 25m IR SC/C SM (aluminium)	EN10031618	Ceiling	SM		25 m		3 W				•	LiFePO ₄	X 300, Y 55, Z 235	CE	•	★
SLC EL LED 3h 25m IR SC/C WBM (aluminium)	EN10031632	Wall bracket	SM		25 m		3 W				•	LiFePO ₄	X 315, Y 55, Z 235	CE	•	★
SLC EL LED 3h 25m IR SC/C WM (aluminium)	EN10031625	Wall	SM		25 m		3 W				•	LiFePO ₄	X 300, Y 67, Z 235	CE	•	★
32 m / SLD																
SLD EL LED 3h 32m IR SC/C PM (aluminium)	EN10031649	Ceiling	PM		32 m		3 W				•	LiFePO ₄	X 360, Y 55, Z 605	CE	•	★
SLD EL LED 3h 32m IR SC/C RM (white, similar to RAL 9010)	EN10031656	Ceiling	RM		32 m		3 W				•	LiFePO ₄	X 425, Y 115, Z 245	CE	•	★
SLD EL LED 3h 32m IR SC/C SM (aluminium)	EN10031663	Ceiling	SM		32 m		3 W				•	LiFePO ₄	X 360, Y 55, Z 270	CE	•	★
SLD EL LED 3h 32m IR SC/C WBM (aluminium)	EN10031687	Wall bracket	SM		32 m		3 W				•	LiFePO ₄	X 375, Y 55, Z 270	CE	•	★
SLD EL LED 3h 32m IR SC/C WM (aluminium)	EN10031670	Wall	SM		32 m		3 W				•	LiFePO ₄	X 360, Y 67, Z 270	CE	•	★

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Remote control					
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•	
SL REMOTE CONTROL	EN10017704	IR remote control for emergency lights	X 56, Y 29, Z 7	•	
Symbol					
SLC SYMBOL SET ALTERNATIVE	EN10031694	Alternative symbol set with 25 m detection range for single-battery emergency lights from the SLC series Six symbols (up (both sides), down left, down right, up left, up right), including mounting material	X 290, Y 145, Z 10	•	★
SLD SYMBOL SET ALTERNATIVE	EN10031700	Alternative symbol set with 32 m detection range for single-battery emergency lights from the SLD series. Six symbols (up (both sides), down left, down right, up left, up right), including mounting material.	X 350, Y 175, Z 10	•	★

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Spare parts					
Battery					
SLC/SLD BATTERY LiFePO4 1500mAh	EN10433054	Spare battery for emergency lights of the SLC and SLD series, revised from 2022 with LiFePO4 rechargeable battery	X 19, Z 68	•	★

CE

Standard operation with fail-safe contact and remote switch-off contact.

Series connection with other emergency lights.

- Dual function as escape route signage and emergency lighting
- Function test possible by remote control possible
- Can be switched off remotely when not in use

5 YEARS
MANUFACTURER
WARRANTY



The SLE/SLF series single-battery emergency lights are a classic solution for escape route signage where an optional emergency light duration of eight hours is also required in addition to the appropriate detection range. The simple function test takes place using the test key or remote control. A wide range of accessories enable use and easy installation in all common environments.



Parameterisable with ESY-Pen and ESY-App. More on pages 220 – 221 and at: esylux.com/esy-pen.

SLE/SLF

FLEXIBLE DUAL-FUNCTION EMERGENCY LIGHTING

Single-battery emergency light with 3-hour/8-hour emergency light duration and 23-m (SLE) or 30-m (SLF) detection range

Dual function as escape route signage and emergency lighting

3 h mode uses the symbol illumination and downlight function / 8 h mode uses the symbol illumination in emergency mode

Variants for wall and surface ceiling mounting

Self-control (SC) and fail-safe contact (opens in event of fault)

Additional remote control connection (F+, F-) for disabling emergency lighting when building is not in use


Includes illuminant (LEDs)

Function test and self-control feature can be enabled using a conventional test key or using the convenient SL REMOTE CONTROL

Continual load monitoring with automatic weekly function test and annual continuous function test

Test results indicated by coloured LEDs (green/red)

PRODUCT TYPES

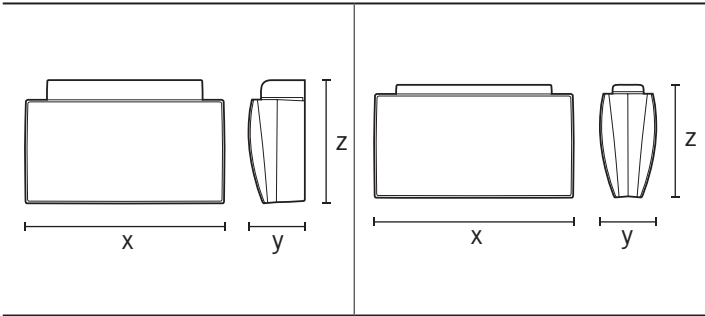

Note: Technical data for specific products can be found at www.esylux.com.

SLE/SLF

INDOOR LIGHTING / EMERGENCY LIGHTS



- Single-battery emergency light with 3-hour/8-hour emergency light duration and 23-m (SLE) or 30-m (SLF) detection range
- Dual function as escape route signage and emergency lighting
- 3 h mode uses the symbol illumination and downlight function / 8 h mode uses the symbol illumination in emergency mode
- Variants for wall and surface ceiling mounting
- Self-control (SC) and fail-safe contact (opens in event of fault)
- Additional remote control connection (F+, F-) for disabling emergency lighting when building is not in use
- Includes illuminant (LEDs)
- Function test and self-control feature can be enabled using a conventional test key or using the convenient SL REMOTE CONTROL
- Continual load monitoring with automatic weekly function test and annual continuous function test
- Test results indicated by coloured LEDs (green/red)
- Continuous and standby mode
- Includes rechargeable battery with reverse polarity protected connection
- Connection via push terminals

Product group/product name	Item no.	Installation position	Installation type	Light duration	Viewing distance	Luminous flux	Rated output P	Luminous efficacy	Lamp holder	DALI	Automatic testing	Battery	Dimensions (mm)	Circuit diagram	Core portfolio	New product
23 m / SLE																
SLE EL LED 3h/8h 23m IR SC/C SM (white, similar to RAL 9003)	EN10061813	Ceiling	SM	3 h	23 m	65 lm	4 W	16 lm/W			•	LiFePO ₄ X 245, Y 67, Z 138		CF	•	
SLE EL LED 3h/8h 23m IR SC/C WM (white, similar to RAL 9003)	EN10061806	Wall	SM	3 h	23 m	65 lm	4,5 W	14 lm/W			•	LiFePO ₄ X 245, Y 70, Z 147		CF	•	
30 m / SLF																
SLF EL LED 3h/8h 30m IR SC/C SM (white, similar to RAL 9003)	EN10061837	Ceiling	SM	3 h	30 m	65 lm	5 W	13 lm/W			•	LiFePO ₄ X 306, Y 72, Z 170		CF	•	
SLF EL LED 3h/8h 30m IR SC/C WM (white, similar to RAL 9003)	EN10061820	Wall	SM	3 h	30 m	65 lm	5 W	13 lm/W			•	LiFePO ₄ X 306, Y 75, Z 184		CF	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Mounting					
SLE WALL ARM	EN10060335	Wall arm for SLE series	X 262, Y 108, Z 45	•	
Protection					
SLE 24 BASKET GUARD WALL	EN10017995	Basket guard for SLE series, 100 mm high	X 290, Y 205, Z 105	•	
SLF 30 BASKET GUARD WALL	EN10017971	Basket guard for SLF series, 100 mm high	X 360, Y 250, Z 105	•	
Remote control					
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•	
SL REMOTE CONTROL	EN10017704	IR remote control for emergency lights	X 56, Y 29, Z 7	•	
Symbol					
SLE 23 SYMBOL SET 2	EN10032752	Symbol set for SLE series, 23 m, detection range right upwards, left upwards, right downwards, left downwards		•	★
SLF 30 SYMBOL SET 2	EN10032806	Symbol set for SLE series, 30 m, detection range right upwards, left upwards, right downwards, left downwards		•	★

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Spare parts					
Battery					
SLE/SLF BATTERY LiFePO4 1500mAh	EN1007784	Spare battery for emergency lights of the SLE and SLF series, revised from 2022 with LiFePO4 rechargeable battery	X 18, Z 67	•	★
Symbol					
SLE 23 SYMBOL SET 1	EN10032745	Symbol set (23-m viewing distance) for single-battery emergency lights of the SLE series (arrows: right, left, up, 2x down and blank white)		•	★
SLF 30 SYMBOL SET 1	EN10032790	Symbol set (30-m viewing distance) for single-battery emergency lights from the SLE series (arrows: right, left, up, 2x down and blank white)		•	★

CF

Standard operation with fail-safe contact and remote switch-off contact.

Series connection with other emergency lights.

- Functional design for diverse installation types
- Can be switched off remotely when not in use
- Function control via remote control possible

5 YEARS
MANUFACTURER
WARRANTY



The SLX series emergency lights provide variable LED solutions for indicating escape routes. Whether a classic, robust design, a modern, discreet design or a slim body especially for wall mounting: Due to the modular design concept, there is the right design for almost every requirement for the shared basic housing.





Parameterisable with ESY-Pen and ESY-App. More on pages 220 – 221 and at: esylux.com/esy-pen.

MODULAR CONCEPT WITH EASY INSTALLATION

Continuous and standby mode



PRODUCT TYPES



SLX / EMERGENCY LIGHTS 135



- Single-battery emergency light with 3-hour emergency light duration and 14-m, 24-m or 32-m detection range
- Variants for wall mounting and surface mounting on ceilings
- Basic housing made from UV-stabilised plastic with large wiring area and line feeds from several directions
- Three attachment options: flat cover, display panel or High Cover
- Self-control (SC)
- Includes illuminant (LEDs)
- Function test and self-control feature can be enabled using a conventional magnet or using the convenient SL REMOTE CONTROL
- Continual load monitoring with automatic weekly function test and annual continuous function test
- Test results indicated by coloured LEDs (green/red)
- Continuous and standby mode
- Includes rechargeable NiCd battery with reverse polarity protected connection
- Connection via push terminals with through-wiring option

Product group/product name	Item no.	Installation position	Installation type	Light duration	Viewing distance	Luminous flux	Rated output P	Luminous efficacy	Lamp holder	DALI	Automatic testing	Battery	Dimensions (mm)	Circuit diagram	Core portfolio	New product
14 m / Flat																
SLX EL LED FLAT COVER 3h 14m IR WM (white, similar to RAL 9016)	EN10077609	Wall	SM	3 h	14 m		3 W					NiCd	X 328, Y 108, Z 46	CG	•	
24 m / Display																
SLX EL LED DISPLAY 3h 24m IR SM (white, similar to RAL 9016)	EN10077371	Ceiling / wall	SM	3 h	24 m		3 W					NiCd	X 328, Y 108, Z 195		•	
24 m / Flat																
SLX EL LED FLAT COVER 3h 24m IR WM (white, similar to RAL 9016)	EN10077241	Wall	SM	3 h	24 m		3 W					NiCd	X 388, Y 148, Z 46	CG	•	
24 m / High Cover																
SLX EL LED HIGH COVER 3h 24m IR SM (white, similar to RAL 9016)	EN10077357	Ceiling / wall	SM	3 h	24 m		3 W					NiCd	X 328, Y 108, Z 206	CG	•	
32 m / Display																
SLX EL LED DISPLAY 3h 32m IR SM (white, similar to RAL 9016)	EN10077210	Ceiling / wall	SM	3 h	32 m		3 W					NiCd	X 388, Y 148, Z 223		•	
32 m / High Cover																
SLX EL LED HIGH COVER 3h 32m IR SM (white, similar to RAL 9016)	EN10077203	Ceiling / wall	SM	3 h	32 m		3 W					NiCd	X 388, Y 148, Z 231	CG	•	


Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Mounting					
SLX MOUNTING FRAME 370 FM	EN10077104	Installation frame for SLX and ELX series, installation hole size 370 x 155 mm	X 409, Y 189, Z 36	•	
SLX/ELX MOUNTING FRAME 430 FM	EN10077234	Installation frame for SLX and ELX series, installation hole size 430 x 155 mm	X 469, Y 229, Z 36	•	
SLX/ELX TUBE PENDULUM SET	EN10078316	Conduit pendulum set for SLX and ELX series	X 530	•	
SLX/ELX WALL BRACKET 110	EN10077289	Wall bracket mounting for SLX and ELX series, 110 mm length	X 112, Y 35, Z 55	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Protection					
SLX/ELX BASKET GUARD CEILING	EN10077296	Basket guard for SLX and ELX series, 260 mm high	X 440, Y 230, Z 260	•	
SLX/ELX BASKET GUARD WALL	EN10077265	Basket guard for SLX and ELX series, 80 mm high	X 440, Y 230, Z 80	•	
Remote control					
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•	
SL REMOTE CONTROL	EN10017704	IR remote control for emergency lights	X 56, Y 29, Z 7	•	
Symbol					
SLX 14 FLAT SYMBOL SET II	EN10077135	Symbol set for SLX series, FLAT, 14 m detection range right upwards, left upwards, right downwards, left downwards	X 310, Y 90, Z 0,5	•	
SLX 24 DISPLAY SYMBOL 1-SIDE DOWN	EN10079078	One-sided pictograph panel with 24 m detection range	X 289, Y 155, Z 10	•	
SLX 24 DISPLAY SYMBOL 1-SIDE LEFT	EN10079061	One-sided pictograph panel with 24 m detection range	X 289, Y 155, Z 10	•	
SLX 24 DISPLAY SYMBOL 1-SIDE RIGHT	EN10079054	One-sided pictograph panel with 24 m detection range	X 289, Y 155, Z 10	•	
SLX 24 DISPLAY SYMBOL 1-SIDE TOP	EN10032547	One-sided pictograph panel with 24 m detection range	X 289, Y 155, Z 10	•	
SLX 24 DISPLAY SYMBOL 2-SIDE DOWN	EN10079085	Two-sided pictograph panel with 24 m detection range	X 289, Y 155, Z 10	•	
SLX 24 DISPLAY SYMBOL 2-SIDE DOWN RIGHT LEFT	EN10032578	Two-sided pictograph panel with 24 m detection range	X 289, Y 155, Z 10	•	
SLX 24 DISPLAY SYMBOL 2-SIDE RIGHT LEFT	EN10079092	Two-sided pictograph panel with 24 m detection range	X 289, Y 155, Z 10	•	
SLX 24 DISPLAY SYMBOL 2-SIDE TOP	EN10032554	Two-sided pictograph panel with 24 m detection range	X 289, Y 155, Z 10	•	
SLX 24 DISPLAY SYMBOL 2-SIDE TOP RIGHT LEFT	EN10032561	Two-sided pictograph panel with 24 m detection range	X 289, Y 155, Z 10	•	
SLX 24 FLAT SYMBOL SET II	EN10077517	Symbol set for SLX series, FLAT, 24 m detection range right upwards, left upwards, right downwards, left downwards	X 370, Y 130, Z 0,5	•	
SLX 24 HIGH COVER SYMBOL SET II	EN10077159	Symbol set for SLX series, High Cover, 24 m, detection range right upwards, left upwards, right downwards, left downwards	X 240, Y 120, Z 0,5	•	
SLX 32 DISPLAY SYMBOL 1-SIDE DOWN	EN10079023	One-sided pictogram panel with 32 m detection range	X 350, Y 190, Z 10	•	
SLX 32 DISPLAY SYMBOL 1-SIDE LEFT	EN10079016	One-sided pictogram panel with 32 m detection range	X 350, Y 190, Z 10	•	
SLX 32 DISPLAY SYMBOL 1-SIDE RIGHT	EN10079009	One-sided pictogram panel with 32 m detection range	X 350, Y 190, Z 10	•	
SLX 32 DISPLAY SYMBOL 1-SIDE TOP	EN10032509	One-sided pictogram panel with 32 m detection range	X 350, Y 190, Z 10	•	
SLX 32 DISPLAY SYMBOL 2-SIDE DOWN	EN10079030	Two-sided pictograph panel with 32 m detection range	X 350, Y 190, Z 10	•	
SLX 32 DISPLAY SYMBOL 2-SIDE DOWN RIGHT LEFT	EN10032530	Two-sided pictogram panel with 32 m detection range	X 350, Y 190, Z 10	•	
SLX 32 DISPLAY SYMBOL 2-SIDE RIGHT LEFT	EN10079047	Two-sided pictograph panel with 32 m detection range	X 350, Y 190, Z 10	•	
SLX 32 DISPLAY SYMBOL 2-SIDE TOP	EN10032516	Two-sided pictogram panel with 32 m detection range	X 350, Y 190, Z 10	•	
SLX 32 DISPLAY SYMBOL 2-SIDE TOP RIGHT LEFT	EN10032523	Two-sided pictogram panel with 32 m detection range	X 350, Y 190, Z 10	•	
SLX 32 HIGH COVER SYMBOL SET II	EN10077531	Symbol set for SLX series, High Cover, 32 m, detection range right upwards, left upwards, right downwards, left downwards	X 320, Y 160, Z 0,5	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Spare parts					
Battery					
SLX BATTERY NiCd 800mAh	EN10077401	NiCd rechargeable battery (3.6V/800 mAh) for SLX series with reverse polarity protected plug-in connection	X 153, Y 15, Z 15	•	
Symbol					
SLX 14 FLAT SYMBOL SET I	EN10077128	Symbol set for SLX series, FLAT, 14 m detection range right, left, upwards, downwards	X 310, Y 90, Z 0,5	•	
SLX 24 FLAT SYMBOL SET I	EN10077500	Symbol set for SLX series, FLAT, 24 m detection range right, left, upwards, downwards	X 370, Y 130, Z 0,5	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
SLX 24 HIGH COVER SYMBOL SET I	EN10077142	Symbol set for SLX series, High Cover, 24 m detection range right, left, upwards, downwards	X 240, Y 120, Z 0,5	•	
SLX 32 HIGH COVER SYMBOL SET I	EN10077524	Symbol set for SLX series, High Cover, 32 m detection range right, left, upwards, downwards	X 320, Y 160, Z 0,5	•	

CG



Standard operation.



- Portable spotlight with emergency light feature

5

YEARS
MANUFACTURER
WARRANTY



The SLP-2 portable spotlight with emergency light feature is impressive thanks to its high luminosity and robustness. Whether continuous or flashing lights are required, clever details enable flexible use in buildings or as standard equipment for response vehicles.

SLP-2

MOBILE LIGHTING FOR ALL EVENTUALITIES

Portable spotlight with emergency light feature

4-hour work light, 8-hour continuous light or 8-hour flashing light can be selected using the button

Includes orange filter on the back

Standby mode for automatically switching on the light in the charging cradle in the event of a power failure

Charging cradle with power supply for connecting to 230 V and with plug for 12-V DC vehicle sockets


Maintenance-free lithium-ion rechargeable battery with charge status and capacity indicator

Lamp head can be swivelled 120° horizontally

Mounting bracket for mounting the charging cradle on a wall is available as an accessory



PRODUCT TYPES



SLP-2

INDOOR LIGHTING / PORTABLE SPOTLIGHT



- Portable spotlight with emergency light feature
- 4-hour work light, 8-hour continuous light or 8-hour flashing light can be selected using the button
- Includes orange filter on the back
- Standby mode for automatically switching on the light in the charging cradle in the event of a power failure
- Charging cradle with power supply for connecting to 230 V and with plug for 12-V DC vehicle sockets
- Maintenance-free lithium-ion rechargeable battery with charge status and capacity indicator
- Lamp head can be swivelled 120° horizontally
- Mounting bracket for mounting the charging cradle on a wall is available as an accessory

Product group/product name	Item no.	Installation position	Installation type	Light duration	Viewing distance	Luminous flux	Rated output P	Luminous efficacy	Lamp holder	DALI	Automatic testing	Battery	Dimensions (mm)	Circuit diagram	Core portfolio	New product
6200 K																
SLP-2 (red/black)	EN10050015	Wall	Surface / vehicle			235 lm						Li-Ion	X 122, Y 94, Z 270		•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Mounting					
SLP-2 WALL MOUNTING PLATE	EN10050206	Wall bracket for the charging cradle of the SLP-2 portable spotlight	X 150, Y 130, Z 110	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Spare parts					
Battery					
SLP-2 BATTERY Li-Ion 2200mAh	EN10061127	Spare Li-ion rechargeable battery (7.4 V/2200 mAh) for SLP-2 portable spotlight with plug connection protected against reverse polarity	X 17, Y 36, Z 65	•	
Power supply					
SLP-2 POWER SUPPLY	EN10061110	Plug-in power supply for portable spotlight	X 62, Y 36, Z 49	•	



- Particularly flexible applications due to pivot joint
- Equipped with 360° creep protection
- KNX version with two dimmable light channels for orientation lights

5 YEARS
MANUFACTURER
WARRANTY



The RC outdoor motion detectors are suitable for all common applications on building façades and projections thanks to the wide range of setting and installation options. A special bracket also enables trouble-free wall or ceiling mounting on inner and outer corners. 360° creep protection ensures unbroken coverage — and therefore maximum safety.

ESY
CONTROL



Parameterisable with ESY-Pen and ESY-App. More on pages 220 – 221 and at: esylux.com/esy-pen.

RC

RELIABLE DETECTION FOR FLEXIBLE USE

Movement and daylight-dependent switching of outdoor lighting

Easy wall or ceiling mounting thanks to pivot joint and one-handed plug-in base with large wiring area

Special bracket for mounting on inner and outer corners available as an accessory

Immediately ready for use thanks to pre-installed factory settings

High level of safety thanks to 360° creep protection

Convenient modification of settings and functions using an infrared remote control (e.g. permanent on/off switching of the lighting for 12 hours or automatic reading of the current light value)

Simple through-wiring thanks to the double cable entry with elastic sealing membrane


Retractable setting elements prevent unintentional parameter adjustment

Wide range of options for adapting the detection range to the conditions at the property

Zero-cross switching for LED switching that protects the relay



PRODUCT TYPES



FIELD OF DETECTION			DETECTION RANGE		
				Wall 130°	Wall 230° / 280°
			■ Diagonally (A)	20 m	Ø 40 m
			■ Frontal (B)	8 m	Ø 16 m
			■ Creep protection (C)	Ø 6 m	Ø 6 m







Note: Technical data for specific products can be found at www.esylux.com.



- Movement and daylight-dependent switching of outdoor lighting
- Easy wall or ceiling mounting thanks to pivot joint and one-handed plug-in base with large wiring area
- Special bracket for mounting on inner and outer corners available as an accessory
- Immediately ready for use thanks to pre-installed factory settings
- High level of safety thanks to 360° creep protection
- Convenient modification of settings and functions using an infrared remote control (e.g. permanent on/off switching of the lighting for 12 hours or automatic reading of the current light value)
- Simple through-wiring thanks to the double cable entry with elastic sealing membrane
- Retractable setting elements prevent unintentional parameter adjustment
- Wide range of options for adapting the detection range to the conditions at the property
- Zero-cross switching for LED switching that protects the relay

Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Function	Constant lighting control	Push button input lighting	In-rush current	Adjustable switch-off delay time	Number of HVAC-channels	Push button input HVAC	Slave input	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Motion detectors / Ceiling and wall mounting / 12 - 36 V UC																		
12 - 36 V UC																		
RC 230i UC (white, similar to RAL 9010)	EM10015649	230°	Ø 40 m	SM	1	Switching								IP54	X 135, Y 78, Z 105	AW		
Motion detectors / Ceiling and wall mounting / KNX																		
KNX																		
RC 230 KNX (white, similar to RAL 9010)	EM10015472	230°	Ø 40 m	SM	2	Switching/Regulate	•	1		•	1	•	•	IP54	X 135, Y 78, Z 105	O		
RC 230 KNX BK (black, similar to RAL 9005)	EM10015489	230°	Ø 40 m	SM	2	Switching/Regulate	•	1		•	1	•	•	IP54	X 135, Y 78, Z 105	O		★
Motion detectors / Ceiling and wall mounting / ON/OFF																		
ON/OFF																		
RC 130i black (black, similar to RAL 9005)	EM10015212	130°	r 20 m	SM	1	Switching			100 A / 200 µs	•				IP54	X 135, Y 78, Z 105	AW		
RC 130i brown (brown, similar to RAL 8017)	EM10015113	130°	r 20 m	SM	1	Switching			100 A / 200 µs	•				IP54	X 135, Y 78, Z 105	AW		
RC 130i white (white, similar to RAL 9010)	EM10015014	130°	r 20 m	SM	1	Switching			100 A / 200 µs	•				IP54	X 135, Y 78, Z 105	AW		
RC 230i black (black, similar to RAL 9005)	EM10015519	230°	Ø 40 m	SM	1	Switching			100 A / 200 µs	•				IP54	X 135, Y 78, Z 105	AW		
RC 230i brown (brown, similar to RAL 8017)	EM10015410	230°	Ø 40 m	SM	1	Switching			100 A / 200 µs	•				IP54	X 135, Y 78, Z 105	AW		
RC 230i white (white, similar to RAL 9010)	EM10015311	230°	Ø 40 m	SM	1	Switching			100 A / 200 µs	•				IP54	X 135, Y 78, Z 105	AW		
RC 230i stainless steel appearance (silver-grey, similar to RAL 9006)	EM10015618	230°	Ø 40 m	SM	1	Switching			100 A / 200 µs	•				IP54	X 135, Y 78, Z 105	AW		
RC 280i black (black, similar to RAL 9005)	EM10015915	280°	Ø 40 m	SM	1	Switching			100 A / 200 µs	•				IP54	X 135, Y 78, Z 105	AW		
RC 280i brown (brown, similar to RAL 8017)	EM10015816	280°	Ø 40 m	SM	1	Switching			100 A / 200 µs	•				IP54	X 135, Y 78, Z 105	AW		
RC 280i white (white, similar to RAL 9010)	EM10015717	280°	Ø 40 m	SM	1	Switching			100 A / 200 µs	•				IP54	X 135, Y 78, Z 105	AW		

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio New product
Accessories				
Electrical accessories				
FILTER 230 V	EP10426988	Filter for suppression of inductive loads, such as relays, contactors, fluorescent lamps and transformers	X 62, Y 26, Z 10	•
Mounting				
RC EDGE MOUNTING BK	EM10016134	Corner bracket for RC series, black	X 85, Y 72, Z 38	•
RC EDGE MOUNTING BN	EM10016127	Corner bracket for RC series, brown	X 85, Y 72, Z 38	•
RC EDGE MOUNTING SR	EM10016141	Corner bracket for RC series, silver	X 85, Y 72, Z 38	•
RC EDGE MOUNTING WH	EM10016110	Corner bracket for RC series, white	X 85, Y 72, Z 38	•
Remote control				
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•
RC REMOTE CONTROL	EM10016004	IR remote control for RC series	X 100, Y 50, Z 9	•
REMOTE CONTROL USER	EM10016011	IR remote control for end users	X 56, Y 29, Z 7	•

AV		0	
	Standard operation.		Standard operation.
AW			
	Standard operation with optional parallel wiring of max. eight motion detectors.	An RC filter (A) may be required when connecting inductors (e.g. relays, contactors, ballasts).	
AW			
	Standard operation with automatic stairwell light.	Standard operation with the additional possibility of switching on by hand.	

- Time-dependent operating modes
- Password protection against unauthorised parameterisation
- Intelligent vandalism and sabotage protection (light switches on in the event of a malfunction)

5 YEARS
MANUFACTURER
WARRANTY



The DEFENSOR motion detectors can be relied upon in every situation thanks to intelligent vandalism and sabotage protection or time-dependent operating modes. Particularly convenient: With the factory settings, the device can be commissioned immediately and the settings can be conveniently adjusted at a later date using the ESY-Pen and ESY-App or remote controls for installer and user. Tailored configuration of fields of detection and variants with switch-off delay times based on motion direction detection mean that this device can be controlled even more precisely, while the many mounting options ensure great flexibility.



Parameterisable with ESY-Pen and ESY-App. More on pages 220 - 221 and at: esylux.com/esy-pen.

DEFENSOR

EASILY OFFERS MORE PROTECTION

Movement and daylight-dependent switching of outdoor lighting

Time-dependent operating modes (230° and 280°)

Intelligent vandalism and sabotage protection (230° and 280°; light switches on in the event of a malfunction)

360° creep protection (230° and 280°; can be deactivated)

Switch-off delay times based on motion direction detection (230° and 280°)

Password protection against unauthorised parameterisation

Factory settings ensure immediate operability



Easy to configure using the ESY-Pen and ESY-App or with remote controls for installer and user

Flexible sensor head for wall and ceiling mounting (230° and 280°)

Quick installation using push terminals up to 2.5 mm²






PRODUCT TYPES



FIELD OF DETECTION

DETECTION RANGE



	Wall 200°	Wall 230° / 280°
■ Diagonally (A)	Ø 24 m	Ø 40 m
■ Frontal (B)	Ø 8 m	Ø 10 m
■ Creep protection (C)	-	Ø 4 m

Note: Technical data for specific products can be found at www.esylux.com.




- Movement and daylight-dependent switching of outdoor lighting
- Time-dependent operating modes (230° and 280°)
- Intelligent vandalism and sabotage protection (230° and 280°; light switches on in the event of a malfunction)
- 360° creep protection (230° and 280°; can be deactivated)
- Switch-off delay times based on motion direction detection (230° and 280°)
- Password protection against unauthorised parameterisation
- Factory settings ensure immediate operability
- Easy to configure using the ESY-Pen and ESY-App or with remote controls for installer and user
- Flexible sensor head for wall and ceiling mounting (230° and 280°)
- Quick installation using push terminals up to 2.5 mm²
- Through-wiring thanks to double diaphragm line entry, including for an earthing cable with a diameter of 15 mm
- Masking of fields of detection thanks to the lens mask that can be cut to size
- Customisable sensitivity of fields of detection (230° and 280°)
- Very high overvoltage protection (surge 2 kV, burst 4 kV)
- Zero-cross switching for LED switching that protects the relay
- Switch input
- Impulse feature
- Special bracket for mounting on inner and outer corners, available as accessory

Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Function	Constant lighting control	Push button input lighting	In-rush current	Adjustable switch-off delay time	Number of HVAC-channels	Push button input HVAC	Slave input	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Motion detectors / Ceiling and wall mounting / ON/OFF																		
ON/OFF																		
DEFENSOR MD 200° 24 IR 1C IP55 AN (graphite grey, similar to RAL 7024)	EM10025365	200°	Ø 24 m	SM	1	Switching	1	800 A / 200 µs	•				IP55	X 108, Y 92, Z 108	AX	•		
DEFENSOR MD 200° 24 IR 1C IP55 WH (white, similar to RAL 9003)	EM10025358	200°	Ø 24 m	SM	1	Switching	1	800 A / 200 µs	•				IP55	X 108, Y 92, Z 108	AX	•		
DEFENSOR MD 230° 40 IR 1C IP55 AN (graphite grey, similar to RAL 7024)	EM10025389	230°	Ø 40 m	SM	1	Switching	1	800 A / 200 µs	•				IP55	X 138, Y 92, Z 108	AX	•		
DEFENSOR MD 230° 40 IR 1C IP55 WH (white, similar to RAL 9003)	EM10025372	230°	Ø 40 m	SM	1	Switching	1	800 A / 200 µs	•				IP55	X 138, Y 92, Z 108	AX	•		
DEFENSOR MD 280° 40 IR 1C IP55 AN (graphite grey, similar to RAL 7024)	EM10025402	280°	Ø 40 m	SM	1	Switching	1	800 A / 200 µs	•				IP55	X 138, Y 92, Z 108	AX	•		
DEFENSOR MD 280° 40 IR 1C IP55 WH (white, similar to RAL 9003)	EM10025396	280°	Ø 40 m	SM	1	Switching	1	800 A / 200 µs	•				IP55	X 138, Y 92, Z 108	AX	•		

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Adapter					
DEFENSOR SPACER AN	EM10025433	Spacer for DEFENSOR series, anthracite	X 86,5, Y 85, Z 28	•	
DEFENSOR SPACER WH	EM10025426	Spacer for DEFENSOR series, white	X 86,5, Y 85, Z 28	•	
Mounting					
DEFENSOR EDGE MOUNTING AN	EM10025457	Corner bracket for DEFENSOR series, anthracite	X 107,5, Y 92, Z 31,2	•	
DEFENSOR EDGE MOUNTING WH	EM10025419	Corner bracket for DEFENSOR series, white	X 107,5, Y 92, Z 31,2	•	
Remote control					
DEFENSOR REMOTE CONTROL	EM10025501	IR remote control for quickly and easily adjusting the level of brightness, switch-off delay time, detection sensitivity and other parameters.	X 100, Y 50, Z 9	•	★
DEFENSOR REMOTE CONTROL USER	EM10025495	IR remote control for end users of the DEFENSOR series: Setting the level of brightness, the switch-off delay time (5 or 15 minutes) and light ON/OFF for 12 hours	X 56, Y 29, Z 7	•	
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•	


AX

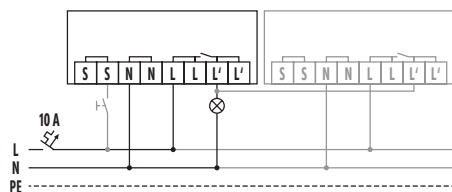

Standard with optional control via a closing button and parallel wiring of max. ten devices.



ESY-Pen and ESY-App
EP10425356



DEFENSOR REMOTE CONTROL
EM10025501



DEFENSOR REMOTE CONTROL USER
EM10025495



Lighting on / off	•	•	
Lighting on / off for four hours	•	•	
Lighting on / off for 12 hours	•	•	•
Reset to automatic mode	•	•	•
Set time and date	•		
360° creep protection on / off	•	•	
Fully automatic operating mode	•	•	
Semi-automatic operating mode	•	•	
Twilight switch operating mode	•	•	
Time-dependent operating modes	•		
Brightness level of 2 - 2000 lx (TS: 500 lx)	•	2 lx, 5 lx, 20 lx, 100 lx	
Automatically read in brightness level	•	•	•
Switch-off delay time	•	1 min, 2 min, 5 min, 8 min, 16 min, 30 min, 1 h	5 min, 15 min
Switch-off delay times based on motion direction detection	•		
Impulse feature	•	•	
Overall motion detector sensitivity	•	100 %, 75 %, 50 %	
Motion detector sensitivity for individual detection zones	•		
Sensor LED on / off	•	•	
Reset to default settings	•	•	
Test mode	•	•	
Password protection*	•		
Clone parameters	•		
PDF documentation	•		
Batch processing of parameters	•		

* Password protection that is activated using the ESY-App and ESY-Pen cannot be overridden by the remote controls.

- Harmonious design
- Optimised for controlling LED lights in outdoor areas
- Individual fields of detection for two zones

5 YEARS
MANUFACTURER
WARRANTY



ESY
CONTROL



The design of the MD-W series blends in harmoniously with the design of outer façades — entirely in keeping with common stair or wall lights. Different coloured covering caps available as accessories enable the housing to be tailored to the respective building.

Parameterisable with ESY-Pen and ESY-App. More on pages 220 – 221 and at: esylux.com/esy-pen.

MD-W

FUNCTIONALITY MEETS DESIGN

Motion and daylight dependent switching of outdoor lighting

Harmonious design with various covering caps

Simple wall mounting thanks to universal one-handed plug-in base with large wiring area

Instantly ready to use due to pre-installed factory settings


Convenient modification of settings and functions thanks to IR remote control (e.g. switch on/off of lighting or automatic input of the current light value)

Simple through-wiring due to double line entrance with elastic sealing membrane


Simple adjustment of the detection range thanks to lens covers that can be cut to size and mechanically adjustable covers


Concealed setting elements prevent unintentional parameter adjustment

Optimised for the control of LED lights via high-performance relay with tungsten pre-contact



PRODUCT TYPES



FIELD OF DETECTION	DETECTION RANGE	
		Wall 200°
	Diagonally (A)	Ø 20 m
	Frontal (B)	Ø 10 m
	-	-


Note: Technical data for specific products can be found at www.esylux.com.




- Motion and daylight dependent switching of outdoor lighting
- Harmonious design with various covering caps
- Simple wall mounting thanks to universal one-handed plug-in base with large wiring area
- Instantly ready to use due to pre-installed factory settings
- Convenient modification of settings and functions thanks to IR remote control (e.g. switch on/off of lighting or automatic input of the current light value)
- Simple through-wiring due to double line entrance with elastic sealing membrane
- Simple adjustment of the detection range thanks to lens covers that can be cut to size and mechanically adjustable covers
- Concealed setting elements prevent unintentional parameter adjustment
- Optimised for the control of LED lights via high-performance relay with tungsten pre-contact

Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Function	Constant lighting control	Push button input lighting	In-rush current	Adjustable switch-off delay time	Number of HVAC-channels	Push button input HVAC	Slave input	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Motion detectors / Wall mounting / ON/OFF																		
ON/OFF																		
MD-W 200i black (black, similar to RAL 9005)	EM10041020	200°	Ø 20 m	SM	1	Switching			800 A / 200 µs	•				IP55	X 110, Z 55	AW	•	
MD-W 200i white (white, similar to RAL 9010)	EM10041006	200°	Ø 20 m	SM	1	Switching			800 A / 200 µs	•				IP55	X 110, Z 55	AW	•	


Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Cover					
MD-W COVER BK	EM10041112	Cover cap for MD-W series, black	X 110, Z 55	•	
MD-W COVER BN	EM10041105	Cover cap for MD-W series, brown	X 110, Z 55	•	
MD-W COVER SR	EM10041129	Cover cap for MD-W series, silver	X 110, Z 55	•	
MD-W COVER WH	EM10041099	Cover cap for MD-W series, white	X 110, Z 55	•	
Remote control					
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•	
REMOTE CONTROL USER	EM10016011	IR remote control for end users	X 56, Y 29, Z 7	•	




Standard operation with optional parallel wiring of max. eight motion detectors.



An RC filter (A) may be required when connecting inductors (e.g. relays, contactors, ballasts).



Standard operation with automatic stairwell light.



Standard operation with the additional possibility of switching on by hand.

- Optimised for the unobtrusive control of LED lights in outdoor areas
- One-handed plug-in base for easy installation

5 YEARS
MANUFACTURER
WARRANTY



Mounted on house walls, garages or other façades, the MD outdoor motion detectors enable discreet, needs-based control of outdoor lighting. Different housing colours enable a perfect visual match with the respective building.

MD

MODERN SENSORS EASILY INSTALLED

Motion and daylight dependent switching of outdoor lighting

Simple wall mounting thanks to universal one-handed plug-in base with large wiring area

Special bracket for mounting on inner and outer corners available as an accessory

Simple through-wiring due to double line entrance with elastic sealing membrane

Instantly ready to use due to pre-installed factory settings


Simple adjustment of the range and field of detection thanks to the revolving and tilting ball head technology and the lens cover, which can be cut to size



Change the level of brightness and switch-off delay time easily using the operating elements on the detector

Optimised to control LED lights while protecting the relay through zero-cross switching



PRODUCT TYPES



FIELD OF DETECTION		DETECTION RANGE		
			Wall 120°	Wall 200°
		Diagonally (A)	12 m	Ø 20 m
		Frontal (B)	5 m	Ø 10 m
		-	-	-


Note: Technical data for specific products can be found at www.esylux.com.




- Motion and daylight dependent switching of outdoor lighting
- Simple wall mounting thanks to universal one-handed plug-in base with large wiring area
- Special bracket for mounting on inner and outer corners available as an accessory
- Simple through-wiring due to double line entrance with elastic sealing membrane
- Instantly ready to use due to pre-installed factory settings
- Simple adjustment of the range and field of detection thanks to the revolving and tilting ball head technology and the lens cover, which can be cut to size
- Change the level of brightness and switch-off delay time easily using the operating elements on the detector
- Optimised to control LED lights while protecting the relay through zero-cross switching

Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Function	Constant lighting control	Push button input lighting	In-rush current	Adjustable switch-off delay time	Number of HVAC-channels	Push button input HVAC	Slave input	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Motion detectors / Wall mounting / ON/OFF																		
ON/OFF																		
MD 120 black (black, similar to RAL 9005)	EM10025235	120°	r 12 m	SM	1	Switching			30 A / 20 ms	•				IP44	X 102, Y 74, Z 81	AY	•	
MD 120 brown (brown, similar to RAL 8017)	EM10025228	120°	r 12 m	SM	1	Switching			30 A / 20 ms	•				IP44	X 102, Y 74, Z 81	AY	•	
MD 120 white (white, similar to RAL 9010)	EM10025211	120°	r 12 m	SM	1	Switching			30 A / 20 ms	•				IP44	X 102, Y 74, Z 81	AY	•	
MD 200 black (black, similar to RAL 9005)	EM10025334	200°	Ø 20 m	SM	1	Switching			30 A / 20 ms	•				IP44	X 102, Y 74, Z 81	AY	•	
MD 200 brown (brown, similar to RAL 8017)	EM10025327	200°	Ø 20 m	SM	1	Switching			30 A / 20 ms	•				IP44	X 102, Y 74, Z 81	AY	•	
MD 200 white (white, similar to RAL 9010)	EM10025310	200°	Ø 20 m	SM	1	Switching			30 A / 20 ms	•				IP44	X 102, Y 74, Z 81	AY	•	


Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Electrical accessories					
FILTER 230 V	EP10426988	Filter for suppression of inductive loads, such as relays, contactors, fluorescent lamps and transformers	X 62, Y 26, Z 10	•	
Mounting					
MD EDGE MOUNTING BK	EM10025532	Corner bracket for MD series, black	X 65, Y 72, Z 25	•	
MD EDGE MOUNTING BN	EM10025525	Corner bracket for MD series, brown	X 65, Y 72, Z 25	•	
MD EDGE MOUNTING WH	EM10025518	Corner bracket for MD series, white	X 65, Y 72, Z 25	•	



Standard operation with optional parallel wiring of max. eight motion detectors.



When connecting inductors (e.g. relays, contactors, ballasts) the use of a filter (A) may be necessary.



Standard operation with automatic stairwell light.

- High-quality technology at an entry-level price

5 YEARS
MANUFACTURER
WARRANTY



The sensors from the BASIC series offer a simple entry route into demand-driven building automation. Mounted on house walls, garages or other façades, the wall-mounted motion detectors from this series enable convenient, energy-efficient control of outdoor lighting.

BASIC

FULL ENERGY EFFICIENCY AT A LOW PRICE

Movement and daylight dependent switching of outdoor lighting

Bracket for easy wall mounting

Double line entrance with elastic sealing membrane

Instantly ready to use due to pre-installed factory settings


Easy adjustment of range and field of detection with revolving and tilting ball-head technology

Change the level of brightness and switch-off delay time easily using controls in the detector


Large variant with more wiring area for cables up to 2.5 mm²



PRODUCT TYPES

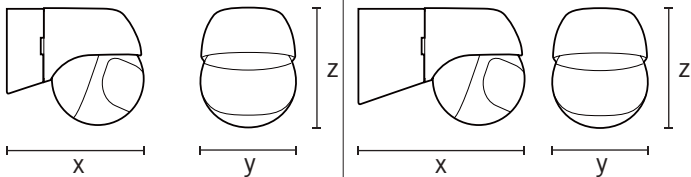

FIELD OF DETECTION



DETECTION RANGE

	Wall 180°
■ Diagonally (A)	Ø 20 m
■ Frontal (B)	Ø 10 m
-	-

Note: Technical data for specific products can be found at www.esylux.com.


BASIC

OUTDOOR AUTOMATION / MOTION DETECTORS




- Movement and daylight dependent switching of outdoor lighting
- Bracket for easy wall mounting
- Double line entrance with elastic sealing membrane
- Instantly ready to use due to pre-installed factory settings
- Easy adjustment of range and field of detection with revolving and tilting ball-head technology
- Change the level of brightness and switch-off delay time easily using controls in the detector
- Large variant with more wiring area for cables up to 2.5 mm²

Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Function	Constant lighting control	Push button input lighting	In-rush current	Adjustable switch-off delay time	Number of HVAC-channels	Push button input HVAC	Slave input	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Motion detectors / Wall mounting / ON/OFF																		
ON/OFF																		
MD 180 BASIC black (black, similar to RAL 9005)	EM10055096	180°	Ø 20 m	SM	1	Switching			40 A / 20 ms	•				IP44	X 80, Y 55, Z 66	AZ	•	
MD 180 BASIC white (white, similar to RAL 9010)	EM10055089	180°	Ø 20 m	SM	1	Switching			40 A / 20 ms	•				IP44	X 80, Y 55, Z 66	AZ	•	
MD 180 BASIC L black (black, similar to RAL 9005)	EM10055515	180°	Ø 20 m	SM	1	Switching			40 A / 20 ms	•				IP44	X 102, Y 55, Z 66	AZ	•	
MD 180 BASIC L white (white, similar to RAL 9010)	EM10055508	180°	Ø 20 m	SM	1	Switching			40 A / 20 ms	•				IP44	X 102, Y 55, Z 66	AZ	•	

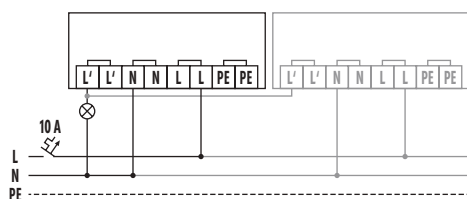


Standard operation with optional parallel wiring of max. six motion detectors.




When connecting inductors (e.g. relays, contactors, ballasts) the use of a filter (A) may be necessary.

AZ

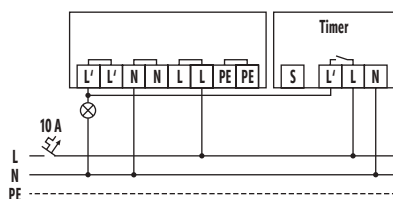

Standard operation with automatic stairwell light.



Standard operation with the additional possibility of switching on by hand.



- Time-dependent operating modes (TST)
- Password protection against unauthorised parameterisation
- High overvoltage protection (surge 2 kV, burst 4 kV)

5 YEARS
MANUFACTURER
WARRANTY



The DEFENSOR twilight switches reliably and discreetly increase safety around the building. Once darkness falls, they automatically or semi-automatically switch on the lights in the event of insufficient ambient lighting or can also be controlled via time-dependent operating modes. They therefore guarantee flexibility and energy efficiency, as well as protecting the relay during the operation of LED lights thanks to zero-cross switching. With the factory settings, the device can be commissioned immediately and the settings can be conveniently adjusted at a later date using the ESY-Pen and ESY-App or remote controls for installer and user.

ESY
CONTROL



Parameterisable with ESY-Pen and ESY-App. More on pages 220 – 221 and at: esylux.com/esy-pen.

DEFENSOR

EASILY OFFERS MORE PROTECTION

Daylight-dependent switching of outdoor lighting

Time-dependent operating modes (TS T)

Password protection against unauthorised parameterisation

Factory settings ensure immediate operability

High overvoltage protection
(surge voltage 2 kV, repeating fast transients 4 kV)

Simple installation thanks to the large wiring space and push terminals
up to 2.5 mm²

Through-wiring thanks to double diaphragm line entry, including for
earthing cable with a diameter of 15 mm


Easy to configure using the ESY-Pen and ESY-App or with remote controls
for installer and user

Switching delay prevents switching errors

Zero-cross switching for LED switching that protects the relay



PRODUCT TYPES



DEFENSOR

OUTDOOR AUTOMATION / TWILIGHT SWITCH




- Daylight-dependent switching of outdoor lighting
- Time-dependent operating modes (TS T)
- Password protection against unauthorised parameterisation
- Factory settings ensure immediate operability
- High overvoltage protection (surge voltage 2 kV, repeating fast transients 4 kV)
- Simple installation thanks to the large wiring space and push terminals up to 2.5 mm²²
- Through-wiring thanks to double diaphragm line entry, including for earthing cable with a diameter of 15 mm
- Easy to configure using the ESY-Pen and ESY-App or with remote controls for installer and user
- Switching delay prevents switching errors
- Zero-cross switching for LED switching that protects the relay
- Switch input

Product group/product name	Item no.	Installation type	Number of light channels	Push button input lighting	In-rush current	Level of brightness	Integrated timer	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Twilight switch / Wall mounting / ON/OFF												
ON/OFF												
DEFENSOR TS IR 1C IP55 WH (white, similar to RAL 9003)	ED10025471	SM	1	1	800 A / 200 µs	2 - 500 lx		IP55	X 46, Y 92, Z 108	AX	•	
DEFENSOR TS T IR 1C IP55 WH (white, similar to RAL 9003)	ED10025464	SM	1	1	800 A / 200 µs	2 - 500 lx	•	IP55	X 46, Y 92, Z 108	AX	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Adapter					
DEFENSOR SPACER WH	EM10025426	Spacer for DEFENSOR series, white	X 86,5, Y 85, Z 28	•	
Mounting					
DEFENSOR EDGE MOUNTING WH	EM10025419	Corner bracket for DEFENSOR series, white	X 107,5, Y 92, Z 31,2	•	
Remote control					
DEFENSOR REMOTE CONTROL	EM10025501	IR remote control for quickly and easily adjusting the level of brightness, switch-off delay time, detection sensitivity and other parameters.	X 100, Y 50, Z 9	•	★
DEFENSOR REMOTE CONTROL USER	EM10025495	IR remote control for end users of the DEFENSOR series: Setting the level of brightness, the switch-off delay time (5 or 15 minutes) and light ON/OFF for 12 hours	X 56, Y 29, Z 7	•	
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•	

AX

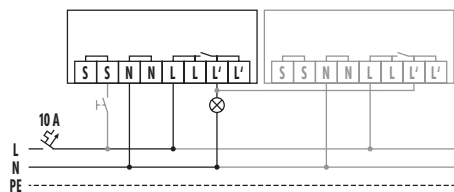

Standard with optional control via a closing button and parallel wiring of max. ten devices.

- Large wiring space for easy installation

3 YEARS
MANUFACTURER
WARRANTY



The CDS series twilight switches control the outdoor lighting automatically and reliably based on the current ambient light. This provides safety, enhances comfort — and reduces energy consumption.

CDS

UNOBTRUSIVE, RELIABLE, EASILY
INSTALLED

Daylight dependent switching of outdoor lighting




Simple installation due to the large connection space and push terminals
up to 2.5 mm²

Light value can be adjusted using the control element on the outside of
the housing (switching point)

Switching delay to avoid incorrect switching due to temporary, e.g.
weather-related brightness variations



PRODUCT TYPES

		
---	---	--

Note: Technical data for specific products can be found at www.esylux.com.



- Daylight dependent switching of outdoor lighting
- Simple installation due to the large connection space and push terminals up to 2.5 mm²
- Light value can be adjusted using the control element on the outside of the housing (switching point)
- Switching delay to avoid incorrect switching due to temporary, e.g. weather-related brightness variations

Product group/product name	Item no.	Installation type	Number of light channels	Push button input lighting	In-rush current	Level of brightness	Integrated timer	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Twilight switch / Wall mounting / ON/OFF												
ON/OFF												
CDS-A/N (white, similar to RAL 9010)	ED10016530	SM	1			5 - 300 lx		IP54	X 96, Y 76, Z 52	BA	•	
CDS-A/T (white, similar to RAL 9010)	RK39500010040	SM	1			5 - 300 lx	•	IP54	X 114, Y 80, Z 51	BB	•	
CDS-E (white, similar to RAL 9010)	ED10016509	RM	1			5 - 300 lx		IP20	X 60, Y 70, Z 26	BC	•	

BA		BB	
	Standard operation.		Standard operation.
BC			
	Standard operation.		



- Classic design with integrated motion detector
- Control of further luminaires possible

3 YEARS
MANUFACTURER
WARRANTY



With the AL series, the light in entrance areas, passageways or terraces can be controlled as required.

AL

ROUND, CLASSIC, INTELLIGENT

Light holder with integrated motion detector and 130° angle of detection (two sensors) and 360° creep protection (one sensor) for unbroken coverage

For combination with various system glass designs


Simple adjustment of the range and field of detection thanks to the lens cover, which can be cut to size

Switching output for connecting additional lights

Simple wall mounting due to universal one-handed plug-in base and large wiring area



PRODUCT TYPES



LIGHT DISTRIBUTION	FIELD OF DETECTION	DETECTION RANGE	
			Wall 12 m
		Diagonally (A)	12 m
		Frontal (B)	4
		-	-

C0, C90, C0 / C90


Note: Technical data for specific products can be found at www.esylux.com.




- Light holder with integrated motion detector and 130° angle of detection (two sensors) and 360° creep protection (one sensor) for unbroken coverage
- For combination with various system glass designs
- Simple adjustment of the range and field of detection thanks to the lens cover, which can be cut to size
- Switching output for connecting additional lights
- Simple wall mounting due to universal one-handed plug-in base and large wiring area

Product group/product name	Item no.	Light colour (IEC 1231)	Luminous flux	Rated output P	Luminous efficacy	Unified Glare Rating	Glare suppression	Diffuser	Protection type	Control system	BT (Bluetooth)	Sensor	Energy efficiency class	Dimensions (mm)	Circuit diagram	Core portfolio	New product
GARDA / opal																	
AL GARDA WL OP MD BK (black, similar to RAL 9005)	EL10026126							OP	IP44	ON/OFF		•		X 275, Y 185, Z 250	BG	•	
AL GARDA WL OP MD WH (white, similar to RAL 9010)	EL10026133							OP	IP44	ON/OFF		•		X 275, Y 185, Z 250	BG	•	
MONZA / transparent																	
AL MONZA WL TR MD BK (black, similar to RAL 9005)	EL10026119							TR	IP44	ON/OFF		•		X 275, Y 185, Z 250	BG	•	
AL MONZA WL TR MD WH (white, similar to RAL 9010)	EL10026102							TR	IP44	ON/OFF		•		X 275, Y 185, Z 250	BG	•	


Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Spare parts					
Cover					
System glass AL P GARDA	EL10026157	System glass for lights: AL GARDA	X 215, Z 210	•	
System glass AL P MONZA	EL10026164	System glass for lights: AL MONZA	X 215, Z 210	•	



Standard operation with optional parallel connection of automatic luminaires.



Standard operation with additional continuous lighting function through external switch.



Standard operation with the additional possibility of switching on by hand.

- Easy wall mounting due to universal one-handed plug-in base and large wiring area
- Variants with integrated motion detectors, optimised for controlling additional LED lights

3 YEARS
MANUFACTURER
WARRANTY



The LED wall lights in the OL/AOL series are a timeless classic due to their elegant appearance and can be stylishly placed in any environment and improve the look of façades or entrance areas. The durable, die-cast aluminium housing makes them highly reliable and the optionally integrated motion detector ensures convenient, energy-efficient operation. Clever details simplify installation.

OL/AOL

TIMELESS DESIGN FOR ALL FAÇADES

Elegant design with high-quality aluminium housing

Simple wall mounting due to universal one-hand plug-in base with large wiring space

Simple through-wiring due to the double cable entry with elastic sealing membrane

Plug-in terminal for through-wiring of the protective conductor included

Variants with integrated motion detector for demand-controlled switching of lighting

Simple adjustment of the range and field of detection thanks to the lens cover, which can be cut to size

PRODUCT TYPES

LIGHT DISTRIBUTION	FIELD OF DETECTION	DETECTION RANGE	
			Wall 10 m
		■ Diagonally (A)	10 m
		■ Frontal (B)	2 m

■ C0, ■ C90, ■ C0 / C90




Note: Technical data for specific products can be found at www.esylux.com.



- Elegant design with high-quality aluminium housing
- Simple wall mounting due to universal one-hand plug-in base with large wiring space
- Simple through-wiring due to the double cable entry with elastic sealing membrane
- Plug-in terminal for through-wiring of the protective conductor included
- Variants with integrated motion detector for demand-controlled switching of lighting
- Simple adjustment of the range and field of detection thanks to the lens cover, which can be cut to size

Product group/product name	Item no.	Light colour (IEC 1231)	Luminous flux	Rated output P	Luminous efficacy	Unified Glare Rating	Glare suppression	Diffuser	Protection type	Control system	BT (Bluetooth)	Sensor	Energy efficiency class	Dimensions (mm)	Circuit diagram	Core portfolio	New product
3000 K / 10 W																	
AOL WL 100 OP 900 830 MD BK (black, similar to RAL 9005)	EL10750717	830	850 lm	10 W	85 lm/W			OP	IP55	ON/OFF		•	LED EEI E	X 205, Y 104, Z 143	BH	•	
AOL WL 100 OP 900 830 MD WH (white, similar to RAL 9016)	EL10750700	830	850 lm	10 W	85 lm/W			OP	IP55	ON/OFF		•	LED EEI E	X 205, Y 104, Z 143	BH	•	
OL WL 100 OP 900 830 BK (black, similar to RAL 9005)	EL10710711	830	850 lm	9,5 W	89 lm/W			OP	IP55	ON/OFF			LED EEI E	X 205, Y 104, Z 143	BI	•	
OL WL 100 OP 900 830 WH (white, similar to RAL 9016)	EL10710704	830	850 lm	9,5 W	89 lm/W			OP	IP55	ON/OFF			LED EEI E	X 205, Y 104, Z 143	BI	•	
3000 K / 17 W																	
AOL WL 200 OP 1600 830 MD BK (black, similar to RAL 9005)	EL10750816	830	1600 lm	17 W	94 lm/W			OP	IP55	ON/OFF		•	LED EEI E	X 205, Y 184, Z 143	BH	•	
AOL WL 200 OP 1600 830 MD WH (white, similar to RAL 9016)	EL10750809	830	1600 lm	17 W	94 lm/W			OP	IP55	ON/OFF		•	LED EEI E	X 205, Y 184, Z 143	BH	•	
OL WL 200 OP 1600 830 BK (black, similar to RAL 9005)	EL10710810	830	1600 lm	16,5 W	96 lm/W			OP	IP55	ON/OFF			LED EEI E	X 205, Y 184, Z 143	BI	•	
OL WL 200 OP 1600 830 WH (white, similar to RAL 9016)	EL10710803	830	1600 lm	16,5 W	96 lm/W			OP	IP55	ON/OFF			LED EEI E	X 205, Y 184, Z 143	BI	•	
5000 K / 10 W																	
AOL WL 100 OP 900 850 MD BK (black, similar to RAL 9005)	EL10750014	850	900 lm	10 W	90 lm/W			OP	IP55	ON/OFF		•	LED EEI E	X 205, Y 104, Z 143	BH	•	
AOL WL 100 OP 900 850 MD WH (white, similar to RAL 9016)	EL10750007	850	900 lm	10 W	90 lm/W			OP	IP55	ON/OFF		•	LED EEI E	X 205, Y 104, Z 143	BH	•	
OL WL 100 OP 900 850 BK (black, similar to RAL 9005)	EL10710018	850	900 lm	9,5 W	94 lm/W			OP	IP55	ON/OFF			LED EEI E	X 205, Y 104, Z 143	BI	•	
OL WL 100 OP 900 850 WH (white, similar to RAL 9016)	EL10710001	850	900 lm	9,5 W	94 lm/W			OP	IP55	ON/OFF			LED EEI E	X 205, Y 104, Z 143	BI	•	
5000 K / 17 W																	
AOL WL 200 OP 1700 850 MD BK (black, similar to RAL 9005)	EL10750113	850	1650 lm	17 W	97 lm/W			OP	IP55	ON/OFF		•	LED EEI E	X 205, Y 184, Z 143	BH	•	

Product group/product name	Item no.	Light colour (IEC 1231)	Luminous flux	Rated output P	Luminous efficacy	Unified Glare Rating	Glare suppression	Diffuser	Protection type	Control system	BT (Bluetooth)	Sensor	Energy efficiency class	Dimensions (mm)	Circuit diagram	Core portfolio	New product
AOL WL 200 OP 1700 850 MD WH (white, similar to RAL 9016)	EL10750106	850	1650 lm	17 W	97 lm/W			OP	IP55	ON/OFF		•	LED EEI E	X 205, Y 184, Z 143	BH	•	
OL WL 200 OP 1700 850 BK (black, similar to RAL 9005)	EL10710117	850	1650 lm	16,5 W	100 lm/W			OP	IP55	ON/OFF			LED EEI E	X 205, Y 184, Z 143	BI	•	
OL WL 200 OP 1700 850 WH (white, similar to RAL 9016)	EL10710100	850	1650 lm	16,5 W	100 lm/W			OP	IP55	ON/OFF			LED EEI E	X 205, Y 184, Z 143	BI	•	

BH																	
	Standard operation with optional connection of external loads.																
BI																	
	Standard operation with on/off switch.																
																	
	Controlled by an automatic light, e.g. the AOL 100 or AOL 200.																

- Protected against sea air and dirt-resistant
- Variants with integrated motion detectors feature orientation light and twilight switch function
- Motion detector enables the energy-efficient control of further lights and switch actuators

5 YEARS
MANUFACTURER
WARRANTY

The bollard lights in the ALVA series feature a high-quality design and are ideal for the intelligent lighting of paths, forecourts and driveways or green spaces. Their durability and die-cast aluminium housing ensure they meet all requirements for installation in public areas. The optional integrated motion detector provides energy-efficient, convenient operation.



Parameterisable with ESY-Pen and ESY-App. More on pages 220 – 221 and at: esylux.com/esy-pen.

ALVA

ROBUST PATH LIGHTING CAN BE NETWORKED INTELLIGENTLY

High-quality aluminium housing, protected against sea air and stain-resistant

Resistant to corrosion in accordance with EN ISO 9227 salt spray test (96 hr)

High level of resistance to cleaning agents (anti graffiti effect)

Variants with motion detectors for motion-dependent and daylight-dependent lighting switching and a DALI networking option; integration of 230-V end devices using DALI switch


DALI bus voltage supply integrated in lights with motion detectors

Variants with different light emissions (180° or 360°), different lamp heights and different diameters








Meets requirements for installation in public areas (IP65, IK09)

Basic lighting for increased safety in outdoor areas (orientation lighting)

Concealed LED arrangement, no glare from direct light



PRODUCT TYPES

					
LIGHT DISTRIBUTION		FIELD OF DETECTION		DETECTION RANGE	
					
					Wall 6 m
				Diagonally (A)	6 m
				Frontal (B)	2 m

Note: Technical data for specific products can be found at www.esylux.com.



- High-quality aluminium housing, protected against sea air and stain-resistant
- Resistant to corrosion in accordance with EN ISO 9227 salt spray test (96 hr)
- High level of resistance to cleaning agents (anti graffiti effect)
- Variants with motion detectors for motion-dependent and daylight-dependent lighting switching and a DALI networking option; integration of 230-V end devices using DALI switch
- DALI bus voltage supply integrated in lights with motion detectors
- Variants with different light emissions (180° or 360°), different lamp heights and different diameters
- Meets requirements for installation in public areas (IP65, IK09)
- Basic lighting for increased safety in outdoor areas (orientation lighting)
- Concealed LED arrangement, no glare from direct light

Product group/product name	Item no.	Light colour (IEC 1231)	Luminous flux	Rated output P	Luminous efficacy	Unified Glare Rating	Glare suppression	Diffuser	Protection type	Control system	BT (Bluetooth)	Sensor	Energy efficiency class	Dimensions (mm)	Circuit diagram	Core portfolio	New product
3000 K / 180° / 540 mm / Ø 170 mm																	
ALVA BL 540/170 OP 180° 500 830 AN (graphite grey, similar to RAL 7024)	EL10820700	830	620 lm	16 W	38 lm/W			OP	IP65	ON/OFF			LED EEI E	X 170, Z 540	BM	•	
ALVA BL 540/170 TR 180° 600 830 AN (graphite grey, similar to RAL 7024)	EL10820687	830	760 lm	16 W	47 lm/W			TR	IP65	ON/OFF			LED EEI E	X 170, Z 540	BM	•	
3000 K / 180° / 940 mm / Ø 170 mm																	
ALVA BL 940/170 OP 180° 500 830 AN (graphite grey, similar to RAL 7024)	EL10820649	830	620 lm	16 W	38 lm/W			OP	IP65	ON/OFF			LED EEI E	X 170, Z 940	BM	•	
ALVA BL 940/170 OP 180° 500 830 DALI AN (graphite grey, similar to RAL 7024)	EL10820809	830	620 lm	17 W	36 lm/W			OP	IP65	DALI			LED EEI E	X 170, Z 940	BN	•	
ALVA BL 940/170 OP 180° 500 830 MD IR DALI AN (graphite grey, similar to RAL 7024)	EL10820960	830	620 lm	17 W	36 lm/W			OP	IP65	DALI		•	LED EEI E	X 170, Z 940	BN	•	
ALVA BL 940/170 TR 180° 600 830 AN (graphite grey, similar to RAL 7024)	EL10820601	830	760 lm	16 W	47 lm/W			TR	IP65	ON/OFF			LED EEI E	X 170, Z 940	BM	•	
ALVA BL 940/170 TR 180° 600 830 DALI AN (graphite grey, similar to RAL 7024)	EL10820762	830	760 lm	17 W	44 lm/W			TR	IP65	DALI			LED EEI E	X 170, Z 940	BN	•	
ALVA BL 940/170 TR 180° 600 830 MD IR DALI AN (graphite grey, similar to RAL 7024)	EL10820922	830	760 lm	17 W	44 lm/W			TR	IP65	DALI		•	LED EEI E	X 170, Z 940	BN	•	
3000 K / 360° / 540 mm / Ø 170 mm																	
ALVA BL 540/170 TR 360° 1000 830 AN (graphite grey, similar to RAL 7024)	EL10820106	830	1270 lm	16 W	79 lm/W			TR	IP65	ON/OFF			LED EEI E	X 170, Z 540	BM	•	
3000 K / 360° / 700 mm / Ø 100 mm																	
ALVA BL 700/100 OP 360° 400 830 AN (graphite grey, similar to RAL 7024)	EL10821059	830	400 lm	7 W	57 lm/W			OP	IP65	ON/OFF			LED EEI F	X 100, Z 700	BM	•	
ALVA BL 700/100 OP 360° 400 830 DALI AN (graphite grey, similar to RAL 7024)	EL10821271	830	420 lm	7 W	60 lm/W			OP	IP65	DALI			LED EEI F	X 100, Z 700	BN	•	★
ALVA BL 700/100 OP 360° 400 830 MD IR DALI AN (graphite grey, similar to RAL 7024)	EL10821189	830	420 lm	7 W	60 lm/W			OP	IP65	DALI		•	LED EEI F	X 100, Z 700	BN	•	★
ALVA BL 700/100 TR 360° 500 830 AN (graphite grey, similar to RAL 7024)	EL10821134	830	530 lm	7 W	75 lm/W			TR	IP65	ON/OFF			LED EEI F	X 100, Z 700	BM	•	



Product group/product name	Item no.	Light colour (IEC 1231)	Luminous flux	Rated output P	Luminous efficacy	Unified Glare Rating	Glare suppression	Diffuser	Protection type	Control system	BT (Bluetooth)	Sensor	Energy efficiency class	Dimensions (mm)	Circuit diagram	Core portfolio	New product
ALVA BL 700/100 TR 360° 500 830 DALI AN (graphite grey, similar to RAL 7024)	EL10821257	830	500 lm	7 W	71 lm/W			TR	IP65	DALI			LED EEI F	X100, Z700	BN	•	★
ALVA BL 700/100 TR 360° 500 830 MD IR DALI AN (graphite grey, similar to RAL 7024)	EL10821172	830	500 lm	7 W	71 lm/W			TR	IP65	DALI		•	LED EEI F	X100, Z700	BN	•	★
3000 K / 360° / 940 mm / Ø 170 mm																	
ALVA BL 940/170 OP 360° 800 830 AN (graphite grey, similar to RAL 7024)	EL10820045	830	1030 lm	16 W	64 lm/W			OP	IP65	ON/OFF			LED EEI E	X170, Z940	BM	•	
ALVA BL 940/170 OP 360° 800 830 DALI AN (graphite grey, similar to RAL 7024)	EL10820243	830	1030 lm	17 W	60 lm/W			OP	IP65	DALI			LED EEI E	X170, Z940	BN	•	
ALVA BL 940/170 OP 360° 800 830 MD IR DALI AN (graphite grey, similar to RAL 7024)	EL10820441	830	1030 lm	17 W	60 lm/W			OP	IP65	DALI		•	LED EEI E	X170, Z940	BN	•	
ALVA BL 940/170 TR 360° 1000 830 AN (graphite grey, similar to RAL 7024)	EL10820007	830	1270 lm	16 W	79 lm/W			TR	IP65	ON/OFF			LED EEI E	X170, Z940	BM	•	
ALVA BL 940/170 TR 360° 1000 830 DALI AN (graphite grey, similar to RAL 7024)	EL10820205	830	1270 lm	17 W	74 lm/W			TR	IP65	DALI			LED EEI E	X170, Z940	BN	•	
ALVA BL 940/170 TR 360° 1000 830 MD IR DALI AN (graphite grey, similar to RAL 7024)	EL10820403	830	1270 lm	17 W	74 lm/W			TR	IP65	DALI		•	LED EEI E	X170, Z940	BN	•	
4000 K / 180° / 940 mm / Ø 170 mm																	
ALVA BL 940/170 OP 180° 600 840 AN (graphite grey, similar to RAL 7024)	EL10820663	840	630 lm	16 W	39 lm/W			OP	IP65	ON/OFF			LED EEI E	X170, Z940	BM	•	
ALVA BL 940/170 OP 180° 600 840 DALI AN (graphite grey, similar to RAL 7024)	EL10820823	840	630 lm	17 W	37 lm/W			OP	IP65	DALI			LED EEI E	X170, Z940	BN	•	
ALVA BL 940/170 OP 180° 600 840 MD IR DALI AN (graphite grey, similar to RAL 7024)	EL10820984	840	630 lm	17 W	37 lm/W			OP	IP65	DALI		•	LED EEI E	X170, Z940	BN	•	
ALVA BL 940/170 TR 180° 700 840 AN (graphite grey, similar to RAL 7024)	EL10820625	840	810 lm	16 W	50 lm/W			TR	IP65	ON/OFF			LED EEI E	X170, Z940	BM	•	
ALVA BL 940/170 TR 180° 700 840 DALI AN (graphite grey, similar to RAL 7024)	EL10820786	840	810 lm	17 W	47 lm/W			TR	IP65	DALI			LED EEI E	X170, Z940	BN	•	
ALVA BL 940/170 TR 180° 700 840 MD IR DALI AN (graphite grey, similar to RAL 7024)	EL10820946	840	810 lm	17 W	47 lm/W			TR	IP65	DALI		•	LED EEI E	X170, Z940	BN	•	
4000 K / 360° / 540 mm / Ø 170 mm																	
ALVA BL 540/170 TR 360° 1200 840 AN (graphite grey, similar to RAL 7024)	EL10820328	840	1350 lm	16 W	84 lm/W			TR	IP65	ON/OFF			LED EEI E	X170, Z540	BM	•	
4000 K / 360° / 700 mm / Ø 100 mm																	
ALVA BL 700/100 OP 360° 500 840 AN (graphite grey, similar to RAL 7024)	EL10821073	840	460 lm	7 W	65 lm/W			OP	IP65	ON/OFF			LED EEI F	X100, Z700	BM	•	
ALVA BL 700/100 OP 360° 500 840 DALI AN (graphite grey, similar to RAL 7024)	EL10821288	840	460 lm	7 W	65 lm/W			OP	IP65	DALI			LED EEI F	X100, Z700	BN	•	★
ALVA BL 700/100 OP 360° 500 840 MD IR DALI AN (graphite grey, similar to RAL 7024)	EL10821240	840	460 lm	7 W	65 lm/W			OP	IP65	DALI		•	LED EEI F	X100, Z700	BN	•	★
ALVA BL 700/100 TR 360° 600 840 AN (graphite grey, similar to RAL 7024)	EL10821158	840	560 lm	7 W	80 lm/W			TR	IP65	ON/OFF			LED EEI F	X100, Z700	BM	•	
ALVA BL 700/100 TR 360° 600 840 DALI AN (graphite grey, similar to RAL 7024)	EL10821264	840	600 lm	7 W	85 lm/W			TR	IP65	DALI			LED EEI F	X100, Z700	BN	•	★
ALVA BL 700/100 TR 360° 600 840 MD IR DALI AN (graphite grey, similar to RAL 7024)	EL10821196	840	600 lm	7 W	85 lm/W			TR	IP65	DALI		•	LED EEI F	X100, Z700	BN	•	★
4000 K / 360° / 940 mm / Ø 170 mm																	
ALVA BL 940/170 OP 360° 1000 840 AN (graphite grey, similar to RAL 7024)	EL10820069	840	1050 lm	16 W	65 lm/W			OP	IP65	ON/OFF			LED EEI E	X170, Z940	BM	•	
ALVA BL 940/170 OP 360° 1000 840 DALI AN (graphite grey, similar to RAL 7024)	EL10820267	840	1050 lm	17 W	61 lm/W			OP	IP65	DALI			LED EEI E	X170, Z940	BN	•	

Product group/product name	Item no.	Light colour (IEC 1231)	Luminous flux	Rated output P	Luminous efficacy	Unified Glare Rating	Glare suppression	Diffuser	Protection type	Control system	BT (Bluetooth)	Sensor	Energy efficiency class	Dimensions (mm)	Circuit diagram	Core portfolio	New product
ALVA BL 940/170 OP 360° 1000 840 MD IR DALI AN (graphite grey, similar to RAL 7024)	EL10820465	840	1050 lm	17 W	61 lm/W			OP	IP65	DALI		•	<div>LED E E I</div> <div>E</div>	X 170, Z 940	BN	•	
ALVA BL 940/170 TR 360° 1200 840 AN (graphite grey, similar to RAL 7024)	EL10820021	840	1350 lm	16 W	84 lm/W			TR	IP65	ON/OFF			<div>LED E E I</div> <div>E</div>	X 170, Z 940	BM	•	
ALVA BL 940/170 TR 360° 1200 840 DALI AN (graphite grey, similar to RAL 7024)	EL10820229	840	1350 lm	17 W	79 lm/W			TR	IP65	DALI			<div>LED E E I</div> <div>E</div>	X 170, Z 940	BN	•	
ALVA BL 940/170 TR 360° 1200 840 MD IR DALI AN (graphite grey, similar to RAL 7024)	EL10820427	840	1350 lm	17 W	79 lm/W			TR	IP65	DALI		•	<div>LED E E I</div> <div>E</div>	X 170, Z 940	BN	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Electrical accessories					
ACTUATOR FULL AUTO C3 DALI	EP10427473	Modul for the conversion of bus commands from the DALI presence detector and other light controls into switching signals (fully automatic)	X 45, Y 45, Z 24	•	
ACTUATOR SEMI AUTO C4 DALI	EP10427480	Modul for the conversion of bus commands from the DALI presence detector and other light controls into switching signals (semi-automatic)	X 45, Y 45, Z 24	•	
Mounting					
ALVA GROUND SPIKE 100	EL10820182	Ground anchor galvanised for installation of bollard lights in concrete foundation or solid ground	X 90, Z 590	•	★
ALVA GROUND SPIKE 170	EL10820199	Ground anchor galvanised for installation of bollard lights in concrete foundation or solid ground	X 145, Z 590	•	★
Remote control					
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	X 166, Y 24, Z 21,5	•	
REMOTE CONTROL PDI DALI	EP10425899	IR remote control for DALI presence detectors and motion detectors	X 100, Y 50, Z 9	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Spare parts					
Cover					
ALVA BL 940/170 MD LENS MASK	EL00007040	Lens mask for motion detector in bollard luminaires ALVA BL 940/170 MD DALI	X 35, Z 16	•	★
Diffuser					
ALVA BL 940/170 OP DIFFUSOR + GASKETS-SET	EL00007019	Opal diffuser for ALVA BL bollard luminaires Ø 170 mm and 2 sealing rings	X 160, Z 105	•	★
ALVA BL 940/170 TR DIFFUSOR + GASKETS-SET	EL00007002	Transparent diffuser for ALVA BL bollard luminaires Ø 170 mm and 2 sealing rings	X 160, Z 105	•	★
Electrical accessories					
ALVA BL 700/100 ASSEMBLY GROUP DRIVER DALI	EL10521867	DALI driver in housing and connection terminal in housing mounted on a support profile, for ALVA bollard luminaires Ø 170 mm	X 410, Y 80, Z 60	•	★
ALVA BL 700/100 ASSEMBLY GROUP DRIVER MD DALI	EL10521836	DALI driver in housing and terminal block in housing mounted on a support profile, including fixing screw	X 410, Y 80, Z 60	•	★
ALVA BL 700/100 OP 360° 830 HEAD AN	EL10521898	Complete luminaire head for bollard luminaires ALVA BL 700/100 with opal diffuser and with integrated LED board 3000 K.	X 100, Z 125	•	★
ALVA BL 700/100 OP 360° 840 HEAD AN	EL10521805	Complete luminaire head for bollard luminaires ALVA BL 700/100 with opal diffuser and with integrated LED board 4000 K.	X 100, Z 125	•	★
ALVA BL 700/100 TR 360° 830 HEAD AN	EL10521843	Complete luminaire head for bollard luminaires ALVA BL 700/100 with transparent diffuser and with integrated LED board 3000 K.	X 100, Z 125	•	★
ALVA BL 700/100 TR 360° 840 HEAD AN	EL10521812	Complete luminaire head for bollard luminaires ALVA BL 700/100 with transparent diffuser and with integrated LED board 4000 K.	X 100, Z 125	•	★


Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
ALVA BL 940/170 ASSEMBLY GROUP DRIVER DALI	EL10521874	DALI driver in housing and connection terminal in housing mounted on a support profile, for ALVA bollard luminaires Ø 100 mm	X 320, Y 110, Z 95	•	★
ALVA BL 940/170 ASSEMBLY GROUP DRIVER MD DALI	EL10521911	DALI driver in housing and connection terminal in housing mounted on a support profile, including fixing screw, for ALVA BL 940/170 MD DALI.	X 320, Y 110, Z 95	•	★
Motion detectors					
ALVA BL 700/100 MD DALI DETECTOR AN	EL10521850	Complete DALI motion detector with mounting ring and integrated rain protection cap for ALVA BL MD DALI bollard luminaires Ø 100 mm	X 40, Z 60	•	★
ALVA BL 940/170 MD DALI DETECTOR AN	EL10521829	Complete DALI motion detector with lens mask and with rain protection cap for bollard luminaires ALVA BL MD DALI Ø 170 mm	X 33, Z 60	•	★
Mounting					
ALVA BL 700/100 BASE PLATE AN	EL10521881	Base plate for bollard luminaires ALVA BL Ø 100 mm, including 3x screw, 3x dowel	X 100, Z 60	•	★
ALVA BL 940/170 BASE PLATE AN	EL10521904	Base plate for bollard luminaires ALVA BL Ø 170 mm, including 3x screw, 3x dowel	X 170, Z 70	•	★

BM		BN	
	Standard operation.		Standard operation.


DURABLE SYNERG

ALVA OUTDOOR LIGHTS AND DEFENSOR

Even just the matching colour schemes and elegant design of the ALVA outdoor lights from ESYLUX makes them the ideal partner for the DEFENSOR series. Combine the DEFENSOR protection functions with an aluminium housing that is protected against sea air, a high level of impact resistance and the durability of the LEDs used, and you have an intelligent and extremely reliable lighting solution.

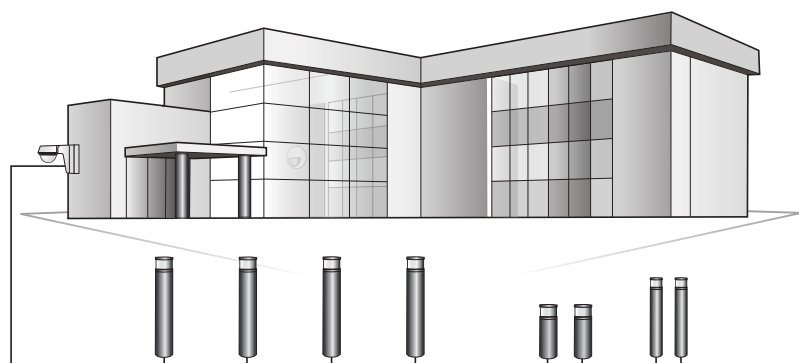

— 230 V

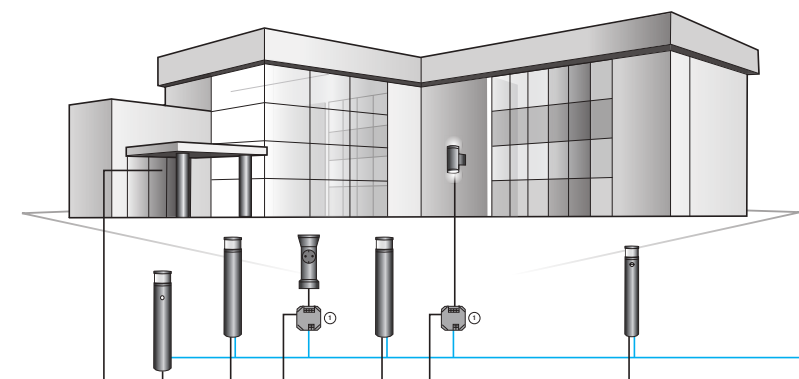

⊙ The DALI actuator (item no. EP10427473 / EP10427480) switches on the "master" light if movement is detected in the field of detection.

— DALI networking

— 230 V

Controlling bollard lights from the ALVA series using a DEFENSOR motion detector creates a lighting solution for outdoor areas that is every bit as intelligent as it is visually harmonious. Alternatively, or even in addition, the ALVA series includes bollard lights with integrated DALI motion detectors, for instance. ▲



Y



ALVA SERIES LED OUTDOOR LIGHTS

- Robust aluminium housing that is protected against sea air
- Dirt-resistant anti-graffiti effect
- Variants with integrated motion detector



- High-quality technology at an entry-level price
- Compact, unobtrusive aluminium housing
- Variants with integrated motion detector

3 YEARS
MANUFACTURER
WARRANTY



The compact floodlights in the BASIC OFL/AFL entry-level series are suitable for the space-saving illumination of traffic routes, garages and squares or the illumination of façades and signs. The optional integrated motion detector enables automatic and energy-efficient operation.

BASIC OFL/AFL

ENERGY EFFICIENCY AT AN ENTRY-LEVEL PRICE

Compact aluminium housing for an unobtrusive installation






Stainless steel ITD special bracket for simple mounting to a wall, inner corner or outer corner

With optional motion detector for motion and daylight dependent switching of light

Protection type IP65



PRODUCT TYPES

										
LIGHT DISTRIBUTION	FIELD OF DETECTION	DETECTION RANGE								
		<table><tr><td></td><td>Wall 8 m</td></tr><tr><td>■ Diagonally (A)</td><td>8 m</td></tr><tr><td>■ Frontal (B)</td><td>3 m</td></tr><tr><td>-</td><td>-</td></tr></table>		Wall 8 m	■ Diagonally (A)	8 m	■ Frontal (B)	3 m	-	-
	Wall 8 m									
■ Diagonally (A)	8 m									
■ Frontal (B)	3 m									
-	-									

C0, C90, C0 / C90

Note: Technical data for specific products can be found at www.esylux.com.

BASIC OFL/AFL

OUTDOOR LIGHTING / FLOODLIGHTS




- Compact aluminium housing for an unobtrusive installation
- Stainless steel ITD special bracket for simple mounting to a wall, inner corner or outer corner
- With optional motion detector for motion and daylight dependent switching of light
- Protection type IP65

Product group/product name	Item no.	Light colour (IEC 1231)	Luminous flux	Rated output P	Luminous efficacy	Unified Glare Rating	Glare suppression	Diffuser	Protection type	Control system	BT (Bluetooth)	Sensor	Energy efficiency class	Dimensions (mm)	Circuit diagram	Core portfolio	New product
3000 K / 10 W																	
BASIC AFL TR 1000 830 MD BK (black, similar to RAL 9005)	EL10810817	830	1000 lm	10 W	100 lm/W	< 30	TR	IP65	ON/OFF	•			F A ↑ G	X 160, Y 170, Z 58	BO	•	
BASIC AFL TR 1000 830 MD WH (white, similar to RAL 9016)	EL10810800	830	1000 lm	10 W	100 lm/W	< 30	TR	IP65	ON/OFF	•			F A ↑ G	X 160, Y 170, Z 58	BO	•	
BASIC OFL TR 1000 830 BK (black, similar to RAL 9005)	EL10810794	830	1000 lm	10 W	100 lm/W	< 30	TR	IP65	ON/OFF				F A ↑ G	X 160, Y 142, Z 28	BO	•	
BASIC OFL TR 1000 830 WH (white, similar to RAL 9016)	EL10810787	830	1000 lm	10 W	100 lm/W	< 30	TR	IP65	ON/OFF				F A ↑ G	X 160, Y 142, Z 28	BO	•	
3000 K / 30 W																	
BASIC AFL TR 3000 830 MD BK (black, similar to RAL 9005)	EL10810855	830	3000 lm	30 W	100 lm/W	< 30	TR	IP65	ON/OFF	•			F A ↑ G	X 215, Y 205, Z 60	BO	•	
BASIC AFL TR 3000 830 MD WH (white, similar to RAL 9016)	EL10810848	830	3000 lm	30 W	100 lm/W	< 30	TR	IP65	ON/OFF	•			F A ↑ G	X 215, Y 205, Z 60	BO	•	
BASIC OFL TR 3000 830 BK (black, similar to RAL 9005)	EL10810831	830	3000 lm	30 W	100 lm/W	< 30	TR	IP65	ON/OFF				F A ↑ G	X 215, Y 205, Z 32	BO	•	
BASIC OFL TR 3000 830 WH (white, similar to RAL 9016)	EL10810824	830	3000 lm	30 W	100 lm/W	< 30	TR	IP65	ON/OFF				F A ↑ G	X 215, Y 205, Z 32	BO	•	
3000 K / 50 W																	
BASIC AFL TR 5000 830 MD BK (black, similar to RAL 9005)	EL10810893	830	5000 lm	47 W	106 lm/W	< 30	TR	IP65	ON/OFF	•			F A ↑ G	X 252, Y 240, Z 60	BO	•	
BASIC AFL TR 5000 830 MD WH (white, similar to RAL 9016)	EL10810886	830	5000 lm	47 W	106 lm/W	< 30	TR	IP65	ON/OFF	•			F A ↑ G	X 252, Y 240, Z 60	BO	•	
BASIC OFL TR 5000 830 BK (black, similar to RAL 9005)	EL10810879	830	5000 lm	47 W	106 lm/W	< 30	TR	IP65	ON/OFF				F A ↑ G	X 252, Y 240, Z 32	BO	•	
BASIC OFL TR 5000 830 WH (white, similar to RAL 9016)	EL10810862	830	5000 lm	47 W	106 lm/W	< 30	TR	IP65	ON/OFF				F A ↑ G	X 252, Y 240, Z 32	BO	•	
4000 K / 10 W																	
BASIC AFL TR 1000 840 MD BK (black, similar to RAL 9005)	EL10810930	840	1000 lm	10 W	100 lm/W	< 30	TR	IP65	ON/OFF	•			E A ↑ G	X 160, Y 170, Z 58	BO	•	


Product group/product name	Item no.	Light colour (IEC 1231)	Luminous flux	Rated output P	Luminous efficacy	Unified Glare Rating	Glare suppression	Diffuser	Protection type	Control system	BT (Bluetooth)	Sensor	Energy efficiency class	Dimensions (mm)	Circuit diagram	Core portfolio	New product
BASIC AFL TR 1000 840 MD WH (white, similar to RAL 9016)	EL10810923	840	1000 lm	10 W	100 lm/W	< 30		TR	IP65	ON/OFF		•		X 160, Y 170, Z 58	BO	•	
BASIC OFL TR 1000 840 BK (black, similar to RAL 9005)	EL10810916	840	1000 lm	10 W	100 lm/W	< 30		TR	IP65	ON/OFF				X 160, Y 142, Z 28	BO	•	
BASIC OFL TR 1000 840 WH (white, similar to RAL 9016)	EL10810909	840	1000 lm	10 W	100 lm/W	< 30		TR	IP65	ON/OFF				X 160, Y 142, Z 28	BO	•	
4000 K / 30 W																	
BASIC AFL TR 3000 840 MD BK (black, similar to RAL 9005)	EL10810732	840	3000 lm	30 W	100 lm/W	< 30		TR	IP65	ON/OFF		•		X 215, Y 205, Z 60	BO	•	
BASIC AFL TR 3000 840 MD WH (white, similar to RAL 9016)	EL10810725	840	3000 lm	30 W	100 lm/W	< 30		TR	IP65	ON/OFF		•		X 215, Y 205, Z 60	BO	•	
BASIC OFL TR 3000 840 BK (black, similar to RAL 9005)	EL10810701	840	3000 lm	30 W	100 lm/W	< 30		TR	IP65	ON/OFF				X 215, Y 205, Z 32	BO	•	
BASIC OFL TR 3000 840 WH (white, similar to RAL 9016)	EL10810718	840	3000 lm	30 W	100 lm/W	< 30		TR	IP65	ON/OFF				X 215, Y 205, Z 32	BO	•	
4000 K / 50 W																	
BASIC AFL TR 5000 840 MD BK (black, similar to RAL 9005)	EL10810770	840	5000 lm	47 W	106 lm/W	< 30		TR	IP65	ON/OFF		•		X 252, Y 240, Z 60	BO	•	
BASIC AFL TR 5000 840 MD WH (white, similar to RAL 9016)	EL10810763	840	5000 lm	47 W	106 lm/W	< 30		TR	IP65	ON/OFF		•		X 252, Y 240, Z 60	BO	•	
BASIC OFL TR 5000 840 BK (black, similar to RAL 9005)	EL10810756	840	5000 lm	47 W	106 lm/W	< 30		TR	IP65	ON/OFF				X 252, Y 240, Z 32	BO	•	
BASIC OFL TR 5000 840 WH (white, similar to RAL 9016)	EL10810749	840	5000 lm	47 W	106 lm/W	< 30		TR	IP65	ON/OFF				X 252, Y 240, Z 32	BO	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Mounting					
FL GROUND SPIKE BK	EL10810558	Wall arm for floodlight, including adapter, black	X 60, Z 265	•	
FL GROUND SPIKE WH	EL10810541	Wall arm for floodlight, including adapter, white	X 60, Z 265	•	
FL WALL ARM 700 BK	EL10810534	Wall arm for floodlight, 700 mm, including adapter, black	X 700, Y 40, Z 40	•	
FL WALL ARM 700 WH	EL10810527	Wall arm for floodlight, 700 mm, including adapter, white	X 700, Y 40, Z 40	•	

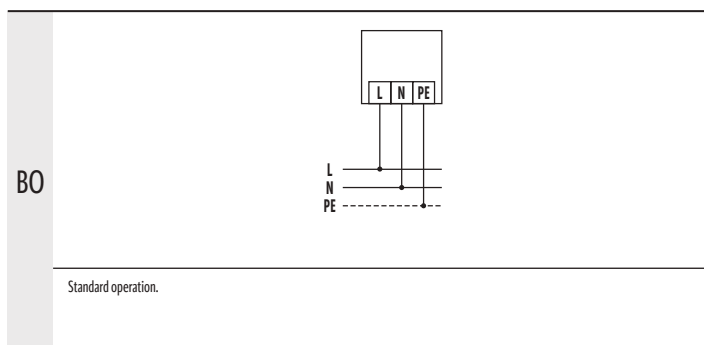

- Separate connection box for easy installation
- Variants with integrated motion detectors, optimised for controlling further LED lights

3 YEARS
MANUFACTURER
WARRANTY

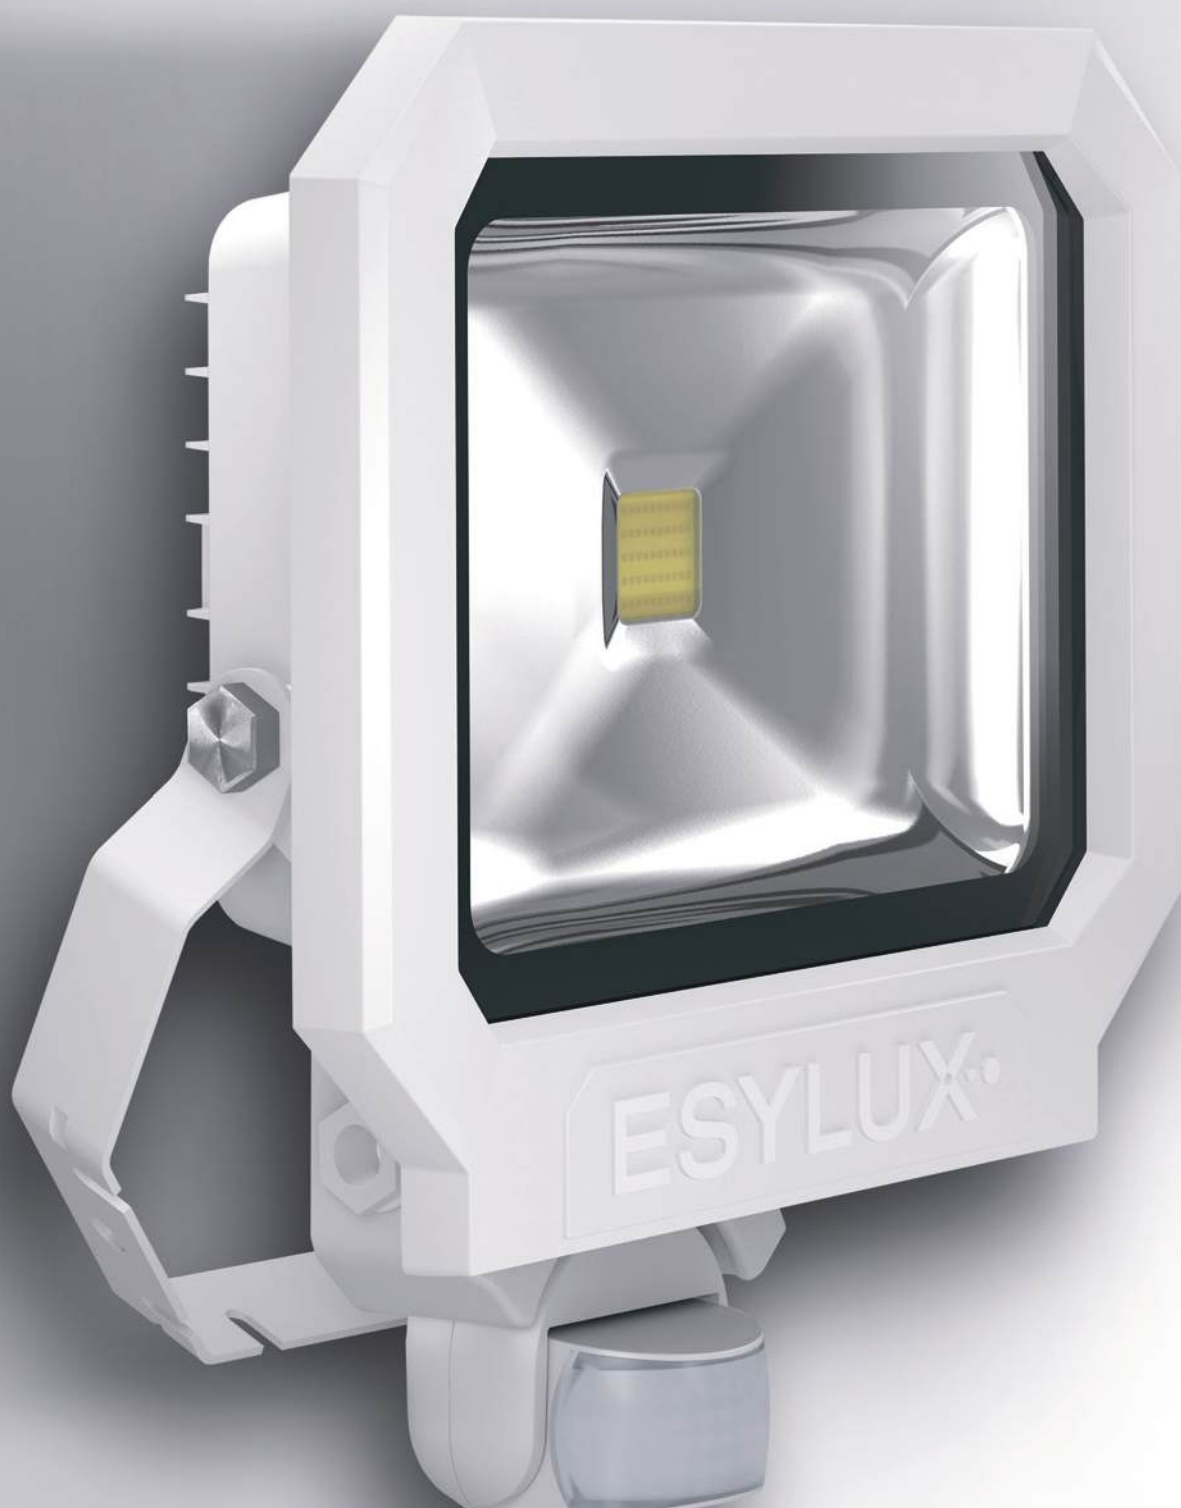

The robust LED floodlights in the SUN OFL/AFL series are suited to brightly illuminating traffic routes, squares and garages — or for illuminating façades, signs and billboards. The optional motion detector provides automatic and therefore energy-efficient, convenient operation, while clever details simplify installation.

SUN OFL/AFL

ROBUST, DURABLE AND EVEN MORE EFFICIENT AS A GROUP

High-quality die-cast aluminium housing, stainless steel external screws

Easy installation with separate connection box (no need to open light housing)

Stainless steel, special ITD bracket for simple mounting on walls, inner corners or outer corners

Variants with integrated motion detectors for motion and daylight dependent light switching

Motion detector with zero-cross switching to protect the relay








Simple adjustment of the range and field of detection due to the revolving and tilting detector axis

Motion detector with switching output for master/master or master/slave networking

Protection type IP65

Overtvoltage protection category II (up to 2.5 kV)

PRODUCT TYPES

											
LIGHT DISTRIBUTION		FIELD OF DETECTION	DETECTION RANGE								
 <p>10 W</p>	 <p>30/50 W</p>		<table><tr><td></td><td>Wall 12 m</td></tr><tr><td>■ Diagonally (A)</td><td>12 m</td></tr><tr><td>■ Frontal (B)</td><td>5 m</td></tr><tr><td>-</td><td>-</td></tr></table>		Wall 12 m	■ Diagonally (A)	12 m	■ Frontal (B)	5 m	-	-
	Wall 12 m										
■ Diagonally (A)	12 m										
■ Frontal (B)	5 m										
-	-										

■ C0, ■ C90, ■ C0 / C90

Note: Technical data for specific products can be found at www.esylux.com.

SUN OFL/AFL

OUTDOOR LIGHTING / FLOODLIGHTS



- High-quality die-cast aluminium housing, stainless steel external screws
- Easy installation with separate connection box (no need to open light housing)
- Stainless steel, special ITD bracket for simple mounting on walls, inner corners or outer corners
- Variants with integrated motion detectors for motion and daylight dependent light switching
- Motion detector with zero-cross switching to protect the relay
- Simple adjustment of the range and field of detection due to the revolving and tilting detector axis
- Motion detector with switching output for master/master or master/slave networking
- Protection type IP65
- Overvoltage protection category II (up to 2.5 kV)

Product group/product name	Item no.	Light colour (IEC 1231)	Luminous flux	Rated output P	Luminous efficacy	Unified Glare Rating	Glare suppression	Diffuser	Protection type	Control system	BT (Bluetooth)	Sensor	Energy efficiency class	Dimensions (mm)	Circuit diagram	Core portfolio	New product
3000 K / 10 W																	
SUN AFL TR 900 830 MD BK (black, similar to RAL 9005)	EL10810039	830	900 lm	9,7 W	92 lm/W			TR	IP65	ON/OFF		•	LED EEI E	X 210, Y 133, Z 75	BP	•	
SUN AFL TR 900 830 MD WH (white, similar to RAL 9016)	EL10810022	830	900 lm	9,7 W	92 lm/W			TR	IP65	ON/OFF		•	LED EEI E	X 210, Y 133, Z 75	BP	•	
SUN OFL TR 900 830 BK (black, similar to RAL 9005)	EL10810015	830	900 lm	9,7 W	92 lm/W			TR	IP65	ON/OFF			LED EEI E	X 150, Y 133, Z 75	BQ	•	
SUN OFL TR 900 830 WH (white, similar to RAL 9016)	EL10810008	830	900 lm	9,7 W	92 lm/W			TR	IP65	ON/OFF			LED EEI E	X 150, Y 133, Z 75	BQ	•	
3000 K / 30 W																	
SUN AFL TR 3400 830 MD BK (black, similar to RAL 9005)	EL10810138	830	3400 lm	30 W	113 lm/W			TR	IP65	ON/OFF		•	LED EEI E	X 290, Y 250, Z 86	BP	•	
SUN AFL TR 3400 830 MD WH (white, similar to RAL 9016)	EL10810121	830	3400 lm	30 W	113 lm/W			TR	IP65	ON/OFF		•	LED EEI E	X 290, Y 250, Z 86	BP	•	
SUN OFL TR 3400 830 BK (black, similar to RAL 9005)	EL10810114	830	3400 lm	30 W	113 lm/W			TR	IP65	ON/OFF			LED EEI E	X 267, Y 252, Z 86	BQ	•	
SUN OFL TR 3400 830 WH (white, similar to RAL 9016)	EL10810107	830	3400 lm	30 W	113 lm/W			TR	IP65	ON/OFF			LED EEI E	X 267, Y 252, Z 86	BQ	•	
3000 K / 50 W																	
SUN AFL TR 5100 830 MD BK (black, similar to RAL 9005)	EL10810237	830	5100 lm	48 W	106 lm/W			TR	IP65	ON/OFF		•	LED EEI E	X 290, Y 250, Z 86	BP	•	
SUN AFL TR 5100 830 MD WH (white, similar to RAL 9016)	EL10810220	830	5100 lm	48 W	106 lm/W			TR	IP65	ON/OFF		•	LED EEI E	X 290, Y 250, Z 86	BP	•	
SUN OFL TR 5100 830 BK (black, similar to RAL 9005)	EL10810213	830	5100 lm	48 W	106 lm/W			TR	IP65	ON/OFF			LED EEI E	X 267, Y 252, Z 86	BQ	•	
SUN OFL TR 5100 830 WH (white, similar to RAL 9016)	EL10810206	830	5100 lm	48 W	106 lm/W			TR	IP65	ON/OFF			LED EEI E	X 267, Y 252, Z 86	BQ	•	
5000 K / 10 W																	
SUN AFL TR 1000 850 MD BK (black, similar to RAL 9005)	EL10810084	850	1000 lm	9,7 W	103 lm/W			TR	IP65	ON/OFF		•	LED EEI E	X 210, Y 133, Z 75	BP	•	


Product group/product name	Item no.	Light colour (IEC 1231)	Luminous flux	Rated output P	Luminous efficacy	Unified Glare Rating	Glare suppression	Diffuser	Protection type	Control system	BT (Bluetooth)	Sensor	Energy efficiency class	Dimensions (mm)	Circuit diagram	Core portfolio	New product
SUN AFL TR 1000 850 MD WH (white, similar to RAL 9016)	EL10810077	850	1000 lm	9,7 W	103 lm/W			TR	IP65	ON/OFF		•	LED EEI E	X 210, Y 133, Z 75	BP	•	
SUN OFL TR 1000 850 BK (black, similar to RAL 9005)	EL10810060	850	1000 lm	9,7 W	103 lm/W			TR	IP65	ON/OFF			LED EEI E	X 150, Y 133, Z 75	BQ	•	
SUN OFL TR 1000 850 WH (white, similar to RAL 9016)	EL10810053	850	1000 lm	9,7 W	103 lm/W			TR	IP65	ON/OFF			LED EEI E	X 150, Y 133, Z 75	BQ	•	
5000 K / 30 W																	
SUN AFL TR 3700 850 MD BK (black, similar to RAL 9005)	EL10810183	850	3700 lm	30 W	123 lm/W			TR	IP65	ON/OFF		•	LED EEI E	X 290, Y 250, Z 86	BP	•	
SUN AFL TR 3700 850 MD WH (white, similar to RAL 9016)	EL10810176	850	3700 lm	30 W	123 lm/W			TR	IP65	ON/OFF		•	LED EEI E	X 290, Y 250, Z 86	BP	•	
SUN OFL TR 3700 850 BK (black, similar to RAL 9005)	EL10810169	850	3700 lm	30 W	123 lm/W			TR	IP65	ON/OFF			LED EEI E	X 267, Y 252, Z 86	BQ	•	
SUN OFL TR 3700 850 WH (white, similar to RAL 9016)	EL10810152	850	3700 lm	30 W	123 lm/W			TR	IP65	ON/OFF			LED EEI E	X 267, Y 252, Z 86	BQ	•	
5000 K / 50 W																	
SUN AFL TR 5400 850 MD BK (black, similar to RAL 9005)	EL10810282	850	5400 lm	48 W	112 lm/W			TR	IP65	ON/OFF		•	LED EEI E	X 290, Y 250, Z 86	BP	•	
SUN AFL TR 5400 850 MD WH (white, similar to RAL 9016)	EL10810275	850	5400 lm	48 W	112 lm/W			TR	IP65	ON/OFF		•	LED EEI E	X 290, Y 250, Z 86	BP	•	
SUN OFL TR 5400 850 BK (black, similar to RAL 9005)	EL10810268	850	5400 lm	48 W	112 lm/W			TR	IP65	ON/OFF			LED EEI E	X 267, Y 252, Z 86	BQ	•	
SUN OFL TR 5400 850 WH (white, similar to RAL 9016)	EL10810251	850	5400 lm	48 W	112 lm/W			TR	IP65	ON/OFF			LED EEI E	X 267, Y 252, Z 86	BQ	•	

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Mounting					
FL GROUND SPIKE BK	EL10810558	Wall arm for floodlight, including adapter, black	X 60, Z 265	•	
FL GROUND SPIKE WH	EL10810541	Wall arm for floodlight, including adapter, white	X 60, Z 265	•	
FL WALL ARM 700 BK	EL10810534	Wall arm for floodlight, 700 mm, including adapter, black	X 700, Y 40, Z 40	•	
FL WALL ARM 700 WH	EL10810527	Wall arm for floodlight, 700 mm, including adapter, white	X 700, Y 40, Z 40	•	


BP

Standard operation with optional connection of external loads.

BQ



Standard operation.



Standard operation with on/off switch.



DALI-2 TAKES YOU

ONE STANDARD FOR ALL OPTIONS

If you're looking to install an intelligent light control system in offices, educational institutions and health facilities, it's now impossible to ignore the DALI international industry standard.

With the ability to address and control lights and lighting groups individually, this digital communication protocol offers users an unparalleled level of flexibility. Its planning and installation functions are also much less complicated than those of conventional lighting systems and users can update the configuration via software without having to update any hardware.

CROSS-MANUFACTURER INTEROPERABILITY

The development of the standard into DALI-2 ensures it will continue to have a secure future. The functionality of the standard has been improved even further, ensuring interoperability between devices from different manufacturers. This allows project managers to create a solution using the very best devices.

DALI-2 presence detectors from ESYLUX are the number one choice for control. These detectors increase quality of life and energy efficiency in any workplace, offer the largest variety of functions in a compact design and enable easy configuration via the ESY-App!

WHY YOU WILL BENEFIT FROM DALI-2

- Internationally established, open industry standard
- Cross-manufacturer interoperability
- Individual addressing and control:
 - Up to 64 operating devices, 64 control units and input devices
 - Up to 16 groups
 - Up to 16 scenes
- Reconfiguration via software without the need to update any hardware
- Bi-directional communication with status feedback
- Robust bus communication with collision detection
- Can be used as a sub-system (e.g. with KNX)
- Optimal dimming of LED lighting
- Fewer materials and less effort needed for installation:
 - Only one cable for all devices (incl. control wires and power supply)
 - Existing wiring can often be re-used
 - Cables can be arranged in line, star or tree topologies
 - Polarity-free wiring
 - Groups are established via software without any wiring requirements

TO THE FUTURE

CROSS-ROOM DECENTRALISED CONTROL

Benefits of decentralised control from ESYLUX:

- Lower system costs as a cost-effective BMS presence detector can be easily integrated
- No switch cabinet components or need to modify the switch cabinet components
- Easy commissioning and configuration via smartphone (no need for a tablet, PC or special software)
- Adapt to changing room situations without any additional hardware thanks to flexible group switching
- Up to 90 % faster documentation as all project settings are automatically saved via the app



INTELLIGENT AND POWERFUL

200

An overview of the advantages of the decentralised DALI-2 solution from ESYLUX



CROSS-ROOM CONTROL

202

APC presence detectors with decentralised control combined with BMS presence detectors as input devices



FUNCTIONAL ADVANTAGE FOR EVERY ZONE

206

Flexible group control of APC presence detectors

CENTRAL BUILDING CONTROL



SMART INPUT ON ALL LEVELS

208

BMS presence detectors in building management systems from third-party providers

SINGLE-ROOM CONTROL



SIMPLE DALI: BROADCAST

210

Single-room solution without addressing

INTELLIGENT AND THE DECENTRALISED DALI-2 SOLUTION FROM ESYLUX

OPTIMAL LIGHTING CONDITION WITH MAXIMUM ENERGY EFFICIENCY

Presence and light sensor technology from ESYLUX enables the best lighting conditions and energy-efficient implementation in every workplace. Depending on the variant used, this is achieved via:

- SymbiLogic technology for energy-efficient Human Centric Lighting (HCL)
- Presence and daylight dependent constant light control

CROSS-ROOM CONTROL OF UP TO 16 GROUPS

The APC presence detectors (APC: Application Controller) feature a built-in control unit and bus power supply for controlling up to 64 control gears in up to 16 light groups and offer numerous configuration options, including:

- Swarm function
- Flexible group switching for when room usage changes
- Light closed loop control with offset
- Orientation light

SIMPLE MANUAL OVERRIDE

Via 230V or DALI-2 push buttons the user can override the automation at any time according to his wishes:

- Up to 16 scenes for different situations
- Adjust the level of brightness as well as the light colour using SymbiLogic
- Adjust the set point for the level of brightness by manual dimming (automation is resumed)
- Individually configurable: DALI-2 detectors with push button inputs or separate DALI-2 push buttons with up to 8 single push buttons

POWERFUL



ENERGY-EFFICIENT SWITCHING

The additional switching output of the APC detector enables conventional devices to be integrated and activated dependent on presence. For instances such as:

- Switching of HVAC, 230V devices or conventional lights
- Switch-off of DALI control gears (standby switch-off)

CONTROL BASED ON THE DAY OF THE WEEK AND TIME OF THE DAY

As different levels of lighting are needed at different times, DALI-2 solutions from ESYLUX offer time-dependent control for:

- Different operating modes
- Afterglow and orientation light
- Night operation

SPECIAL FUNCTIONS

Rooms have different requirements depending on their usage. It is therefore useful that the following can be controlled via buttons:

- Central functions
- Alarm functions

EASY TO CONFIGURE VIA SMARTPHONE AND ESY-APP

CROSS-ROOM CO

APC PRESENCE DETECTOR WITH BUILT-IN CONTROL UNIT

The APC presence detectors (APC: Application Controller) act as the intelligent switch cabinets in DALI-2 solutions from ESYLUX and use the full potential of the standard. These detectors combine a control unit, bus power supply, multi-sensor technology and push button input and enable autonomous, cross-room control of up to 16 groups without the need for a complex building automation system.

Furthermore, the components are bundled in a single housing, making planning and installation much easier. Several configurations are available, enabling numerous functions for comfort and energy efficiency.



COMPACT AND POWERFUL

- Built-in DALI control unit and DALI bus power supply (250 mA)
- Passive infrared presence detectors offer presence detection and light sensor technology
- Integrated switching output for HVAC devices or supplementary lighting (16 A relay, potential-free)
- Quick installation in suspended ceilings using a standard drill bit and without additional accessories (Ø 68 mm)
- Detection range of Ø 8, 24 and 32 m
- Bi-directional communication via built-in Bluetooth module
- Four inputs for conventional push buttons (non-floating):
 - Existing 230 V buttons can be used directly!
- Alternatively: DALI-2 push buttons from ESYLUX can be integrated via DALI bus



NTROL

UP TO 16 LIGHTING GROUPS

- Individual control of up to 64 operating devices in up to 16 groups
- Fully automatic, semi-automatic, manual override (16 scenes)
- Presence and daylight dependent constant light control
- Group control with offset possible
- Manual adjustment of the set point of the level of brightness
- Basic lighting formed of afterglow and orientation light
- Flexible group switching
- Switching of HVAC and 230 V lights

TIME FUNCTIONS

- Control based on the day of the week and the time of the day
- Automatic brightness control
- Stairwell light automation
- Standby switch-off
- Swarm function
- Central functions

HUMAN CENTRIC LIGHTING

- SymbiLogic (energy-efficient HCL)
- Night operation
- Alarm functions

COMPACT
APC30 HCL



COMPACT
APC20




COMPACT
APC10



APC PRESENCE DETECTOR – DALI-2 BUS COMMUNICATION

APC presence detectors (APC: Application Controller = control unit) from ESYLUX combine the most important features in a single device. Using sensor technology, they detect presence and brightness and overtake the direct control of the operating devices at the same time.

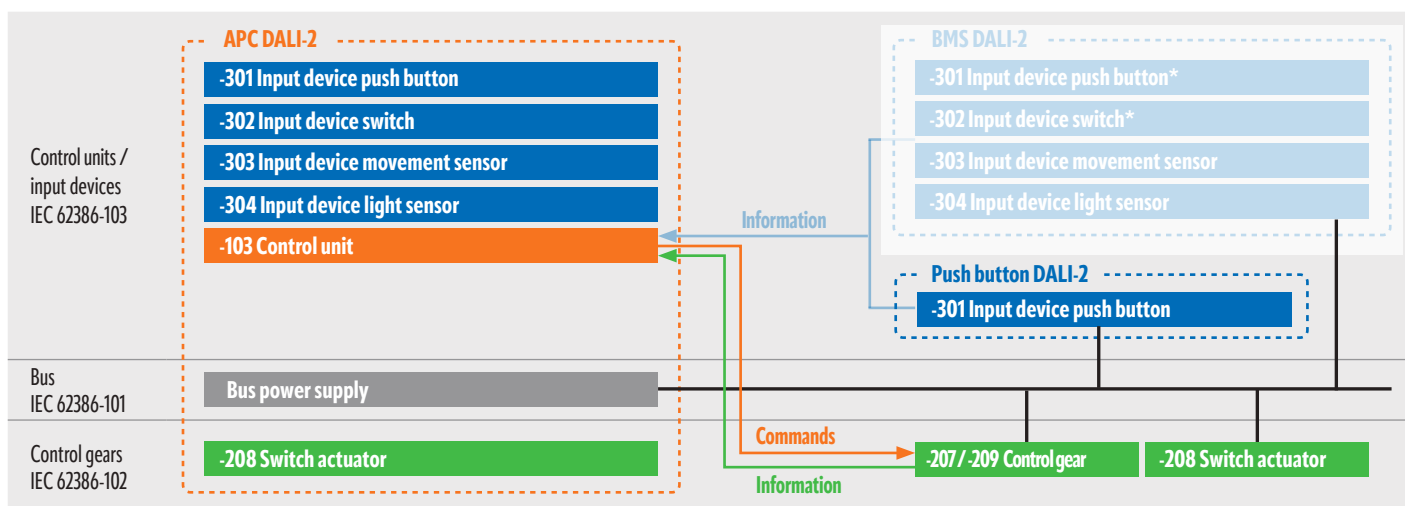

* Not included in the COMPACT MINI BMS DALI-2 detector.

BMS PRESENCE DETECTORS AS INPUT DEVICES

BMS presence detectors (BMS: Building Management System) supplement the APC presence detector (APC: Application Controller) of a system as this detector only detects presence and measures brightness in its own room zone.

Using built-in presence and light sensors and additional push button inputs, BMS presence detectors (BMS: Building Management System) supply the necessary information to all other areas, setting the foundation for all 16 groups to be controlled individually. The design variants from the COMPACT, FLAT and COMPACT MINI series offer solutions for a wide range of visual requirements.

COMPACT SERIES

- Integrated presence and light sensors
- Two-piece housing for simple installation
- Two potential-free inputs for conventional switches
- Detection ranges of Ø 8, 24 or 32 m

FLAT SERIES

- Integrated presence and light sensors
- Flat, elegant design (round or rectangular)
- One potential-free input for conventional switches
- Detection range of Ø 8 m


COMPACT MINI SERIES

- Integrated presence and light sensors
- Particularly compact design for unobtrusive operation
- Detection range of Ø 8 m



BMS PRESENCE DETECTOR – DALI-2 BUS COMMUNICATION

Using built-in presence and light sensors as well as push button inputs, BMS presence detectors (BMS: Building Management System) combine all the important input devices in line with the DALI-2 standard in a single housing, making planning and installation easier.

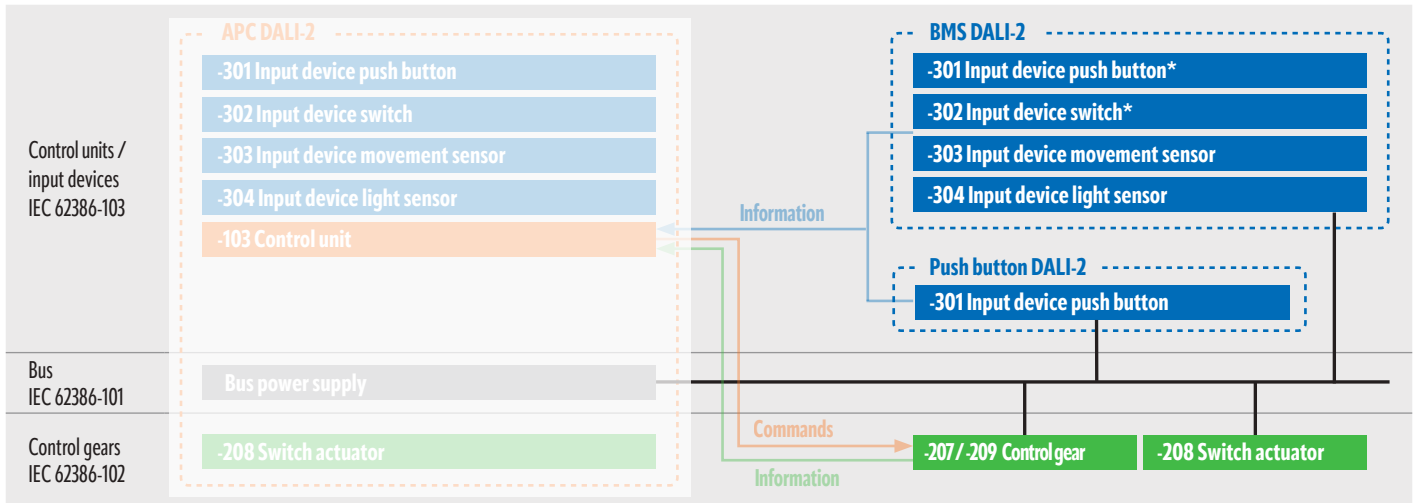

* Not included in the COMPACT MINI BMS DALI-2 detector.

SIMPLE CONFIGURATION VIA THE ESY-APP

GROUP AND CONFIGURE DECENTRALISED DALI-2 SOLUTIONS VIA THE APC PRESENCE DETECTOR

The intuitive ESY-App from ESYLUX allows users to configure lighting systems in no time at all. With quick detection of addressed devices, grouping via the quick assignment function and the scene editor, DALI has never been so easy!


The ESY-App is able to communicate with the APC presence detector (APC: Application Controller) of whichever system has stored the settings. The system's Bluetooth module is capable of bidirectional communication, meaning parameters can be both configured and read out directly via smartphone.



FUNCTIONAL ADVANT

FLEXIBLE GROUP CONTROL OF APC PRESENCE DETECTORS

Whether using the swarm function, orientation light or time-controlled night operation, all users in any building can benefit from a light control that is tailored to meet the requirements of the given area. The APC presence detectors (APC: Application Controller) can be combined with the BMS presence detector (BMS: Building Management System) to form intelligent lighting groups in all sections and offer a variety of functions for individual lighting in every room zone as required.

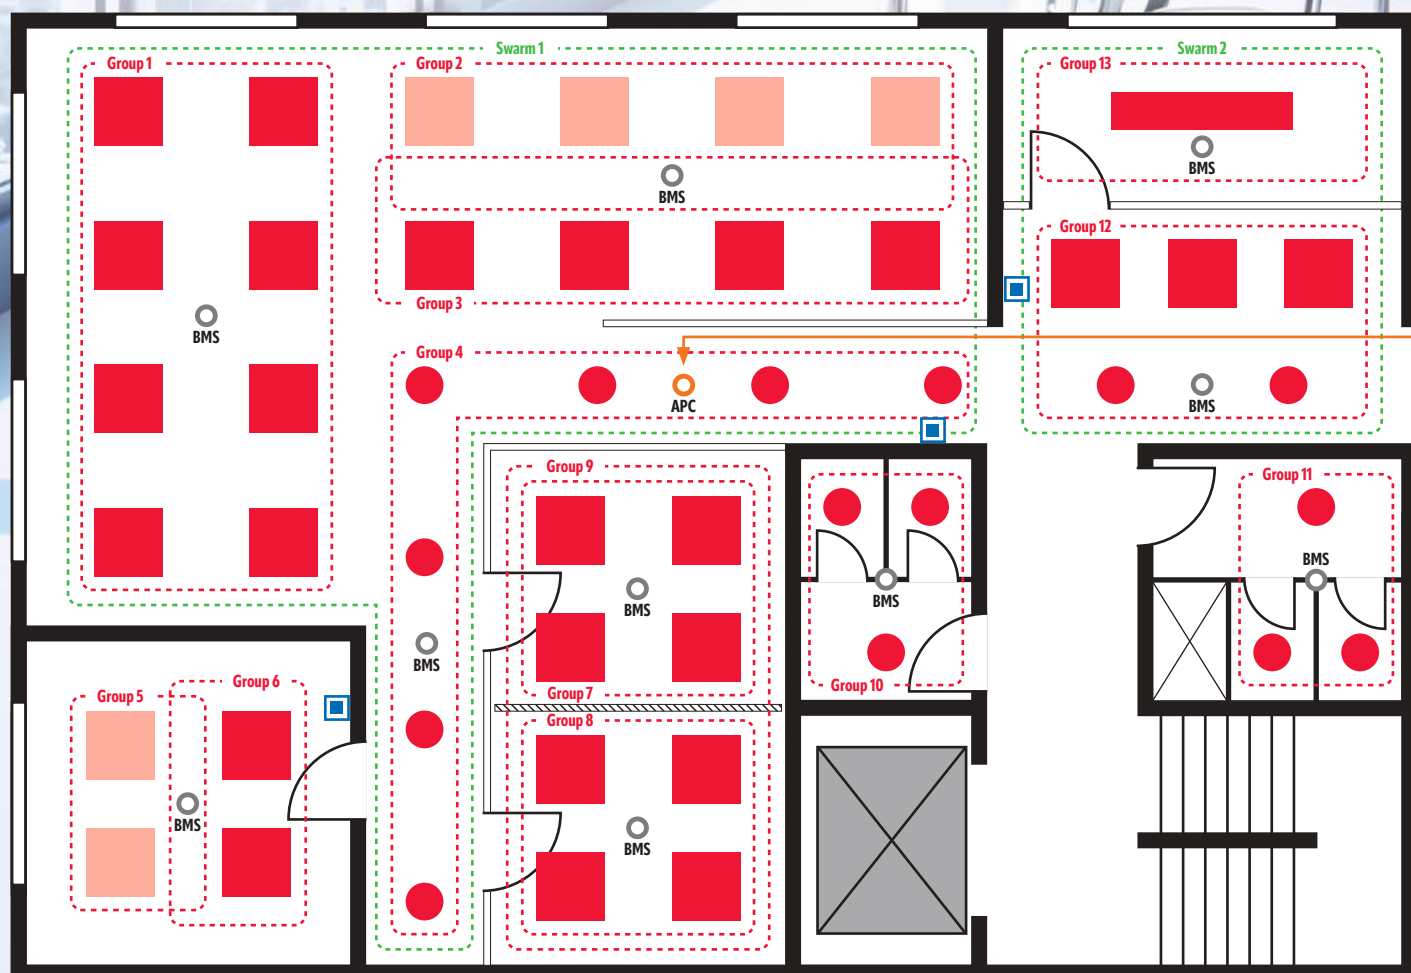

AGE FOR EVERY ZONE

- Lights
- Presence detector
- DALI-2 Push button

In this example, the APC presence detector controls 47 luminaires in 13 groups within a section of building (up to 64 luminaires in 16 groups are possible)

- Group 1, 2, 3 Open-plan office
- Group 4 Corridor
- Group 5, 6 Single office
- Group 7, 8, 9 Meeting room 1 (with partition)
- Group 10, 11 WC
- Group 12 Reception area
- Group 13 Meeting room 2

Quantity	Product name	Item no.
1	PD-C 360bt/8 APC10 PS plus DALI-2	EP10428142
2	PD-C 360/24 BMS DALI-2	EP10428210
3	PD-C 360/8 BMS DALI-2	EP10428203
5	PD-C 360/8 mini BMS DALI-2	EP10423048
31	CELINE-2 PNL 600 DDP OP 4000 840 IP20 ELC	EQ10132315
31	DRIVER-SET 30W RJ45 DALI-2	EQ10127793
3	PUSH BUTTON x8 DALI-2 WH	EP10431630
15	ELSA-2 DL 225 OP 110° 1800 840 WH DALI	E010298950



ESYLUX DALI-2 CONCEPT & FUNCTIONS



The full functional scope of the APC presence detector can be found in the "DALI-2 Concept & Functions" brochure. Simply scan the QR code or visit our website at www.esylux.com.



SMART INP



COMPACT SERIES



FLAT SERIES



COMPACT MINI SERIES

OVERVIEW OF THE BMS PRESENCE DETECTOR

- Easy to integrate in third-party building management systems, such as those from Beckhoff, Wago, Sauter or Helvar (Router 950) as input devices
- Integrated presence and light sensors
- Compact, flat or particularly small series design
- Detection range of Ø 8 m (FLAT, COMPACT MINI) or of Ø 8 m, 24 and 32 m (COMPACT)
- Potential-free inputs for conventional switches (2x COMPACT, 1x FLAT):



Existing 230 V buttons can be used directly!

- Alternatively: DALI-2 push buttons from ESYLUX can be integrated via DALI bus



Available with up to 8 single push buttons

UT ON ALL LEVELS

BMS PRESENCE DETECTORS IN BUILDING MANAGEMENT SYSTEMS

Many large, modern office buildings use building management systems with a central control function. BMS presence detectors (BMS: Building Management System) from ESYLUX feature field-tested high-quality sensors, making them a top choice for building system management as they reliably supply the control unit with all the necessary information. Furthermore, the FLAT and COMPACT MINI variants are the ideal solutions for spaces with sophisticated design features.



SIMPLE DALI: BRO

SINGLE-ROOM SOLUTIONS WITHOUT ADDRESSING

As existing buildings are modernised to be more energy-efficient, project managers sometimes have to work through the building room by room. ESYLUX solutions with DALI Broadcast offer the ideal sensor solution for this type of scenario.

The sensors do not need to be addressed, are ready to use instantly without having to change the factory settings and when combined with DUO DALI presence detectors from the COMPACT series, offer solutions with two light channels and an energy-efficient offset.


EXAMPLE OF APPLICATION IN A CLASSROOM

In constant lighting control concepts for lighting systems with lights near to and far from windows, an offset between the light channels ensures optimal lighting conditions and improved energy efficiency.



ACTUATOR FULL AUTO C3 DALI
ACTUATOR SEMI AUTO C4 DALI

ESYLUX actuators supplement all Broadcast presence detectors by up to two switching channels (screens, interactive boards, accent lighting or HVAC). The lights and actuators can be operated as a fully automatic or semi-automatic system.

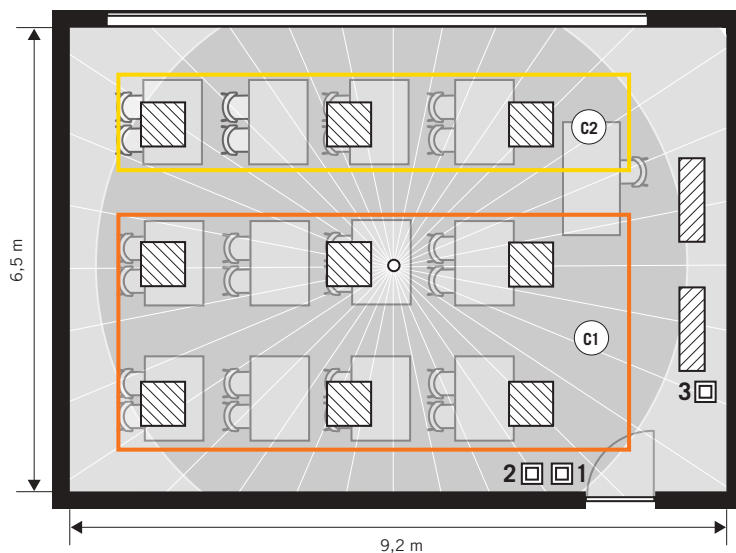


ADCAST

DOWNWARD COMPATIBILITY DALI-2 TO DALI

Due to backwards compatibility, DALI-2 control gear can also recognise and interpret DALI commands.

This means ESYLUX DALI Broadcast detectors can also be used in lighting systems with DALI-2 lights and operating devices.

The DALI-2 operating devices can interpret and follow the DALI commands from the detectors without any issues.

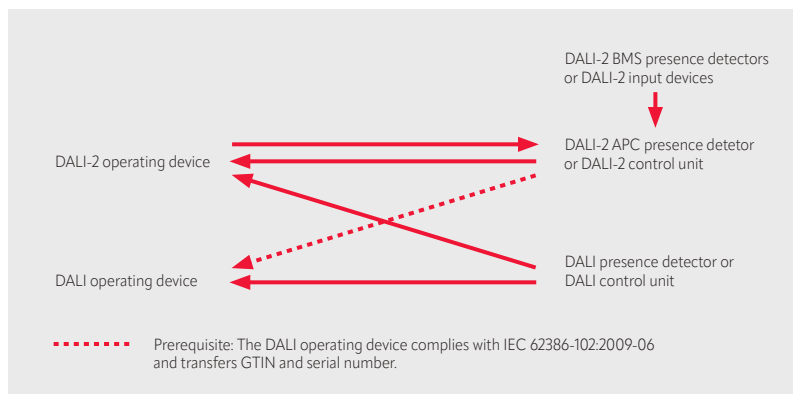

DUO DALI PRESENCE DETECTORS WITH TWO BROADCAST CHANNELS

- Presence and daylight dependent constant light control
- Control of two lighting systems with offset
- Integrated bus power supply for up to 25 operating devices per light channel
- Switch off warning, orientation light and night light
- Up to two additional switching channels with a DALI actuator as an accessory
- Two push button inputs for manual control
- Temporary override by remote control
- Ready for use immediately with factory settings
- Low energy consumption



PD-C 360i/32 DUO DALI
PD-C 360i/24 DUO DALI



PD-C 360i/8 DUO DALI



PD-FLAT 360i/8 ROUND WHITE DALI
PD-FLAT 360i/8 ROUND BLACK DALI



PD-FLAT 360i/8 SQUARE WHITE DALI
PD-FLAT 360i/8 SQUARE BLACK DALI



PD-C 360i/8 mini DALI



PD-FLAT 360i/6 mini DALI

PRESENCE DETECTOR WITH ONE BROADCAST CHANNEL

- Presence and daylight dependent constant light control
- Up to two additional switching channels with a DALI actuator as an accessory
- Push button input for manual control
- Temporary override by remote control
- Orientation light
- Ready for use immediately with factory settings
- Bus power supply as an accessory

ESYLUX LIGHT CO

INSTALL INTELLIGENT LIGHT ON A ROOM-BY-ROOM BASIS USING PLUG AND PLAY

- Lighting systems consisting of ELC ceiling lights, ELC control units, ELC presence detectors and accessories
- Simple installation, grouping, scaling and networking with low risk of error using plug and play
- Ready for use immediately with no programming required
- Energy-efficient Human Centric Lighting using SymbiLogic technology
- Alternatively with fixed light colour and presence- and daylight-dependent constant light control
- Freely configurable or in a preconfigured set
- Cost-efficient solution for room-by-room future-proof modernisation in offices, educational institutions and health facilities

CONTROL ELC

It has never been easier to equip workplaces with optimal lighting systems: Lighting systems with ESYLUX Light Control ELC can be installed, grouped, scaled and networked using plug and play – the perfect concept for times when the support of a skilled professional is unavailable, with a time saving of up to 60 %. ELC technology makes the work of installers and planners easier and its intelligent lighting control ensures maximum quality of life, economy and sustainable energy efficiency.

Up to **60 %**
time savings due to
plug and play

Can also be installed by
non-skilled personnel


Up to **90 %**
fewer 230 V
connections
using SELV



INCREASES
QUALITY OF LIFE
ROI OF THE PROPERTY
ENERGY EFFICIENCY
FLEXIBILITY OF USE



REDUCES
INVESTMENT COSTS
OPERATING COSTS
INSTALLATION WORK
MAINTENANCE WORK

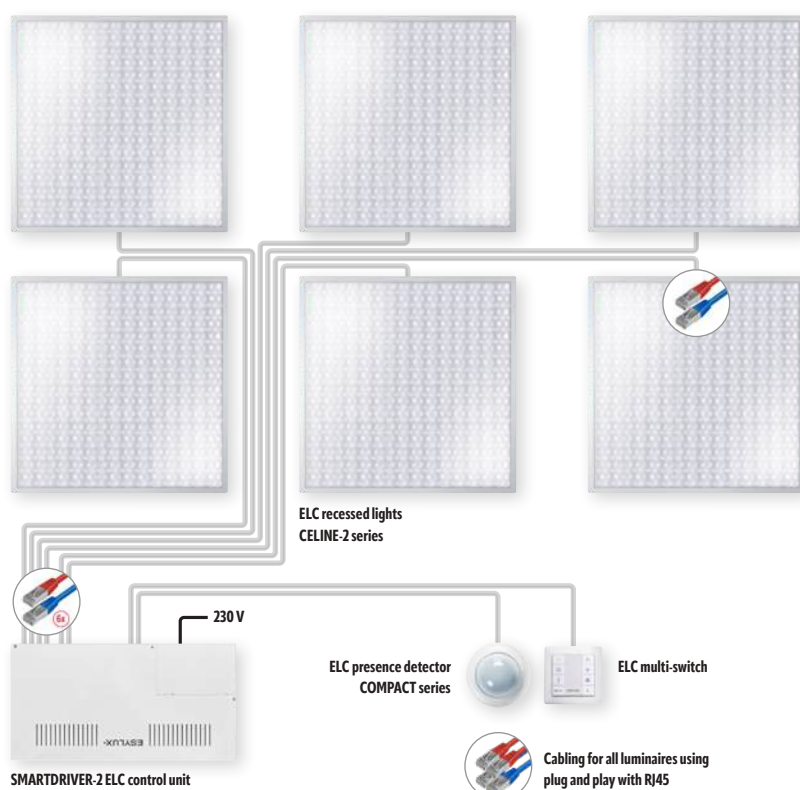

The SMARTDRIVER-2 control unit contains the power supply for the system luminaires and the system sensors, which is why they can be connected easily using plug and play.

ESYLUX LIGHT CONTROL ELC CONCEPT & FUNCTIONS



The full functional scope on the subject of ELC can be found in the "ELC Concept & Functions" brochure. Simply scan the QR code or visit our website at www.esylux.com.



OPTIMAL LIGHTING CO

INTELLIGENTLY CONTROLLED: ENERGY ONLY WHEN IT'S NEEDED

2700 – 6500 K


TUNABLE WHITE FOR ENERGY-EFFICIENT HUMAN CENTRIC LIGHTING WITH SYMBILOGIC

Human Centric Lighting is the optimal lighting for people indoors. It uses brightness and colour that imitate daylight to improve well-being, vitality and concentration levels. It also stabilises circadian rhythms, improves sleep and benefits health.

ESYLUX developed SymbiLogic technology to enable Human Centric Lighting to be implemented in an energy-efficient and sustainable manner: It uses presence- and daylight-dependent adaptive HCL light control and represents the latest form of the tried-and-tested concept of constant light control indoors. People in the workplace simply feel better – and the intelligent controls not only save users money, but also conserve natural resources.




CIRCADIAN CYCLES FOR OFFICE APPLICATIONS

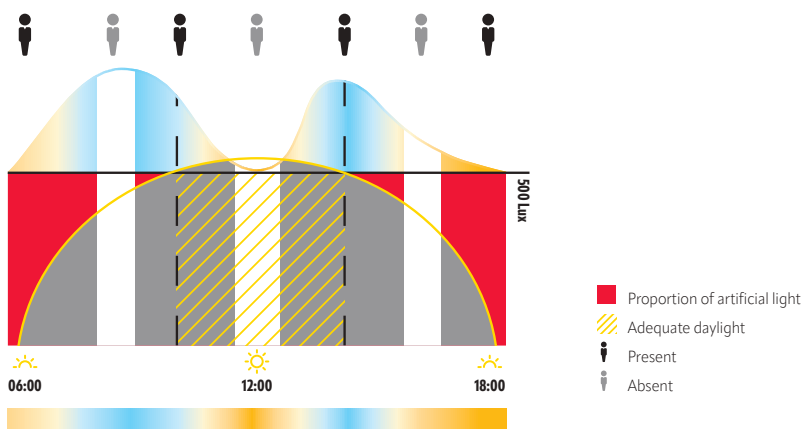

By altering the illuminance and light colour in the middle of the day, the circadian cycles for offices help to effectively combat midday fatigue.

OR FOR HEALTH FACILITIES AND EDUCATIONAL INSTITUTIONS

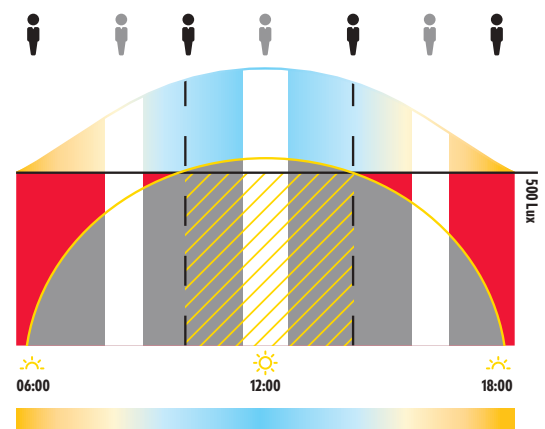

Alternatively, SymbiLogic offers a lighting sequence that ideally emulates the natural characteristics of a sunny day. This sequence is ideal for care homes or higher education institutions.

CONDITIONS FOR WORK


3000 K / 4000 K

FIXED LIGHT COLOUR FOR PRESENCE- AND DAYLIGHT-DEPENDENT CONSTANT LIGHT CONTROL

An intelligent light control system switches the lighting on only when people are detected and sets the necessary level of brightness based on the current level of daylight. The result is presence- and daylight-dependent constant light control – the most energy-efficient control concept for lighting with a fixed light colour.

ESYLUX presence detectors use tried-and-tested high-quality sensor technology for this purpose. They use radiation-free passive infrared technology to detect human presence and a built-in light sensor to reliably measure the current level of brightness in the workplace. Not only does this reduce energy usage, it also increases the level of comfort. It's one less thing for workers to worry about, allowing them to concentrate fully on the task at hand.

PRESENCE- AND DAYLIGHT-DEPENDENT CONSTANT LIGHT CONTROL

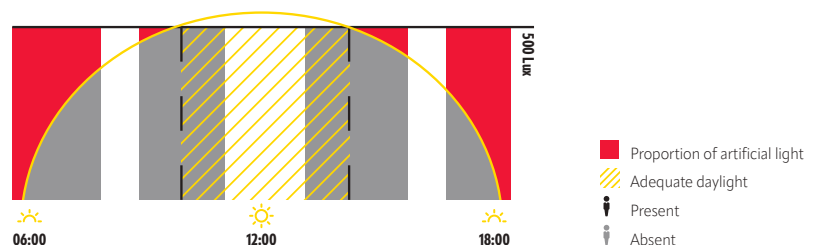


The most energy-efficient form of light control: presence- and daylight-dependent constant light control using a presence detector.

CONNECT. START.

SYMBILOGIC (LIGHT COLOUR: TUNABLE WHITE)

2700 – 6500 K


SYMBILOGIC™ FOR ENERGY-EFFICIENT
HUMAN CENTRIC LIGHTING

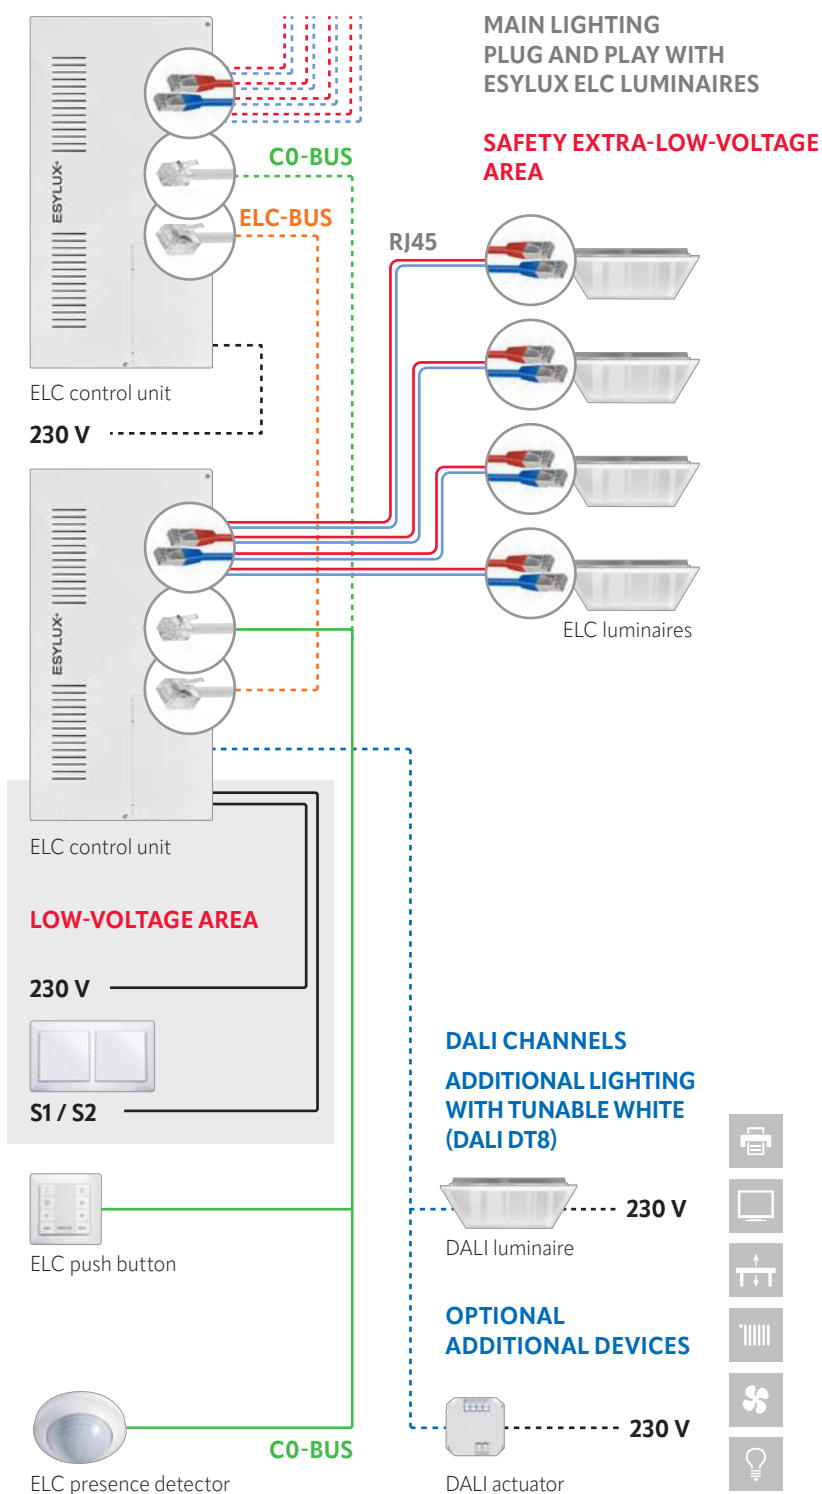

ADVANTAGES OF ELC AUTOMATION SOLUTIONS FOR INTELLIGENT LIGHTING

1. PLUG AND PLAY INSTALLATION
2. PLUG AND PLAY GROUPING
3. IMMEDIATE COMMISSIONING USING FACTORY SETTINGS WITH NO NEED FOR PROGRAMMING

RJ45

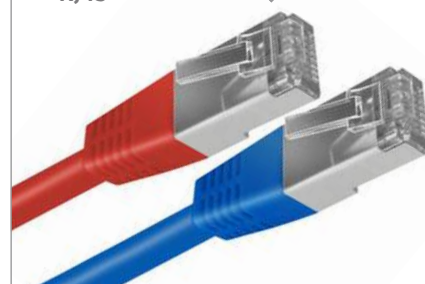

- ELC main lighting
- - - Optional expansion with further ELC luminaires
- CO bus: links the ELC devices within a group (control, sensor, push button)
- - - Optional expansion with ELC devices in a group
- - - Optional DALI supplementary lighting with Tunable White (DT8) and optional additional devices via ESYLUX switching actuator
- - - ELC bus: enables multiple groups to be connected using plug and play (SymbiLogic up to 10, otherwise up to 20 ELC control units)
- 230 V mains connection and conventional 230 V push button for manual override
- - - 230 V mains connection

DONE!

FIXED LIGHT COLOUR

3000 K / 4000 K

ADVANTAGES OF ELC AUTOMATION SOLUTIONS FOR INTELLIGENT LIGHTING

1. PLUG AND PLAY INSTALLATION
2. PLUG AND PLAY GROUPING
3. IMMEDIATE COMMISSIONING USING FACTORY SETTINGS WITH NO NEED FOR PROGRAMMING
4. ADDITIONAL LIGHTING: SIMPLE INTEGRATION OF DALI LUMINAIRES (INCLUDING FROM THIRD-PARTY PROVIDERS)


RJ45



- ELC main lighting
- - - - Optional expansion with further ELC luminaires
- C0 bus: links the ELC devices within a group (control, sensor, push button)
- - - - Optional expansion with ELC devices in a group
- - - - DALI additional lighting and DALI switch actuators e.g. ESYLUX downlights or DALI luminaires from third-party providers
- - - - ELC bus: enables multiple groups to be connected using plug and play (SymbolLogic up to 10, otherwise up to 20 ELC control units)
- 230 V mains connection and conventional 230 V push button for manual override
- - - - 230 V mains connection

MAIN LIGHTING
PLUG AND PLAY WITH
ESYLUX ELC LUMINAIRES

SAFETY EXTRA-LOW-VOLTAGE
AREA

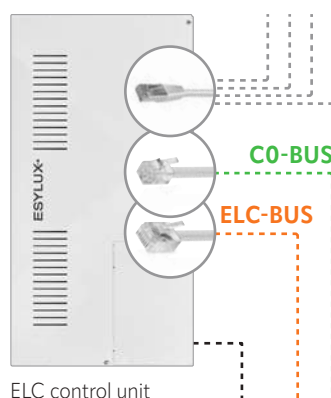


ELC control unit

230 V

RJ45

ELC luminaires

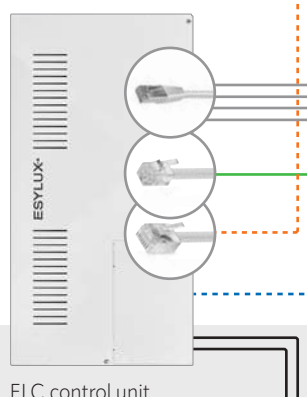

ELC control unit

LOW-VOLTAGE
AREA

230 V

S1 / S2



ELC push button



ELC presence detector

C0-BUS

DALI CHANNELS
ADDITIONAL LIGHTING
E.G. ESYLUX DALI
DOWNLIGHTS

230 V
DALI downlight

OPTIONAL
ADDITIONAL DEVICES

230 V
DALI actuator



EVERY CUSTOMER FROM THE INSTALLER TO THE END USER

Whether it is energy-efficient Human Centric Lighting with SymbiLogic technology or presence- and daylight-dependent constant light control: In offices, educational institutions and health facilities, all users enjoy the high light quality of the lighting systems and their automation comfort. But it's not just the end users who benefit – solutions are also developed with investors, planners and installers in mind. ESYLUX Light Control therefore additionally impresses due to its excellent value for money, maximum energy savings for economical building operation, and ease of installation.

ADVANTAGES FOR

INSTALLERS

- Simple installation using plug and play
- Can be commissioned immediately using factory settings with no need for programming
- ELC room solutions are simple to configure
- High-quality, reliable components
- Quick and easy to scale and adapt

END USERS AND INVESTORS

- Energy-efficient Human Centric Lighting for improved quality of life
- Demand-driven control of ventilation for excellent room air quality
- Simple operation
- Easy to set individual scenes and time functions
- Simple and customisable manual override
- Modular, scalable and can be easily adjusted to fit modified requirements
- Lower overall costs than similar room solutions
- Increase in property value

PLANNERS AND ARCHITECTS

- Future-proof, instantly usable technology
- Suitable for every building type
- Simple retrofitting in existing buildings
- Simple implementation of planning requirements
- Components that are technically compatible with one another
- Low risk of errors and easy to operate

Up to **70 %**
Potential energy
savings*




through the use of demand-driven control
combined with modern illuminants.

* Source: Initiative EnergieEffizienz,
Deutsche Energie-Agentur GmbH (dena)

Up to **90 %**
fewer 230 V connections
using SELV

R BENEFITS

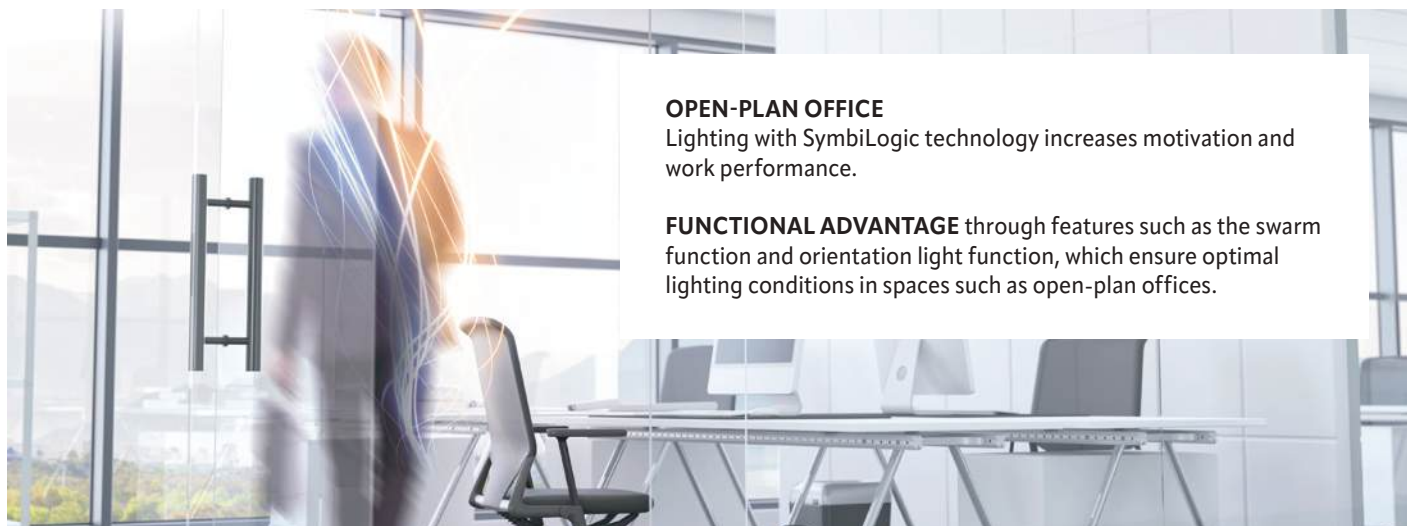

OPEN-PLAN OFFICE

Lighting with SymbiLogic technology increases motivation and work performance.


FUNCTIONAL ADVANTAGE through features such as the swarm function and orientation light function, which ensure optimal lighting conditions in spaces such as open-plan offices.



CLASSROOM

Lighting with SymbiLogic technology promotes concentration when learning.

FUNCTIONAL ADVANTAGE through features such as scenes with separate controls for different room zones to communicate learning content effectively.



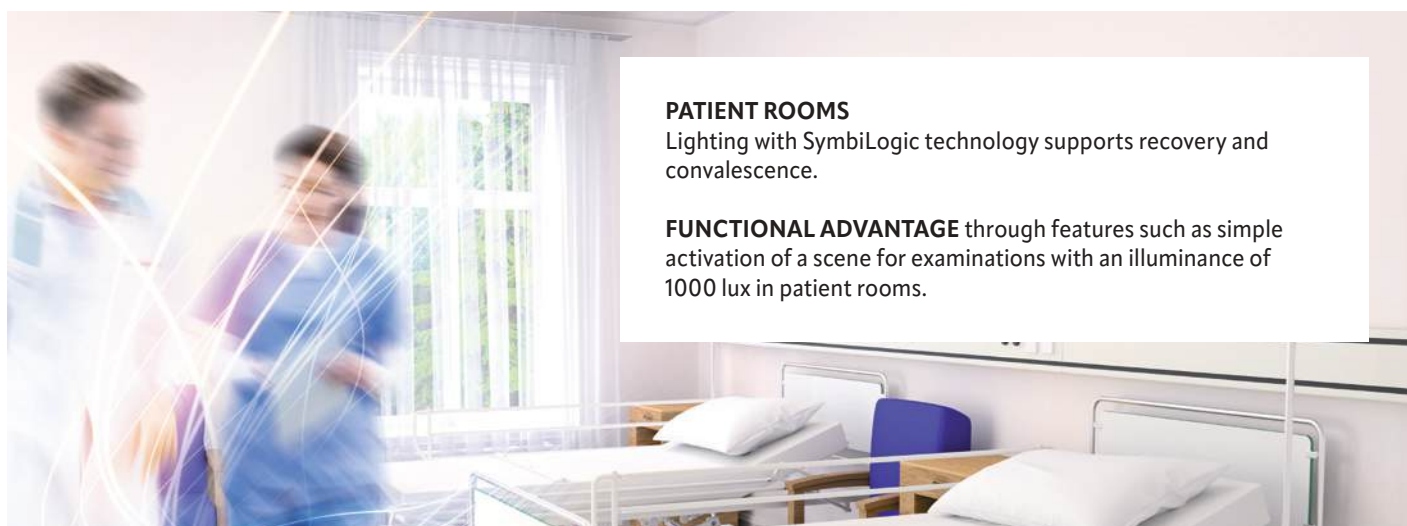


PATIENT ROOMS

Lighting with SymbiLogic technology supports recovery and convalescence.

FUNCTIONAL ADVANTAGE through features such as simple activation of a scene for examinations with an illuminance of 1000 lux in patient rooms.

ALWAYS READY WITH THE RIGHT TOOL

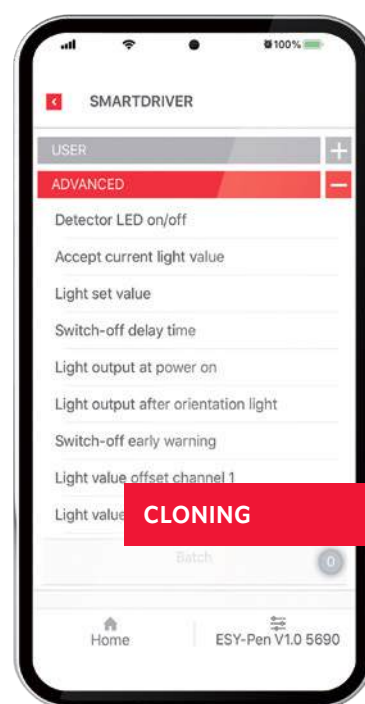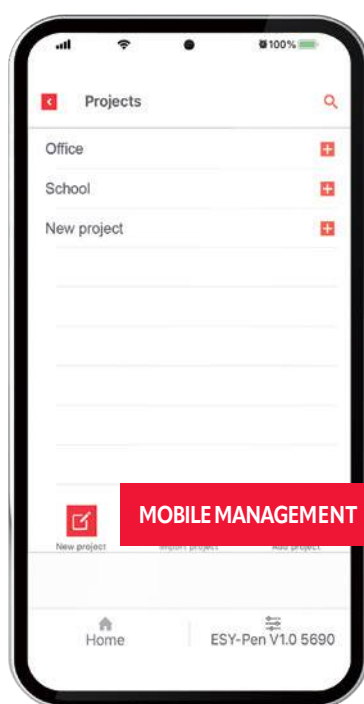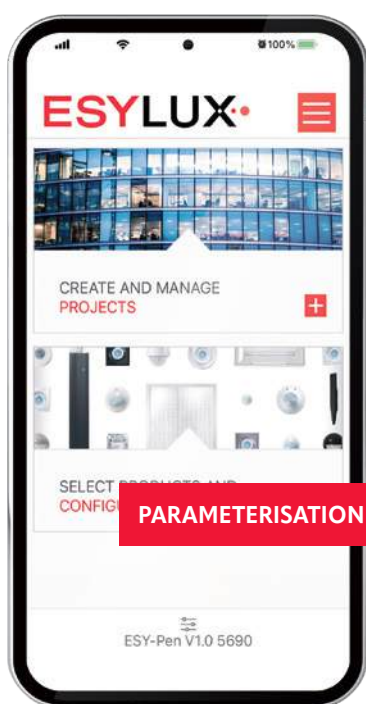

The ESY-Pen and the ESY-App make commissioning and parameterisation easy.

With the ESY-App, you have access to your project library at all times! And for optimum flexibility, you can create projects in your office and then easily transfer the configuration when at the construction site.

Previously implemented configurations can be stored and transferred to products of the same type via the ESY-Pen using the cloning function.

TH

EASY PARAMETRISATION, REMOTE CONTROL, LIGHT MEASUREMENT AND MOBILE PROJECT MANAGEMENT

Whether you use presence detectors, outdoor lights with motion detectors or lighting systems with ESYLUX Light Control, the ESY-Pen and the ESY-App ensure you always have the right tools for all remotely controlled ESYLUX solutions.




Bluetooth control for
Android and iOS



MOBILE PROJECT MANAGEMENT

The ESY-Pen and the ESY-App allow users to save, access and transfer configured projects:

- Each project can be saved with a unique name and description in the ESY-App
- No project is too big for the ESY-App: Up to 64 floors can be created, each with up to 64 rooms and up to 64 devices per room
- Within the ESY-App, a few clicks take the user from the project to the room of their choice where they can quickly identify, select and configure ESYLUX products
- Configured projects can be stored in the ESY-App or forwarded on to other users as necessary. Previously stored configurations can be easily transferred to products of the same type via the ESY-Pen using the cloning function
- The project documentation is integrated into a project report that can then be sent as a PDF document and also printed off as required

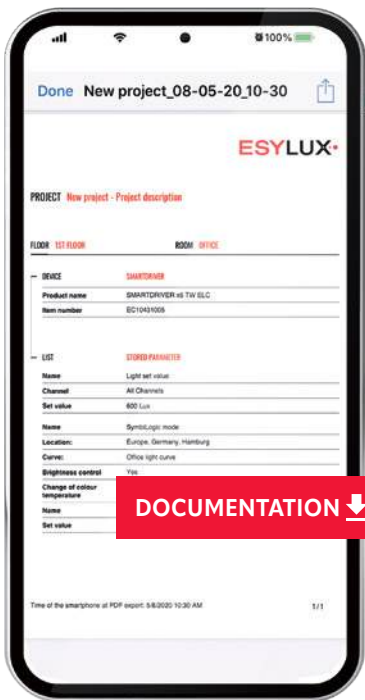

The project documentation is integrated into a PDF report that can then be emailed and printed off as required.

THE DIFFERENCE

PRESENCE AND MOTION DETECTORS


Both device types have a sensor system for motion detection and a light sensor system for brightness measurement. Nevertheless, presence detectors and motion detectors are each suitable for different applications.

MOTION DETECTORS

Motion detectors detect larger movements within their detection range, for example when a person is walking forward or gestures in a disorderly manner. As soon as motion detectors detect a movement, they measure the brightness once with their light sensor technology. If this is below the previously set brightness value, they activate the lighting. If they no longer detect any movement, they switch off the light again at the end of the follow-up time..

APPLICATION AREAS

Motion detectors, with their simpler motion sensor technology and unique light measurement, are ideally suited for passageways, sanitary areas and side rooms with little daylight or short-term use, as well as for outdoor applications.

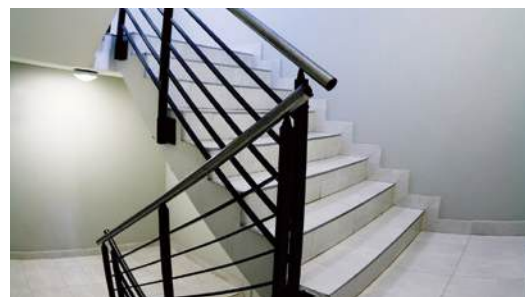

PRESENCE DETECTORS

Presence detectors also detect larger movements, but within their presence range they also register fine motoric and even the smallest movements such as typing on a PC keyboard. Unlike motion detectors, presence detectors can therefore detect the permanent presence of people - for example at a desk in the office.

If movement is detected and brightness is insufficient, presence detectors activate the lighting. Unlike motion detectors, however, they do not measure light just once but repeat the measurement as long as they detect presence. If the required illuminance is already achieved by daylight or ambient light, presence detectors switch off the artificial light in an energy-saving manner even if there is a human presence. Alternatively, they deactivate the lighting at the end of the switch-off delay time.

Presence detectors with constant-light control provide even greater convenience and energy efficiency when people are present. Because based on their continuous light measurement, they can continuously adjust the illuminance of the artificial light to the natural lighting conditions by dimming.

APPLICATION AREAS

Presence detectors are ideally suited for indoor areas where people are permanently present, especially in areas with daylight, due to their more precise motion detection and continuous light measurement. They are therefore preferred for use in offices, classrooms or recreation rooms, for example.



DIFFUSERS AND COLOUR TEMPERATURE

AN OVERVIEW

Diffusers have a significant influence on the optical perception and glare suppression of the lighting, and the colour temperature changes the emotional and biological effect of the light. ESYLUX offers a suitable selection.

DIFFUSERS AND COVERS

Different combinations of finely structured surfaces and stronger or weaker opacity give ESYLUX lighting an equally attractive and characteristic appearance.

Diffuser surface:

DDP = micro-prismatic

Diffuser opacity:

TR = transparent


OP = opal

SO = semi-opal

COLOUR TEMPERATURE

The colour temperature in Kelvin describes the light colour of a light source and ranges from below 3000 Kelvin (warm white) to over 5300 Kelvin (daylight white) with common light sources. ESYLUX lighting solutions with SymbiLogic technology and Tunable White offer variable control between the two ranges and energy-efficient Human Centric Lighting.

2700 – 6500 K = Tunable White




3000 K = warm white



4000 K = neutral white



5000 K = daylight white



Diffuser:

DDP OP
(micro-prismatic, opal)



Left:


Tunable White

Right:

Fixed light colour

Diffuser:

DDP TR
(micro-prismatic, transparent)

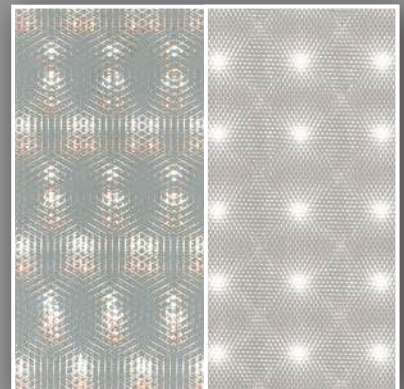

Diffuser:

OP (opal)



COVERS FOR WA

COMPATIBLE WITH BRAND SWITCHES

Whether a new building or a quick replacement during ongoing operation:
For the modernisation of buildings with wall presence and motion detectors,
suitable covers and often their compatibility with common brand switches are
essential. ESYLUX therefore offers a wide range of accessories - allowing easy
conversion to contactless energy efficiency!



Example detector:
PD-C 180i KNX



Individual switch range
Single or multiple frames
from the switch manufacturers



Subframe
as adapter for 50 x 50 mm standard
cut-out in accordance with DIN 49075
(switch manufacturer accessory)



Cover
for wall detectors (different
colours as accessories)



PD-C 180i KNX
in the individual
switch range

Product group/product name	Item no.	Product description	Dimensions (mm)	Core portfolio	New product
Accessories					
Cover					
COVER IP20 WH	EM10055102	Cover for wall detectors from the STANDARD series, IP20, white, similar to RAL 9010	X 87, Y 87, Z 29	•	
COVER IP20 SWH	EM10055119	Cover for wall detectors from the STANDARD series, IP20, white, similar to RAL 9016	X 87, Y 87, Z 29	•	
COVER IP20 CWH	EM10055126	Cover for wall detectors from the STANDARD series, IP20, cream white, similar to RAL 1013	X 87, Y 87, Z 29	•	
COVER IP20 AN	EM10055133	Cover for wall detectors from the STANDARD series, IP20, anthracite, similar to RAL 7021	X 87, Y 87, Z 29	•	
COVER IP20 SR	EM10055140	Cover for wall detectors from the STANDARD series, IP20, silver	X 87, Y 87, Z 29	•	
COVER ELK RS/PLUS IP20 WH	EM10055270	Cover for wall detector fits with Berker S.1, IP20, polar white	X 56, Y 56, Z 27	•	
COVER BER S1 IP20 PWH	EP10427107	Cover for wall detector fits with Berker S.1, IP20, polar white	X 55, Y 55, Z 27	•	
COVER BER S1 IP20 WH	EP10427114	Cover for wall detector fits with Berker S.1, IP20, white	X 55, Y 55, Z 27		
COVER BER MOD2 IP20 PWH	EP10427121	Cover for wall detector fits with Berker module 2, IP20, polar white	X 55, Y 55, Z 27		
COVER BER MOD2 IP20 WH	EP10427138	Cover for wall detector fits with Berker module 2, IP20, white	X 55, Y 55, Z 27		
COVER BUJ REF IP20 WH	EP10427145	Cover for wall detector fits with Busch-Jäger Reflex, IP20, white	X 55, Y 55, Z 27	•	
COVER GIR S55 IP20 WH	EP10427169	Cover for wall detector fits with Gira Standard 55, IP20, white	X 55, Y 55, Z 27	•	
COVER GIR S55 IP20 CWH	EP10427176	Cover for wall detector fits with Gira Standard 55, IP20, cream white	X 55, Y 55, Z 27		
COVER IP44 WH	EM10055157	Cover for wall detectors from the STANDARD series, IP44, white	X 87, Y 87, Z 67	•	
MOUNTING BOX IP44 SM WH	EM10055164	Surface-mounted box for wall detectors from the STANDARD series, IP44, white	X 87, Y 87, Z 49	•	

LL DETECTORS



Product group/product name	Item no.	Detection angle	Detection range	Installation type	Number of light channels	Function	Constant lighting control	Push button input lighting	In-rush current	Adjustable switch-off delay time	Number of HVAC channels	Push button input HVAC	Slave input	Protection type	Dimensions (mm)	Circuit diagram	Core portfolio	New product
Presence detectors																		
12 - 36 V UC																		
PD-C 180i/16 UC (opal-matt)	EP10427305	180°	Ø 16 m	FM	1	Switching/ Send values	•	1		•				IP20	X 70, Y 70, Z 55	CU	•	
KNX																		
PD-C 180i KNX ECO (white, similar to RAL 9010)	EP10426452	180°	Ø 16 m	FM	2	Switching		1		•			•	IP20	X 70, Y 70, Z 55	0	•	
PD-C 180i KNX (white, similar to RAL 9010)	EP10426445	180°	Ø 16 m	FM	2	Switching/ Regulate	•	1		•	1		•	IP20	X 70, Y 70, Z 55	0	•	
PD-C 180i/16 Touch KNX (white, similar to RAL 9010)	EP10460104	180°	Ø 16 m	FM	2	Switching/ Regulate	•	1		•	1	•	•	IP40	X 70, Y 70, Z 55	0	•	
ON/OFF																		
MD/PD 180 Slave (opal-matt)	EM10410024	180°	Ø 16 m	FM		Send values								IP20	X 70, Y 70, Z 29	AS	•	
PD 180i/R (opal-matt)	EM10410017	180°	Ø 16 m	FM	1	Switching		1	800 A / 200 µs	•	1		•	IP20	X 70, Y 70, Z 29	AR	•	
Motion detectors																		
ON/OFF																		
MD 180i/R (opal-matt)	EM10055010	180°	Ø 16 m	FM	1	Switching		1	800 A / 200 µs	•			•	IP20	X 70, Y 70, Z 29	AN	•	
MD 180i/16 BASIC (opal-matt)	EB10430459	180°	Ø 16 m	FM	1	Switching		1	800 A / 200 µs	•				IP40	X 70, Y 70, Z 55	X	•	

PRODUCT NAMING

SIMPLY DECODED

Our naming scheme in the lighting category complies with the international industry standard and draws its components from the most important features and performance data. Following the series name and the device category, this includes, for example, abbreviated designations for luminous flux, CRI value or diffuser characteristics. So you can see instantly which lighting component or solution is suitable for the requirements of your project.

Example lighting systems: QUADRO-SET

QUADRO-SET	CELINE-2	HCL	625	DDP	OP	8TW	IR	ELC
1.	2.	3.	4.	5.	6.	7.	8.	9.



Differentiator	Description
1. SERIES	
QUADRO-SET	= For offices
2. TYPE OF LUMINAIRE	
CELINE-2	= ESYLUX CELINE-2 series
3. FUNCTION	
HCL	= Human Centric Lighting
4. DIMENSIONS OF THE LUMINAIRE	
600	= 600 x 600 mm
625	= 625 x 625 mm
5. DIFFUSER SURFACE	
DDP	= Micro-prismatic

Differentiator	Description
6. DIFFUSER OPACITY	
OP	= Opal
TR	= Transparent
7. COLOUR RENDERING INDEX AND TEMPERATURE	
840	= CRI >80; 4000 K
8TW	= CRI >80; 2700 - 6500 K
8. COMMUNICATION	
IR	= Remote control via infrared
9. CONTROL TECHNOLOGY	
ELC	= ESYLUX Light Control

G LIGHTING

Example recessed lights: CELINE -2 series

CELINE-2	PNL	625	DDP	OP	3600	830	IP20	ELC	DALI	DT8	SET
1.	2.	3.	4.	5.	6.	7.	8.	9.	10.	11.	



Differentiator	Description
1. SERIES	
2. DEVICE CATEGORY	
PNL	= Recessed light
3. DIMENSIONS	
600	= 600 x 600 mm
625	= 625 x 625 mm
4. DIFFUSER SURFACE	
DDP	= Micro-prismatic
LDP	= Linear-prismatic
5. DIFFUSER OPACITY	
OP	= Opal
TR	= Transparent
6. LUMINOUS FLUX	

Differentiator	Description
7. COLOUR RENDERING INDEX AND TEMPERATURE	
830	= CRI >80; 3000 K
840	= CRI >80; 4000 K
8TW	= CRI >80; 2700 - 6500 K
8. IP PROTECTION CLASS	
9. CONTROL TECHNOLOGY	
ELC	= ESYLUX Light Control
10. INTERFACE	
DALI, DALI-2, DALI-2 DT8	= Digital Addressable Lighting Interface
11. SET	= Luminaire including driver set

Example wall and ceiling lights: SVENJA series

SVENJA	CL	450	DDP	OP	3400	8TW	IP20	DALI-2	DT8
1.	2.	3.	4.	5.	6.	7.	8.	9.	



Differentiator	Description
1. SERIES	
2. DEVICE CATEGORY	
WCL	= Wall and ceiling light
CL	= Ceiling light
3. DIMENSIONS	
	= In millimetres (mm)
4. DIFFUSER SURFACE	
DDP	= Micro-prismatic
5. DIFFUSER OPACITY	
OP	= Opal
6. LUMINOUS FLUX	

Differentiator	Description
7. COLOUR RENDERING INDEX AND TEMPERATURE	
830	= CRI >80; 3000 K
840	= CRI >80; 4000 K
8TW	= CRI >80; 2700 - 6500 K
8. IP PROTECTION CLASS	
9. INTERFACE	
DALI, DALI-2, DALI-2 DT8	= Digital Addressable Lighting Interface

Example downlights: ELSA-2 series

ELSA-2	DL	225	OP	110°	1800	840	PD	IR	PS	DALI	WH
1.	2.	3.	4.	5.	6.	7.	8.	9.	10.	11.	12.



Differentiator	Description
1. SERIES	
2. DEVICE CATEGORY	
DL	= Downlight
3. DIMENSIONS	
	= In millimetres (mm)
4. DIFFUSER SURFACE	
OP	= Opal
5. BEAM ANGLE	
6. LUMINOUS FLUX	
7. COLOUR RENDERING INDEX AND TEMPERATURE	
830	= CRI >80; 3000 K
840	= CRI >80; 4000 K

Differentiator	Description
8. AUTOMATION	
MD	= Motion detector included
PD	= Presence detector included
9. COMMUNICATION	
IR	= Remote control via infrared
10. POWER SUPPLY	
PS	= Power supply included
11. INTERFACE	
DALI	= Digital Addressable Lighting Interface
12. COLOUR	
WH	= White

Example moisture-proof lights: OLIVIA-2 series

OLIVIA-2	MPL	1500	OP	6800	840	IP66	3h	5x2.5	MD	DALI-2
1.	2.	3.	4.	5.	6.	7.	8.	9.	10.	11.



Differentiator	Description
1. SERIES	
2. DEVICE CATEGORY	
MPL	= Moisture-proof light
3. DIMENSIONS	= In millimetres (mm)
4. DIFFUSER OPACITY	
OP	= Opal
5. LUMINOUS FLUX	
6. COLOUR RENDERING INDEX AND TEMPERATURE	
840	= CRI >80; 4000 K

Differentiator	Description
7. IP PROTECTION CLASS	
8. BURN TIME	= In hours (h)
9. THROUGH-WIRING	= Number of connections/conductor cross-section
10. AUTOMATION	
MD	= Motion detector included
11. INTERFACE	
DALI-2	= Digital Addressable Lighting Interface

Example emergency lights: SLC/SLD series

SLC/SLD	EL	LED	3h	25m	IR	SC/C	WBM
1.	2.	3.	5.	7.	8.	9.	10.



Differentiator	Description
1. SERIES	
2. DEVICE CATEGORY	
EL	= Emergency lights
3. LIGHT SOURCE	
FLP	= Fluorescent lamp
LED	= LED
4. HOUSING	
DISPLAY	= Display disc
FLAT COVER	= Flat cover
HIGH COVER	= High cover
5. BURN TIME	= In hours (h)
6. POWER SUPPLY	
CPS	= Central power supply
7. VIEWING DISTANCE	= In metres (m)

Differentiator	Description
8. COMMUNICATION	
IR	= Remote control
9. FUNCTION	
SC	= Self control
SC/C	= Self control / fail-safe contact
10. TYPE OF INSTALLATION	
RM	= Recessed ceiling mounting
SM	= Surface ceiling mounting
WBM	= Wall bracket mounting
WM	= Wall mounting
PM	= Pendulum mounting
11. APPLICATION AREA	
CORRIDOR	= Long hallways
OFFICE	= Large rooms

Example wall and ceiling lights: OL/AOL series

AOL	WL	200	OP	1600	830	MD	WH
1.	2.	3.	4.	5.	6.	7.	8.



Differentiator	Description
1. SERIES	
2. DEVICE CATEGORY	
3. DIMENSIONS	
4. DIFFUSER OPACITY	
5. LUMINOUS FLUX	

Differentiator	Description
6. COLOUR RENDERING INDEX AND TEMPERATURE	
7. AUTOMATION	
8. COLOUR	

Example bollard lights: ALVA BL series

ALVA	BL	700/100	TR	360°	600	840	MD	IR	DALI	AN
1.	2.	3.	4.	5.	6.	7.	8.	9.	10.	11.



Differentiator	Description
1. SERIES	
2. DEVICE CATEGORY	
BL	= Bollard light
3. DIMENSIONS	
540 / 170	= 540 mm x Ø 170 mm
940 / 170	= 940 mm x Ø 170 mm
700 / 100	= 700 mm x Ø 100 mm
4. DIFFUSER SURFACE	
OP	= Opal
TR	= Transparent
5. BEAM ANGLE	
6. LUMINOUS FLUX	

Differentiator	Description
7. COLOUR RENDERING INDEX AND TEMPERATURE	
830	= CRI >80; 3000 K
840	= CRI >80; 4000 K
8. AUTOMATION	
MD	= Motion detector included
9. COMMUNICATION	
IR	= Remote control via infrared
10. INTERFACE	
DALI	= Digital Addressable Lighting Interface
11. COLOUR	
AN	= Anthracite / Graphite Grey
WH	= White

Example floodlights: SUN OFL/AFL series

SUN

AFL

TR

5600

850

MD

BK

1.

2.

3.

4.

5.

6.

7.



Differentiator		Description
1. SERIES		
2. DEVICE CATEGORY		
OFL	=	Outdoor Floodlight
AFL	=	Automatic floodlight
3. DIFFUSER OPACITY		
TR	=	Transparent
4. LUMINOUS FLUX		
5. COLOUR RENDERING INDEX AND TEMPERATURE		
830	=	CRI >80; 3000 K
840	=	CRI >80; 4000 K
850	=	CRI >80; 5000 K

Differentiator		Description
6. AUTOMATION		
MD	=	Motion detector included
7. COLOUR		
BK	=	Black
WH	=	White

If you are in the product section of the ESYLUX website and do not know one or more components of a product name, simply move the mouse over the respective name sections. A tooltip then automatically displays a short description.

A TOOLTIP HELPS ON THE WEB

ESYLUX

OTHER COUNTRIES | ENGLISH

ITEM NUMBER, KEYWORD

SOLUTIONS | PRODUCTS | INNOVATIONS | COMPANY | SERVICE | PRESS

CAREERS | INTERNATIONAL | EXHIBITIONS | CONTACT

Indoor lighting | Wall and ceiling lights | SVENJA | 450 mm

TECHNICAL DATA | DOWNLOADS | ACCESSORIES | BIM | LIGHT CALCULATION

WALL AND CEILING LIGHTS | SERIE SVENJA

3D

DIFFUSOR SURFACE: MICRO-PRISMATIC

SVENJA CL 450 **DDP** OP 3300 830 IP20

ITEM NUMBER EO108 192 | GTIN 4015120850592

High light quality, visual comfort through perfect glare suppression, easy to install: This is what characterises the SVENJA series LED surface-mounted lights. With a timeless, modern design, a high proportion of indirect light and the appearance of floating lights, they are ideal for use as atmospheric lighting solutions in social areas such as foyers, assembly halls, break areas and canteens. DALI-2 variants deliver presence and daylight dependent constant light control in schools, residential homes, hospitals and offices.

Whether luminous flux, light colour or control technology: the tooltip has the right answer for everything ▲

PRODUCT NAMING

SIMPLY DECODED

The product names of our presence and motion detectors are based on a structure that has been familiar to our customers for many years and allows them to easily navigate through our series - for example FLAT, COMPACT or ATMO.

We harmonise series that will be launched on the market from 2020 onwards according to the basic principles of the naming scheme in the lighting category. In the medium to long term, this gives you an even easier overview of our entire portfolio. DEFENSOR shows an example of the introduction of a new series.

Example detectors: COMPACT series

PD	-	C	360	i	/	24	DUODIMplus-FM
1.	2.	3.	4.	5.	6.		



Differentiator	Description
1. DEVICE CATEGORY	
2. SERIES	
ATMO	= Multisensor
C	= Compact
mini	= Small recessed ceiling mounted version
CE	= Compact Express (Recessed ceiling version)
FLAT	= Flat construction
BASIC	= Entry-level products
STANDARD	= State-of-the-art technology
RC, MD, MD-W	= High quality outdoor detectors
3. ANGLE OF DETECTION	= In degrees (°)
4. REMOTE CONTROL	= i = infrared
5. Ø DETECTION RANGE	= In metres (m)
6. FUNCTION	
plus	= HVAC-contact
touch	= Operation possible by touch
MIC	= Integrated acoustic sensor
DRY	= Break contact/floating
DUO	= 2-channel light measurement

Differentiator	Description
DIM	= Continuous lighting control
R	= Relay output
ELC	= ESYLUX Light Control
HCL	= Human Centric Lighting
BMS	= Building Management Systems
PS	= Power Supply included
DALI / DALI-2	= Digital Addressable Lighting Interface
KNX	= Fieldbus for building automation
UP	= Software upgrade
ECO	= Reduced functionality
UC	= 12 - 36 V AC/DC
WH / Warehouse	= Suitable for high-bay storage
Corridor	= Suitable for corridors / hallways
SM	= Surface-mounted version
SMB	= Surface-mounted version including box
FM	= Flush-mounted version
GST	= Pre-assembled WIELAND/GST 18-line
WAGO	= Pre-assembled WAGO WINSTA® line
Slave	= Auxiliary post

DETECTORS

Example outdoor motion detectors: DEFENSOR series

DEFENSOR	MD	280°	40	IR	1C	IP55	WH
1.	2.	3.	4.	5.	6.	7.	8.



Differentiator	Description	
1. SERIES		
2. DEVICE CATEGORY		
MD	=	Motion detector
3. ANGLE OF DETECTION		
	=	In degrees (°)
4. DETECTION RANGE		
Angle of detection up to 180°	=	Radius in metres (m)
Angle of detection from 180°	=	Diameter in metres (m)
5. COMMUNICATION		
IR	=	Remote control (infrared)

Differentiator	Description	
6. NUMBER OF LIGHT CHANNELS		
1C	=	1 light channel
2C	=	2 light channels
7. IP PROTECTION CLASS		
8. COLOUR		
AN	=	Anthracite / Graphite Grey
WH	=	White

SIMPLY BEING A GOOD PARTNER: FROM PLANNING THROUGH TO THE LAST DETAIL

LET US TACKLE NEW TASKS TOGETHER

For ESYLUX, excellent service above all means being close to the customer. Our experts can provide advice and support in all phases of your project – from planning energy-efficient solutions and selecting products through to installation and reliable support via our technical hotline. What is more, you benefit from our helpful tools, training opportunities for planners, traders and technicians in the ESYLUX Academy, and an extended manufacturer's warranty.

Why not put ESYLUX to the test: We accept any challenge and look forward to implementing exciting projects with you. And we will prove that everybody benefits from demand-driven automation of optimum light and good-quality air: a gain for people, for the environment, and for your balance sheet. Welcome to ESYLUX.

THIS PRODUCT OVERVIEW IS INTENDED AS A WORKING BASIS FOR BUSINESSES.

The information in this product overview is not binding in relation to the illustrations, design, size and colour of the products shown. We reserve the right to make changes to technology and designs with a view to improving the quality of the products. For any technical questions or to order promotional material, please contact your wholesaler or contact the ESYLUX sales department directly. Subject to error.

ESYLUX products are only supplied to trade specialists through the specialist wholesaler.



ESYLUX ACADEMY

Informing and instructing our customers is of utmost importance to us.



SUPPORT FOR PLANNING AND PROJECT MANAGEMENT

From project planning through to completion, we are always at your side when you need us.



EXTENDED MANUFACTURER'S WARRANTY

Quality is often just an empty promise. For us, it is an obligation.



ONLINE DOCUMENTATION

Information is precious – if it is easy to find and use.



www.esylux.com

Photo credits::

Fotolia: 8904067, 90617590, 78426683, 90617590, 77477773, 59657957, 35852074, 71267036 | Gettyimages: 495604235, 505271706, 153362937, 707454797, 637249110, 518345403, 498111465, 488888801, 669105200, 457983239 | iStock: A, 495482808, 636344050, 485850141, 588391268, 108195326, 542299962, 155350714 | Shutterstock: 153727712, 480633175 | Thinkstock: 664765172, 848365574, 178629277 | Strandperle: 9818502

For delivery times and further information on our products, please refer to our website.

© Copyright 2024

ZPEX930218 • 02/24 • DF

